

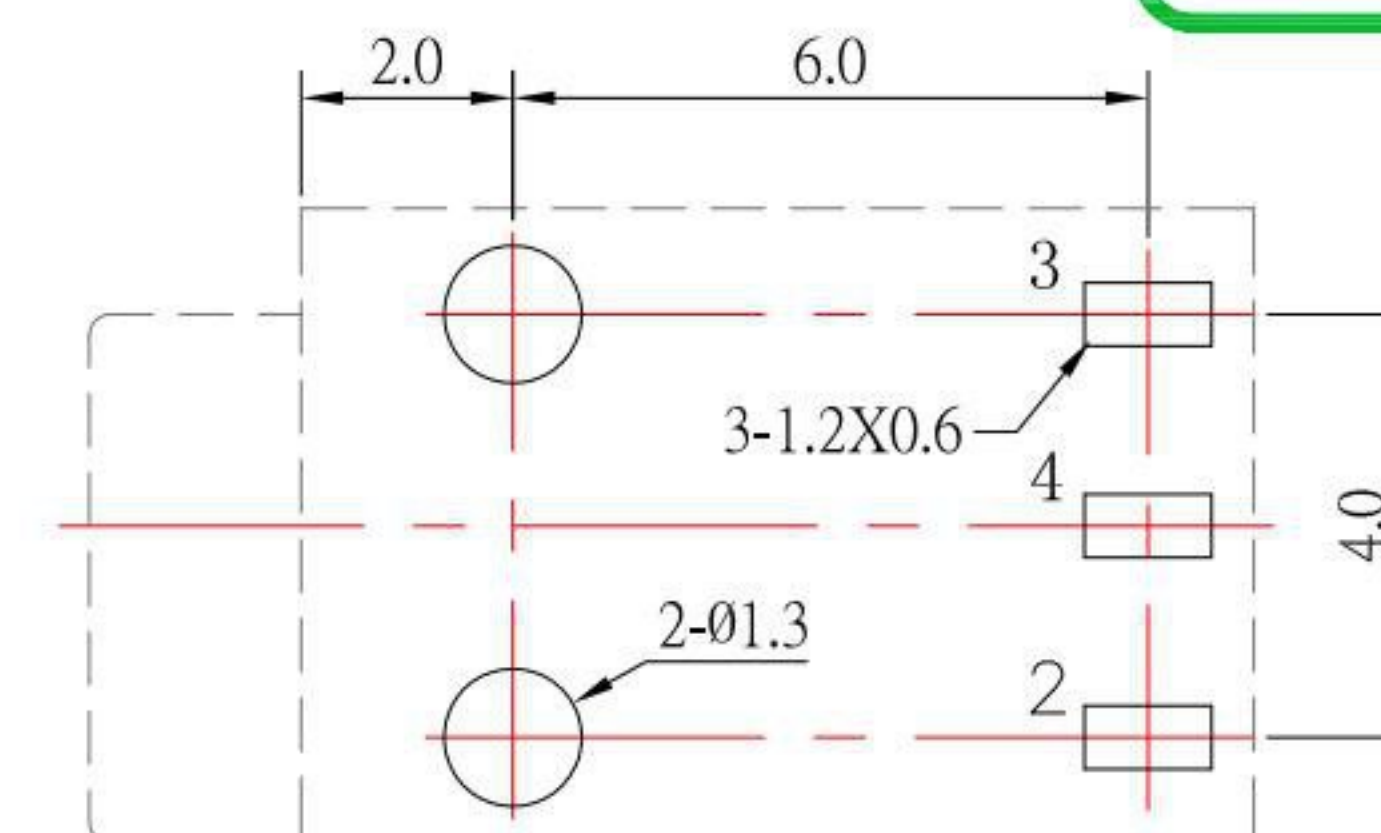
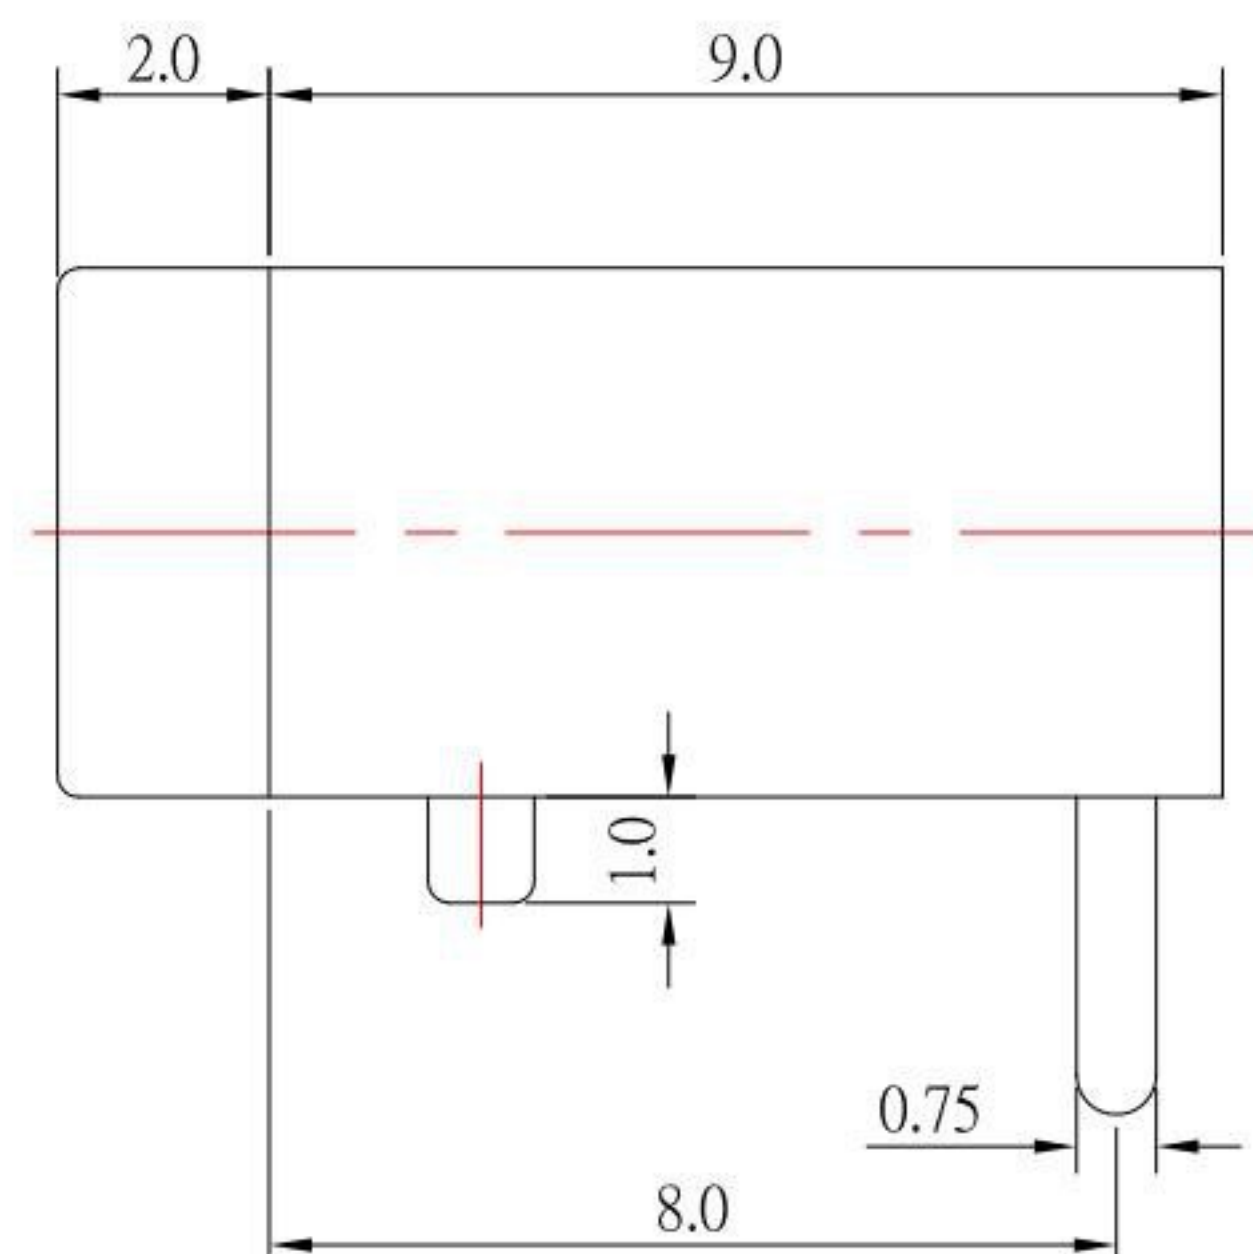
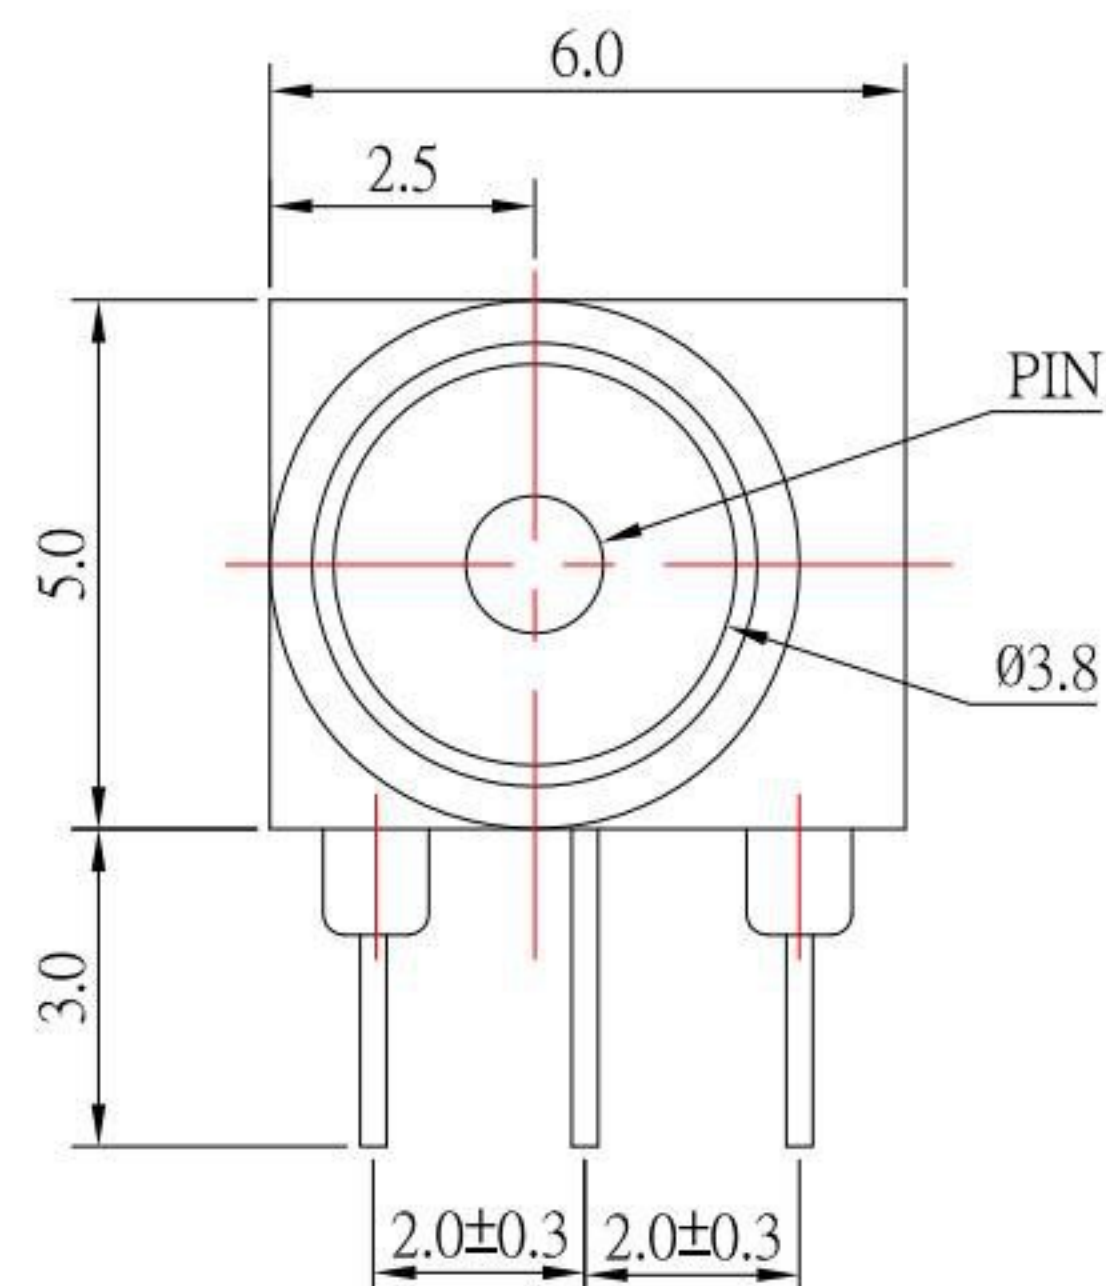


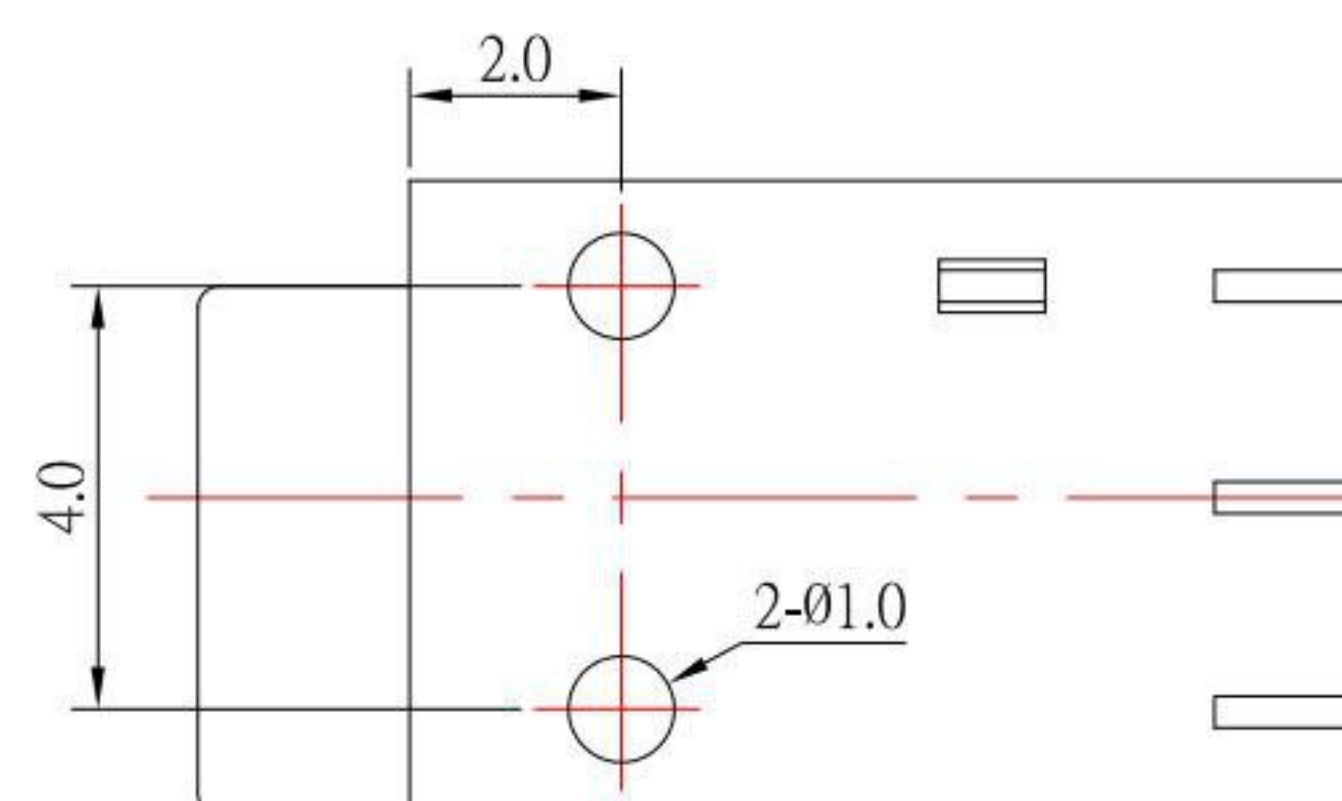



P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

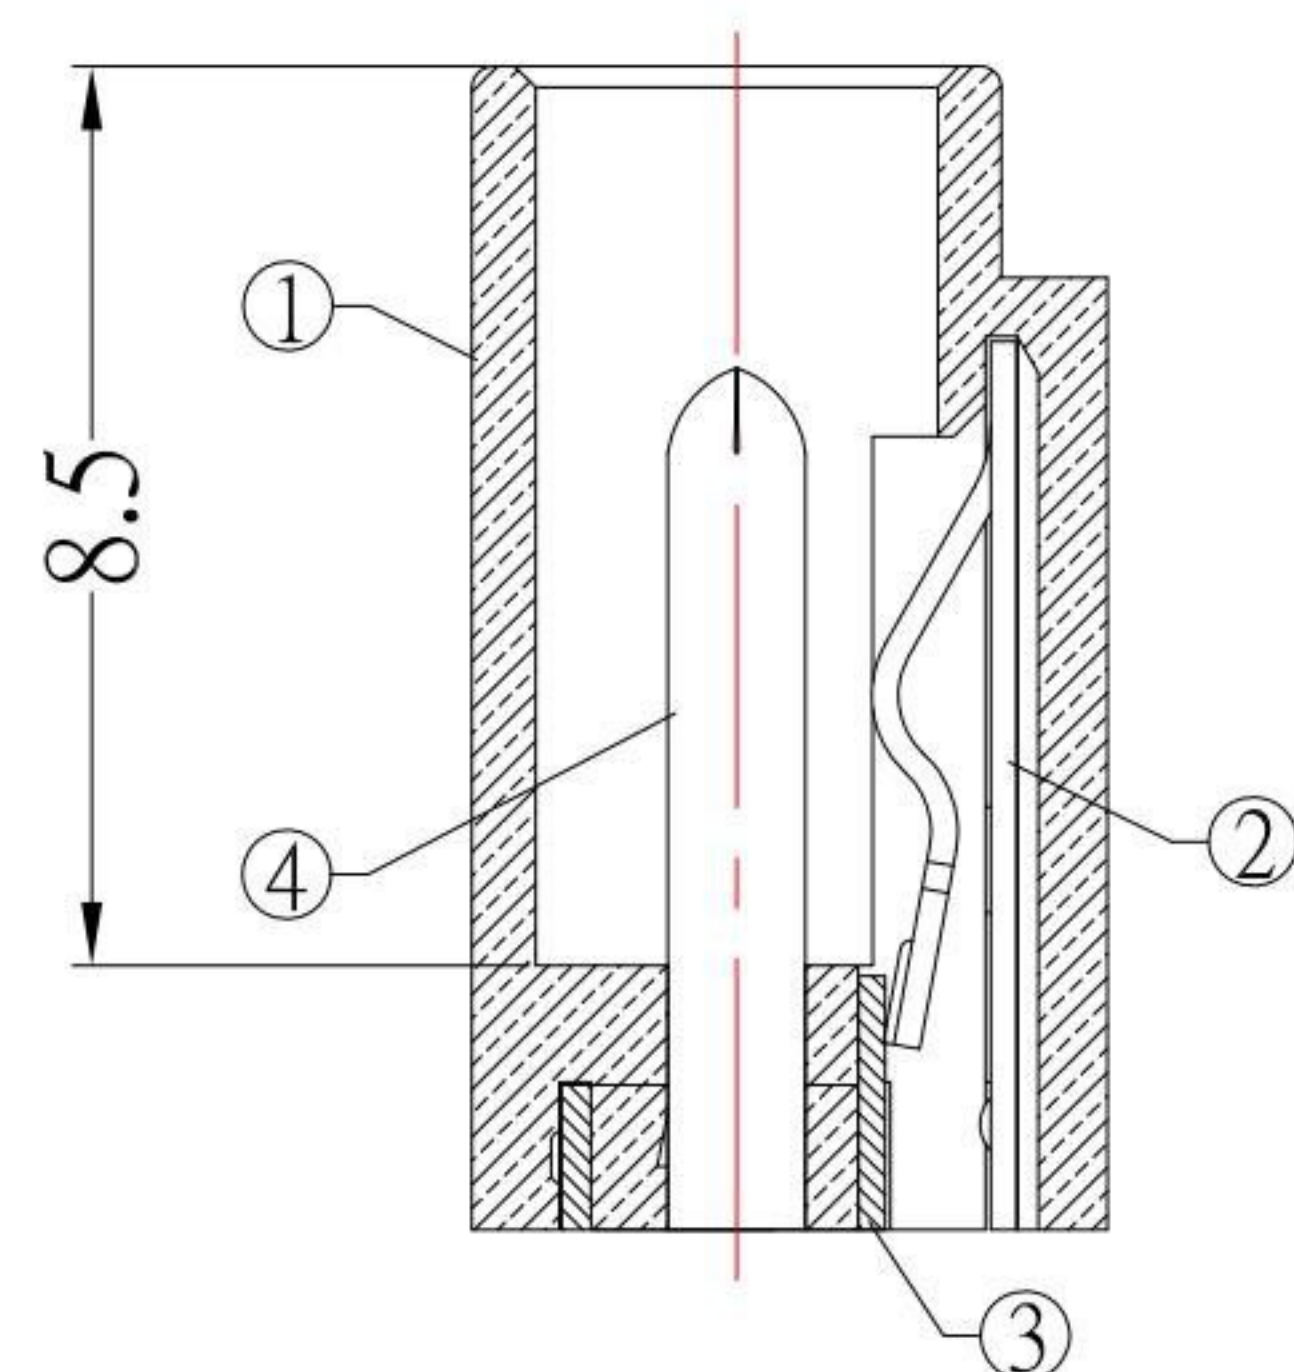

SPECIFICATION

- 1.Rating : DC 30V 1.0A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

MODEL NO.	DC-022-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0 mm
	Ø1.3 mm

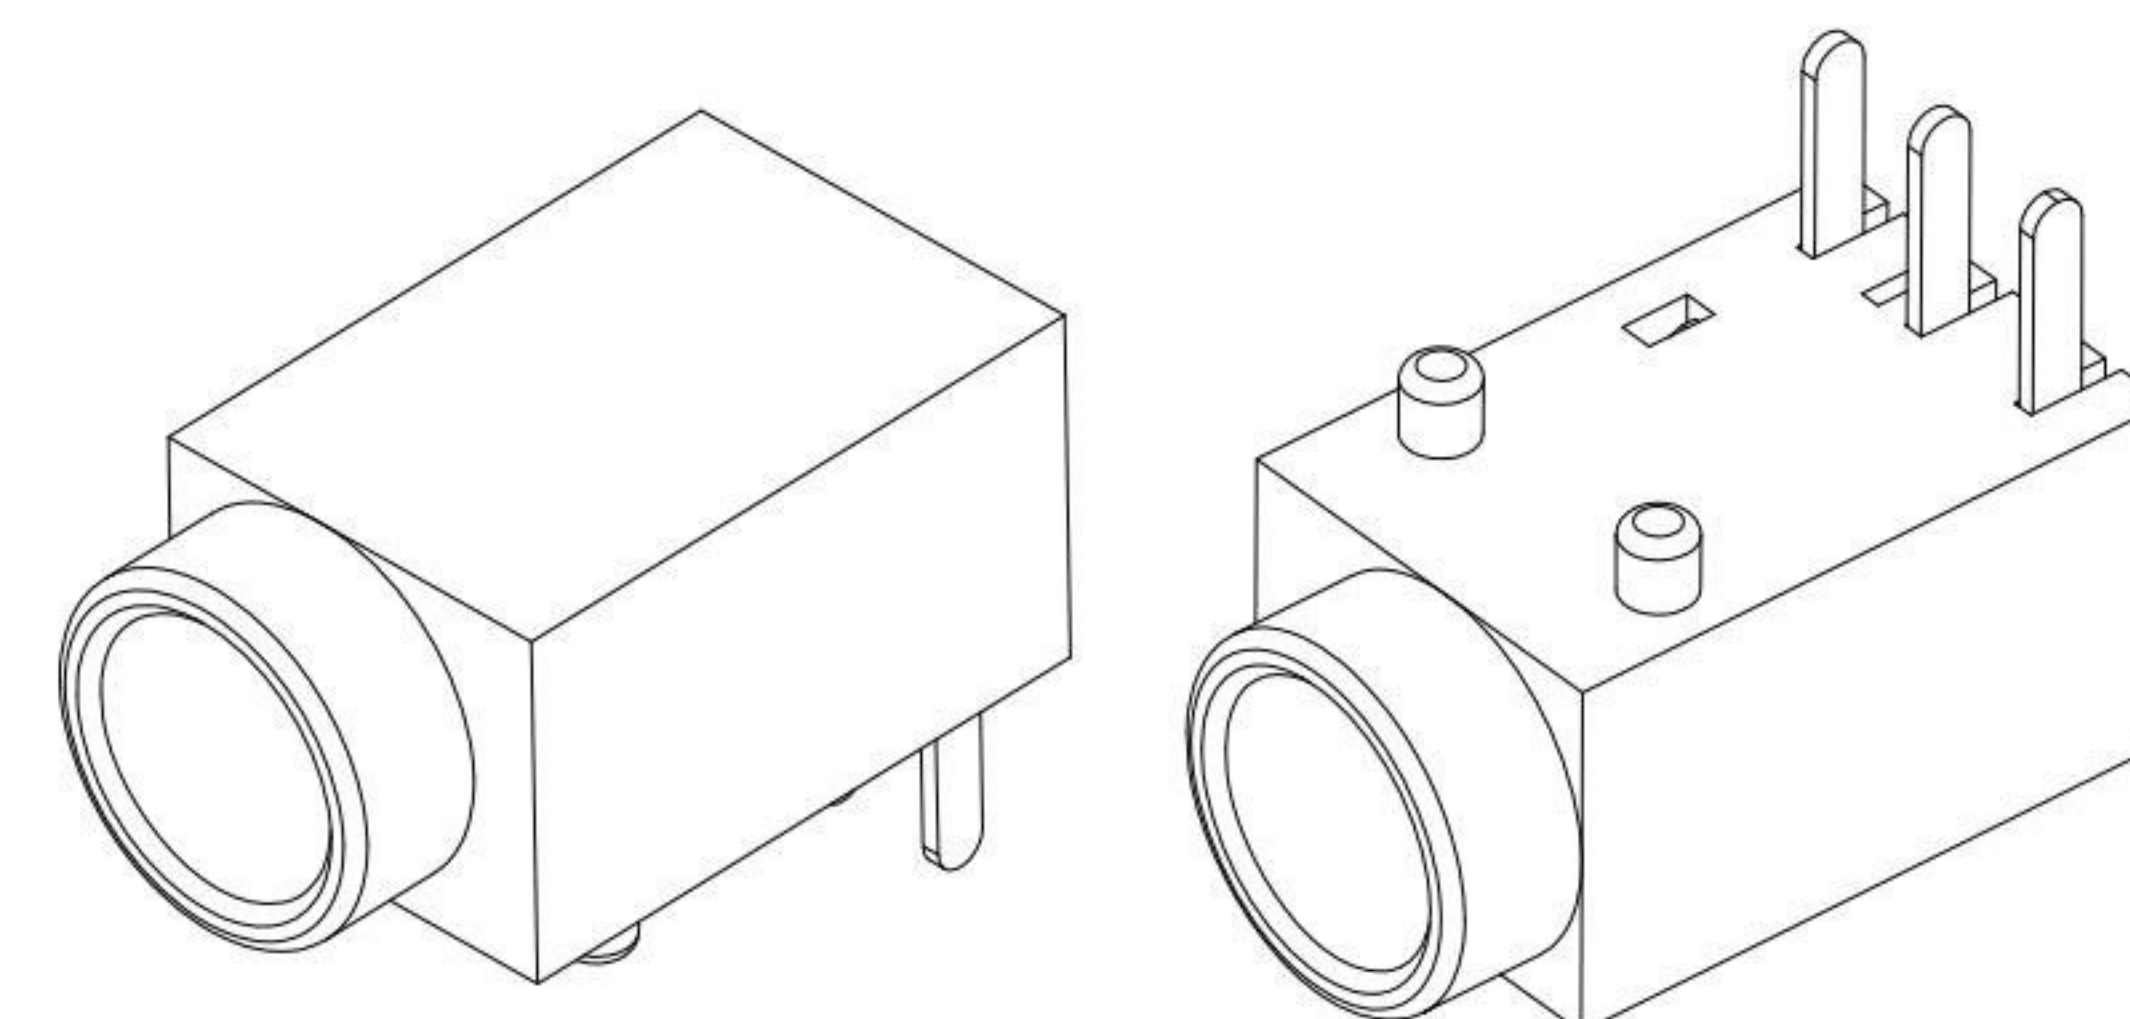

4	PIN	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	SUS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	05/19/17					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	05/19/17					
		SCALE	1 : 1	DWG NO.	DC-022-x-S124	SIZE
APPROVED BY:	DATE					A4
Tony Kao	05/19/17	SHEET NO.	1 of 1	PART NO.	DC-022-x-S124	VER
						R

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互联零组件制造企业 KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

ITEM NO.	DESCRIPTION	DRAWN	DATE