

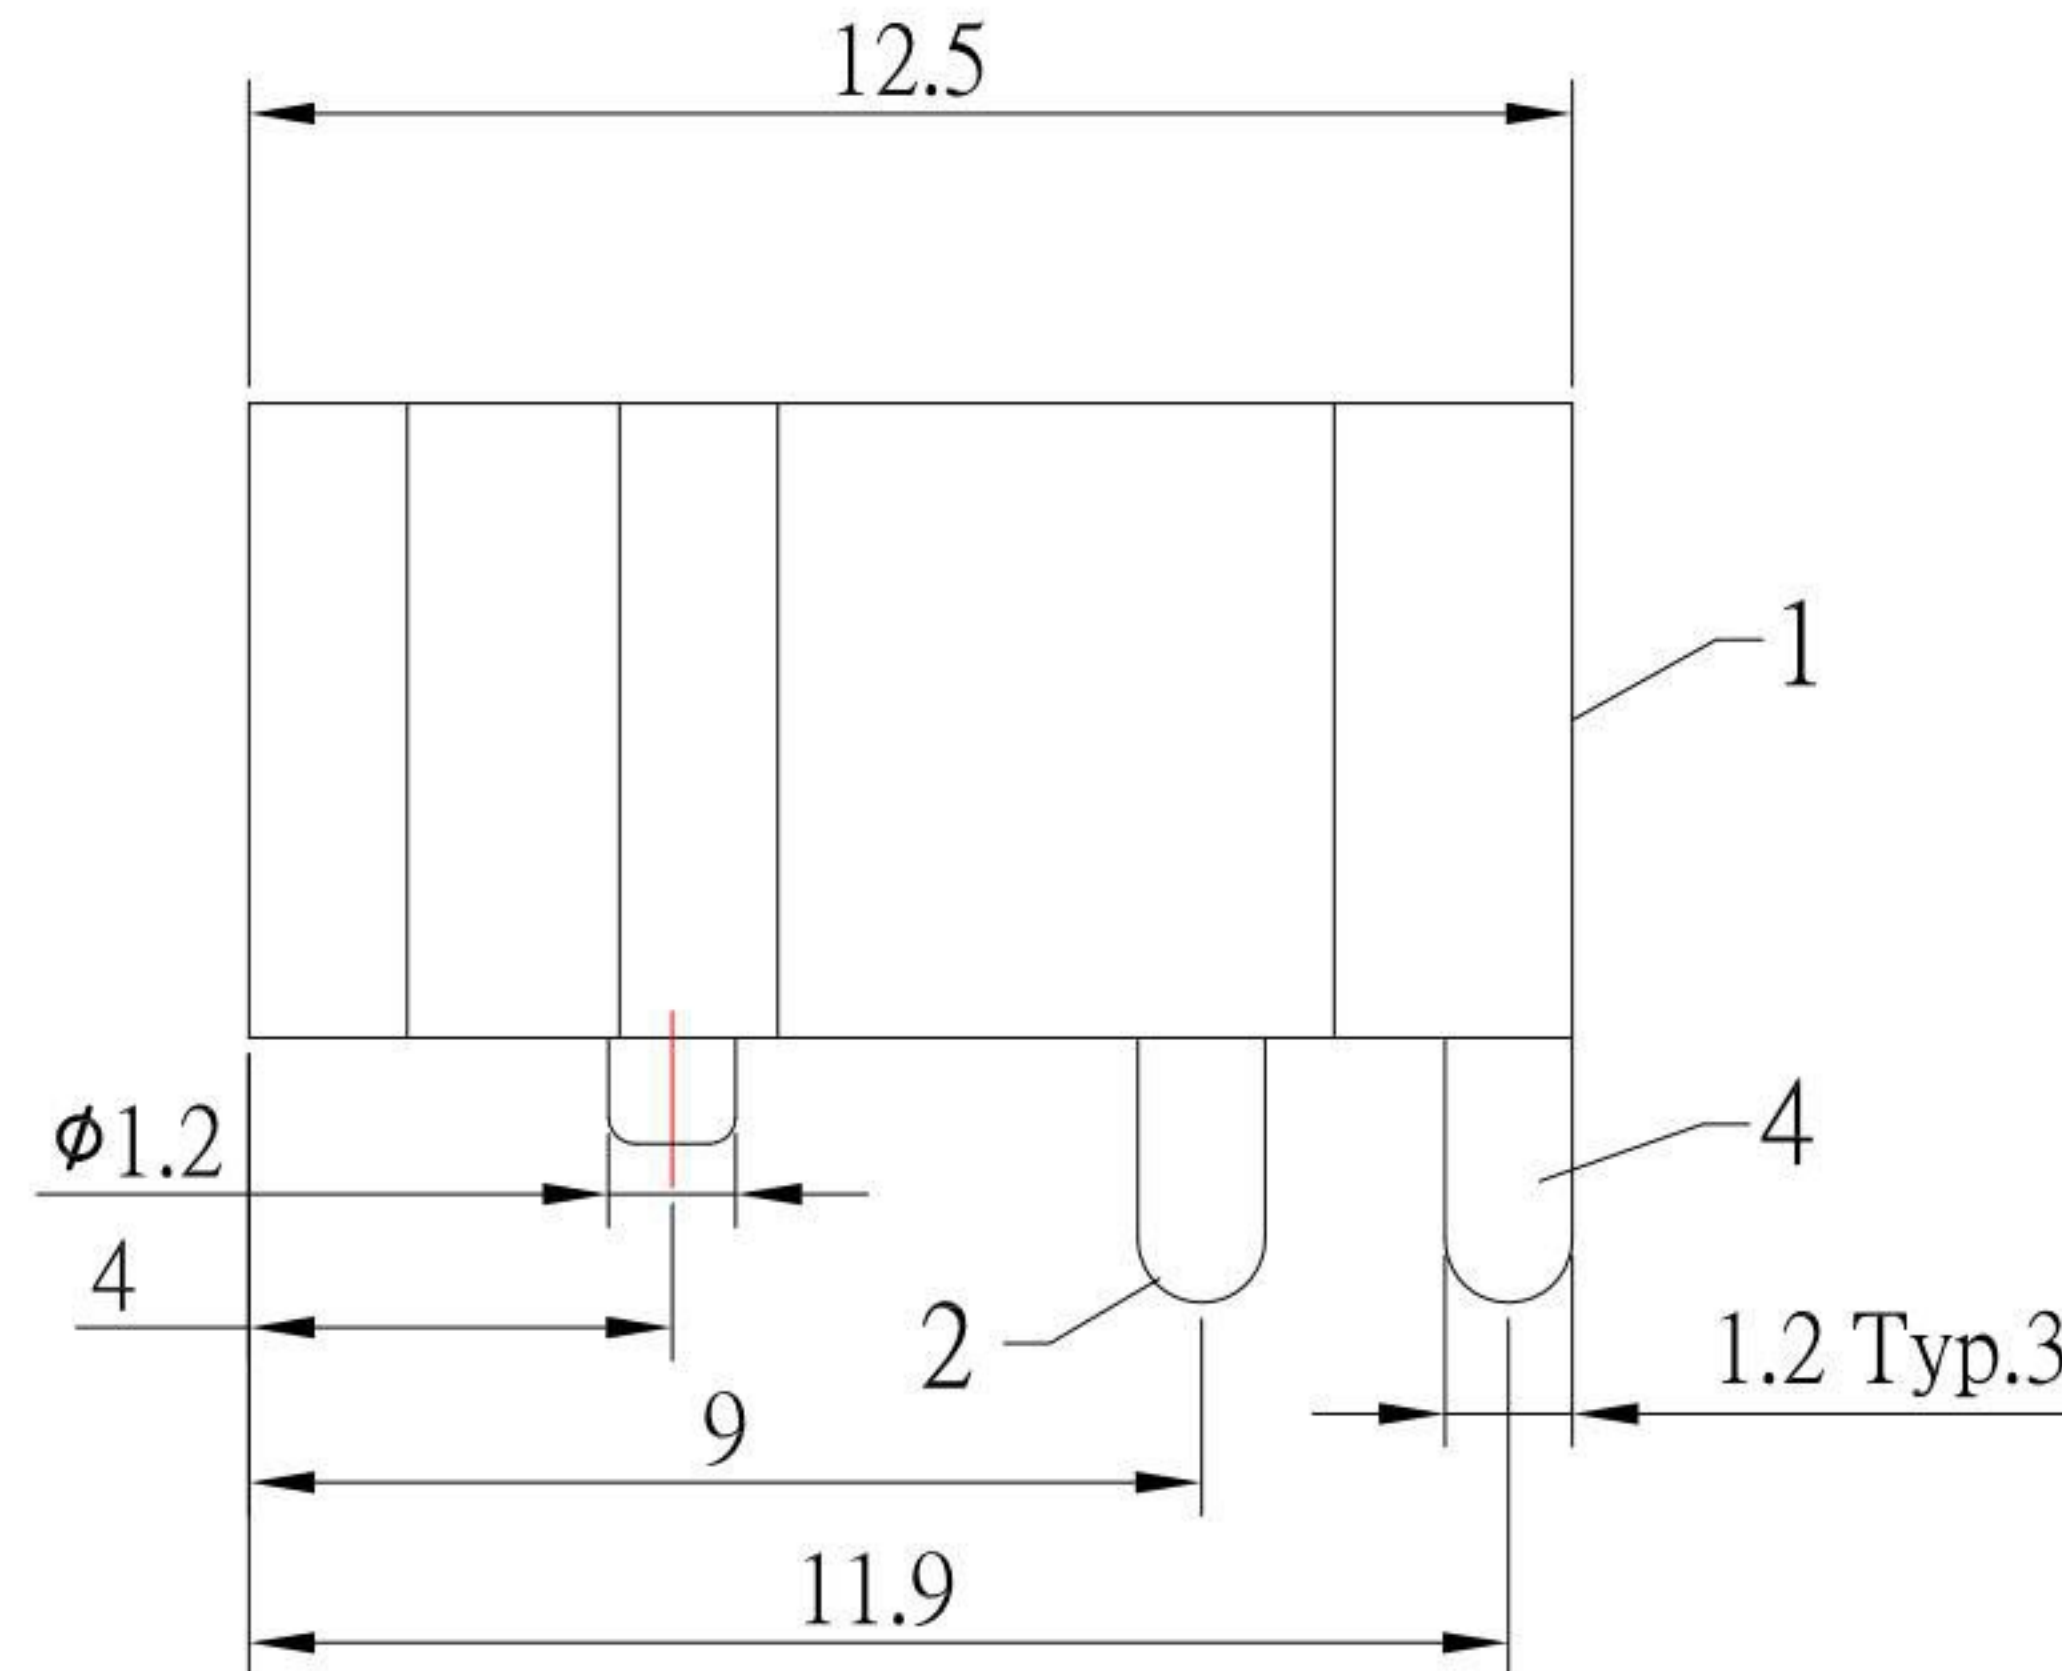


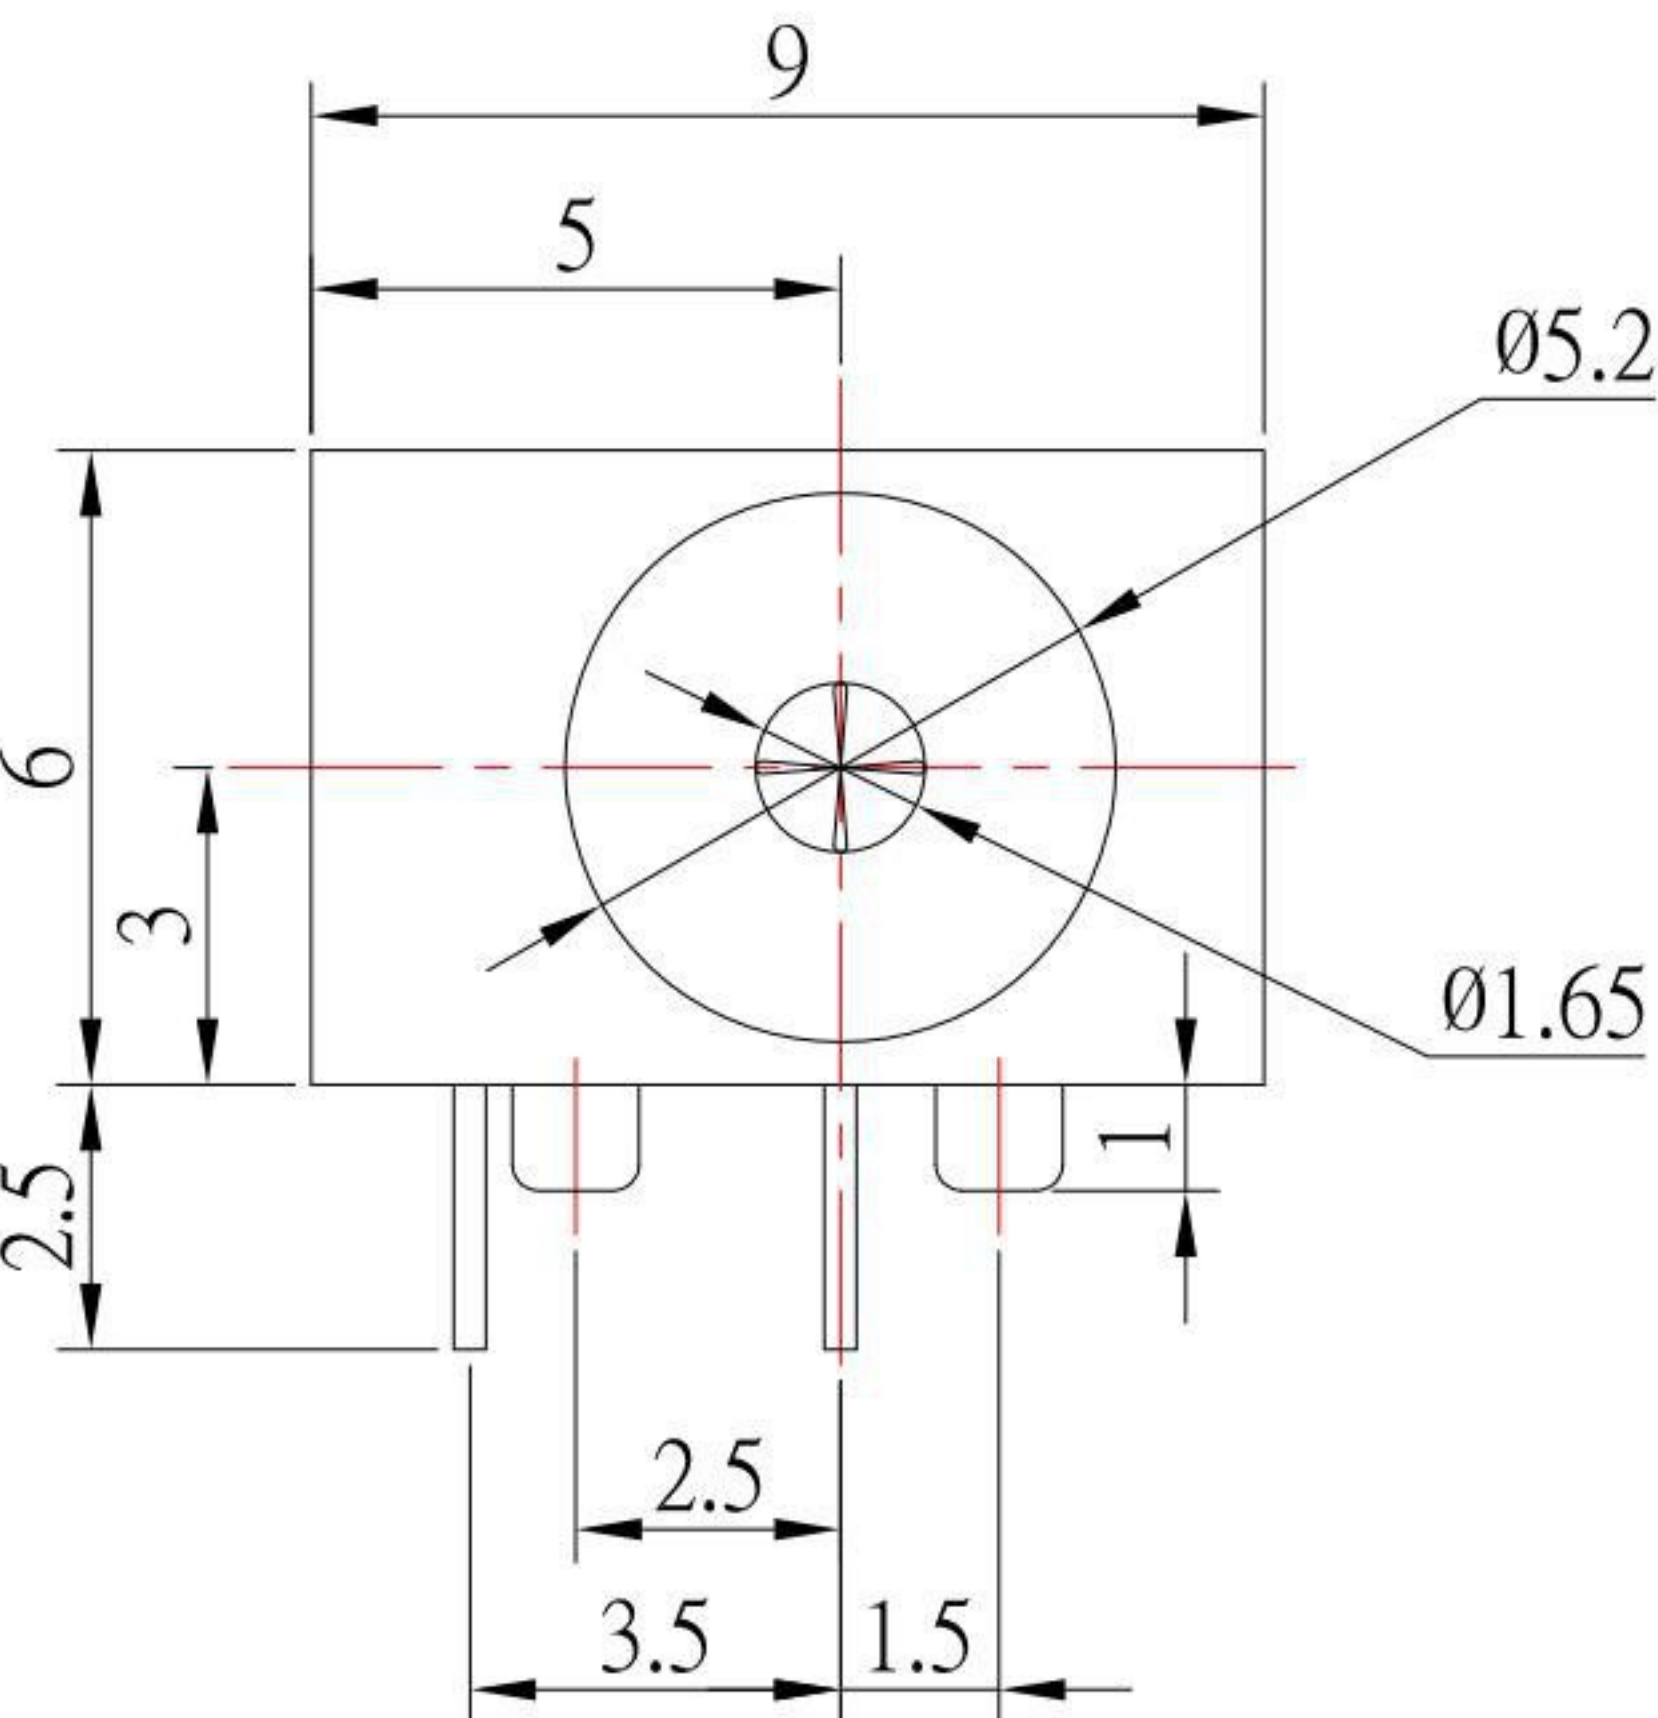

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

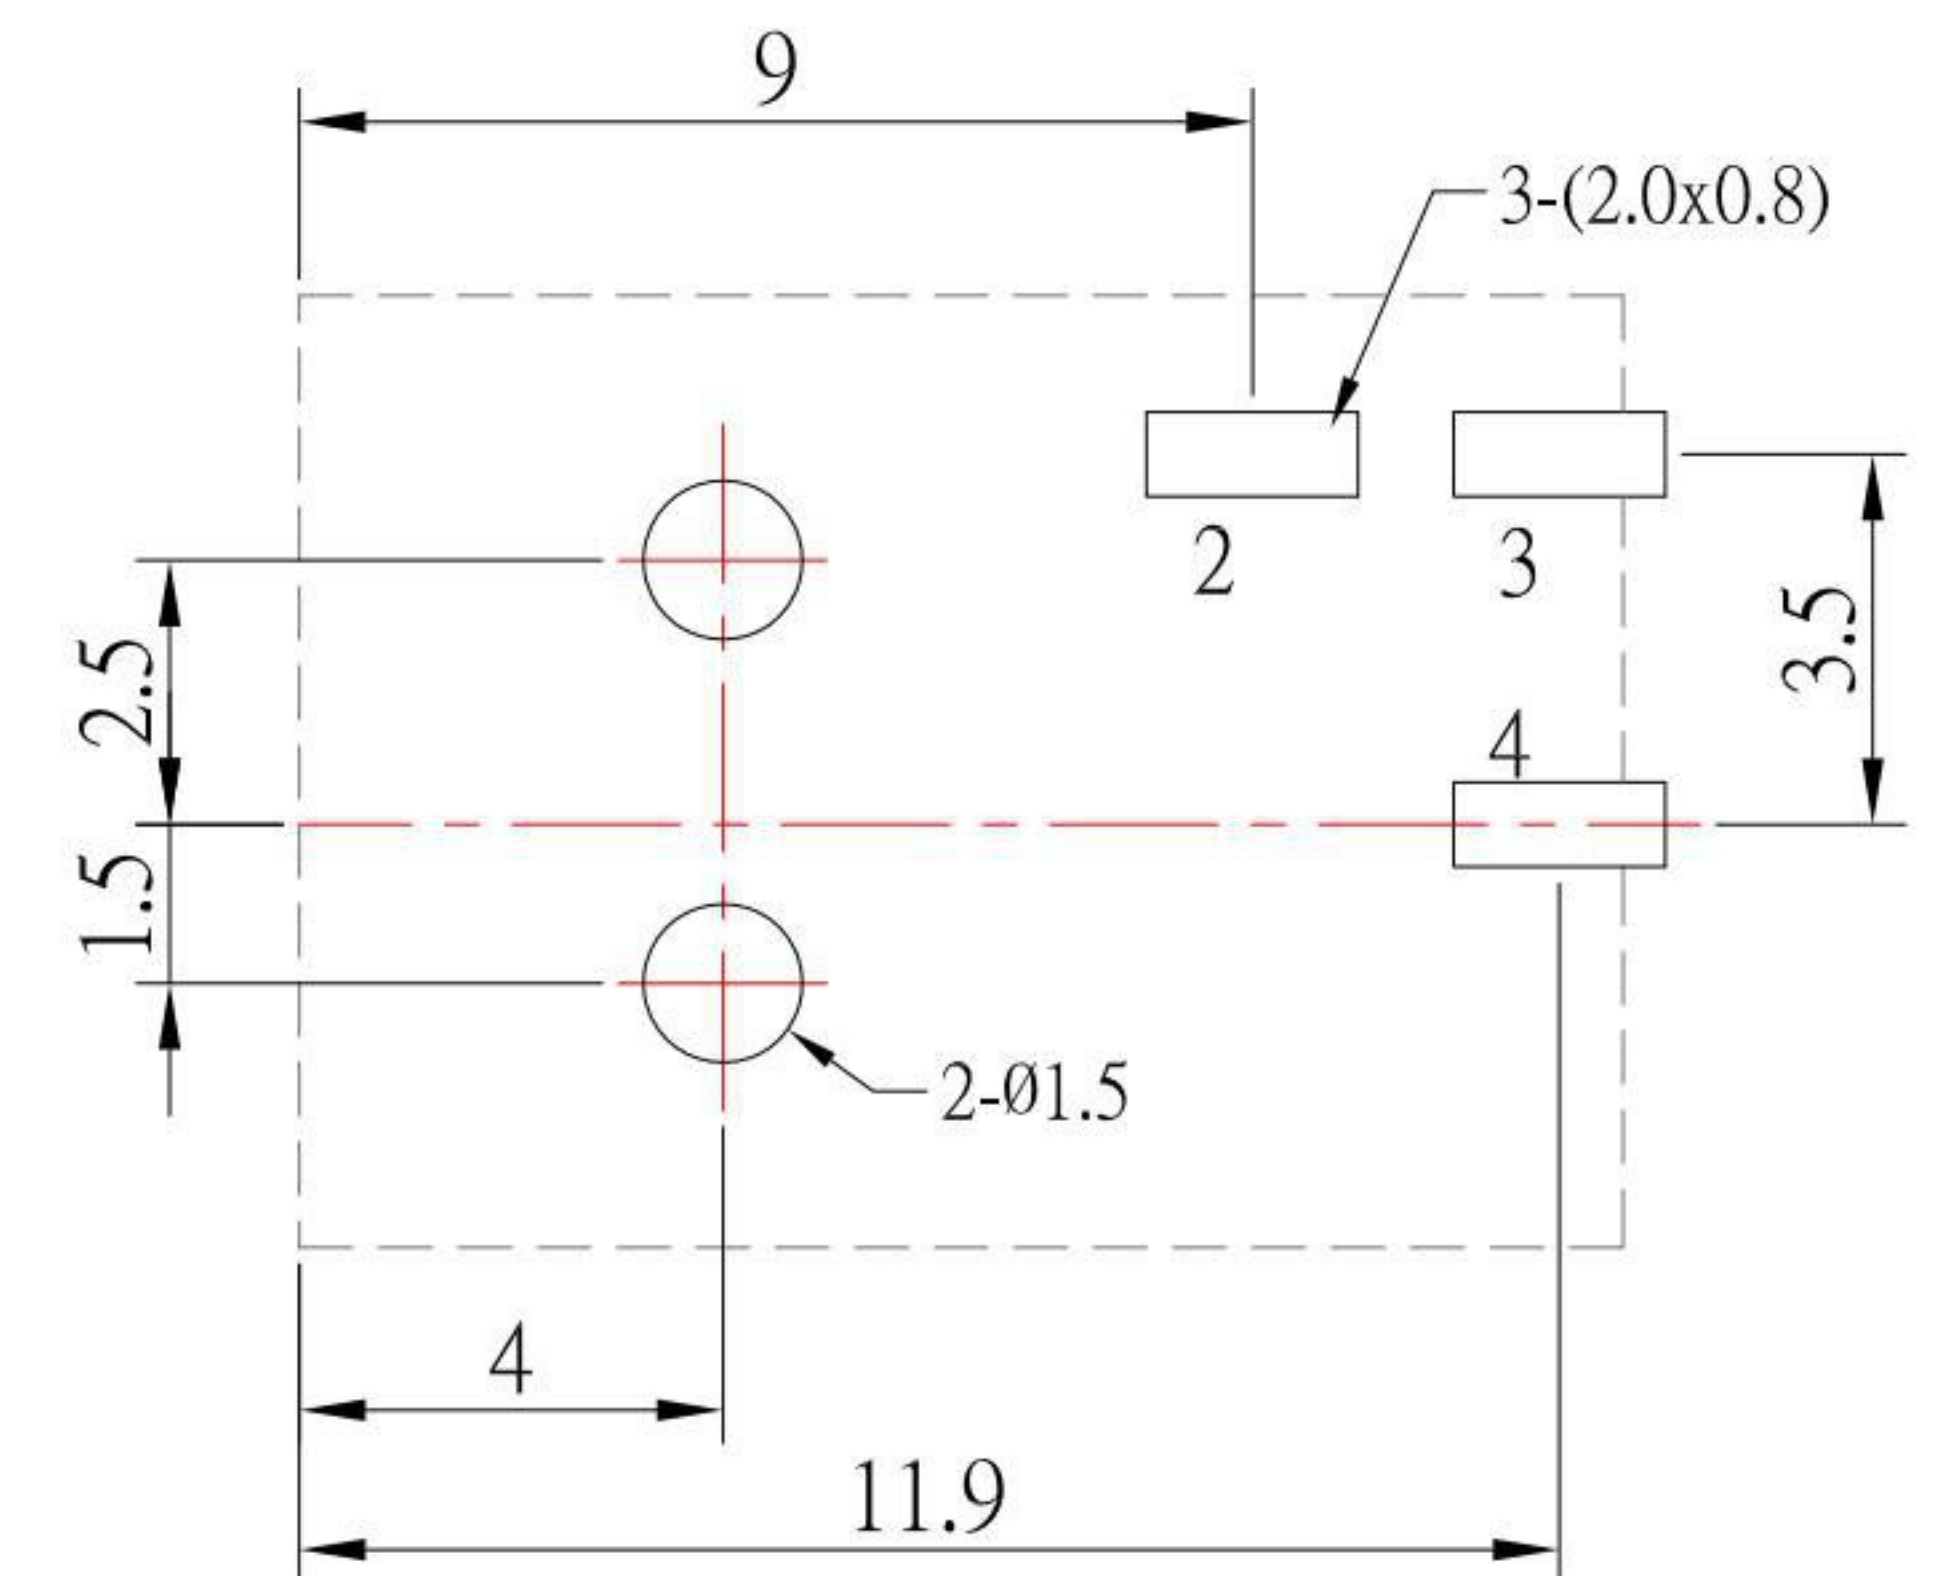

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-15N
- 6.life test : 5,000 cycles ◦

MODEL NO.	DC-026-1.65-S125
SCHEMATIC	
CENTER PIN	Ø1.65 mm

4	PIN	1	Phosphor Bronze	Ag-Plating
3	SPRING	1	Phosphor Bronze	Ag-Plating
2	CURVE PIECE	1	Brass	Ag-Plating
1	HOUSING	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互联零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Frank Wu	04/09/12			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	04/09/12			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-026-1.65-S125
Tony Kao	04/09/12	1 : 1		
SHEET NO.	1 of 1	PART NO.	DC-026-1.65-S125	SIZE A4
				VER A