


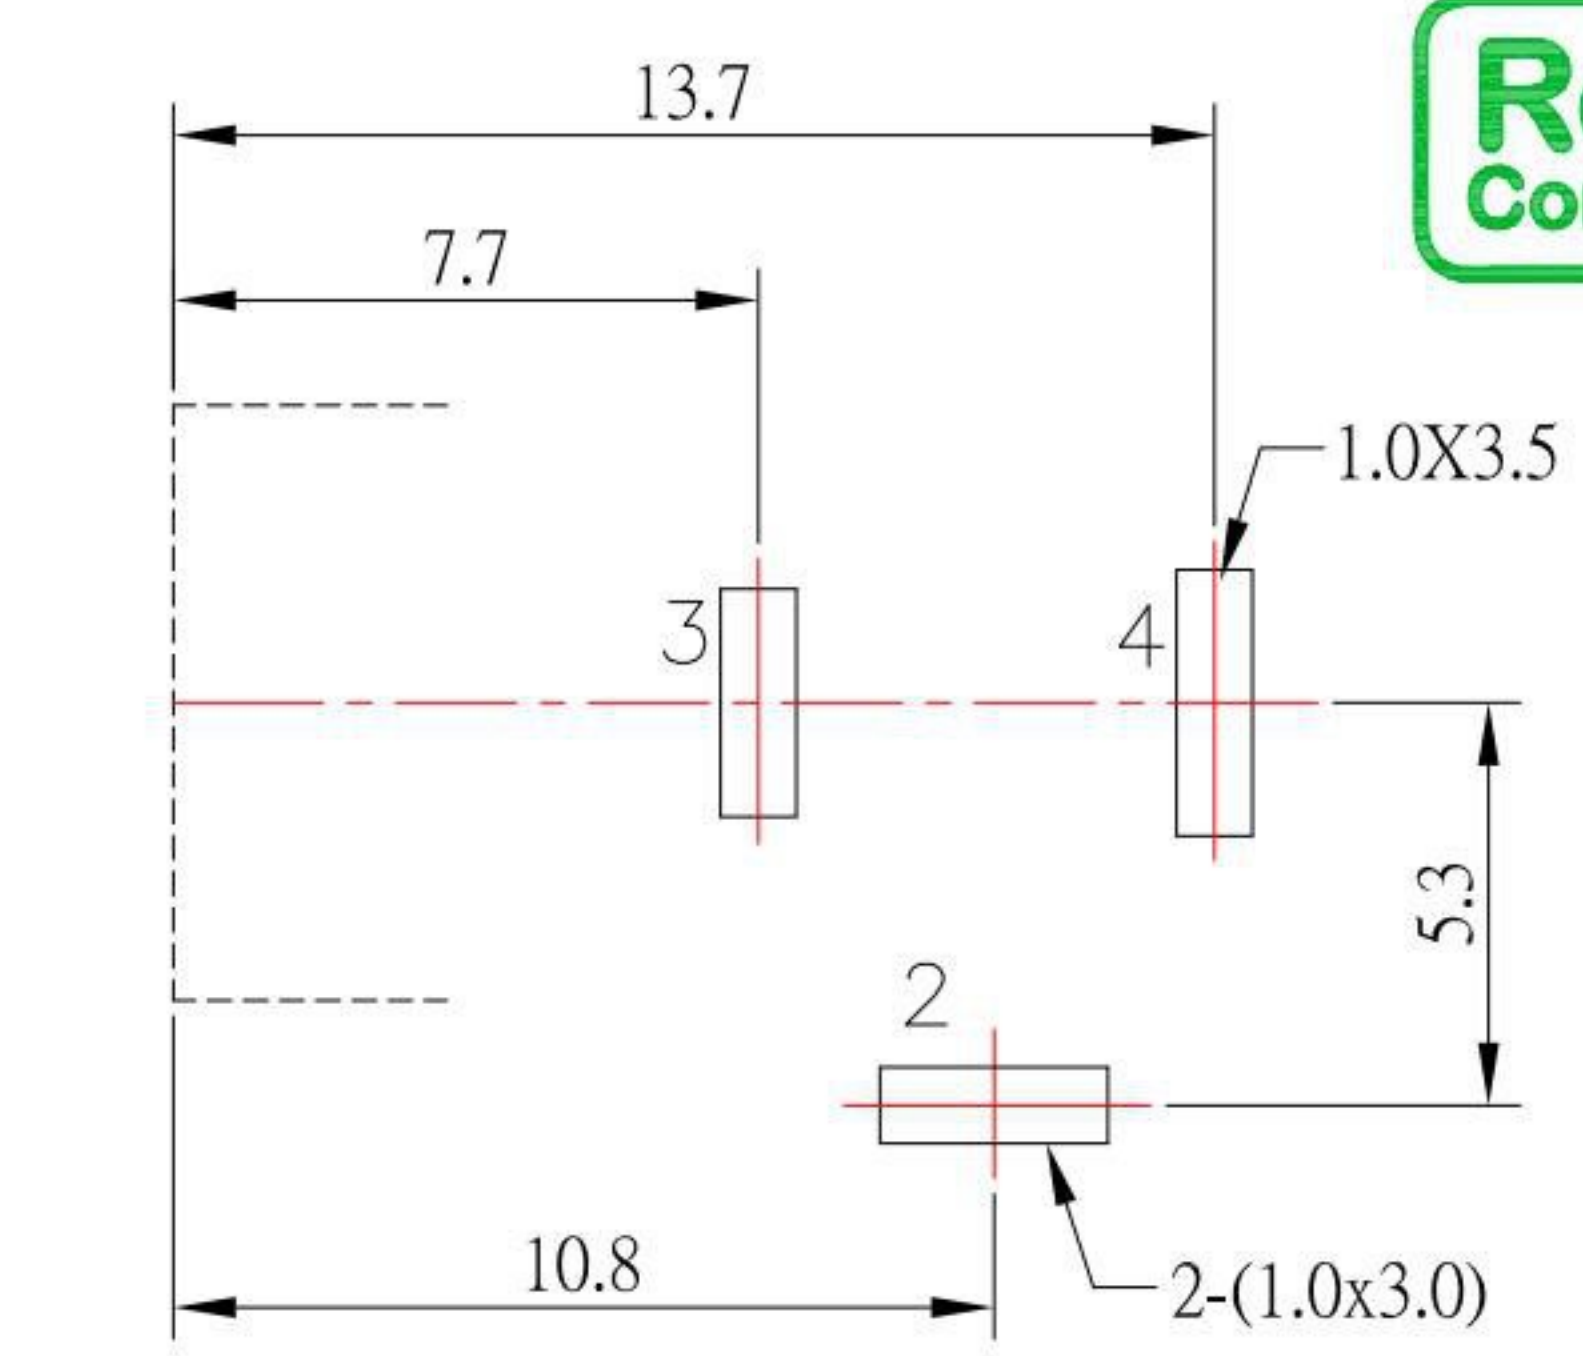
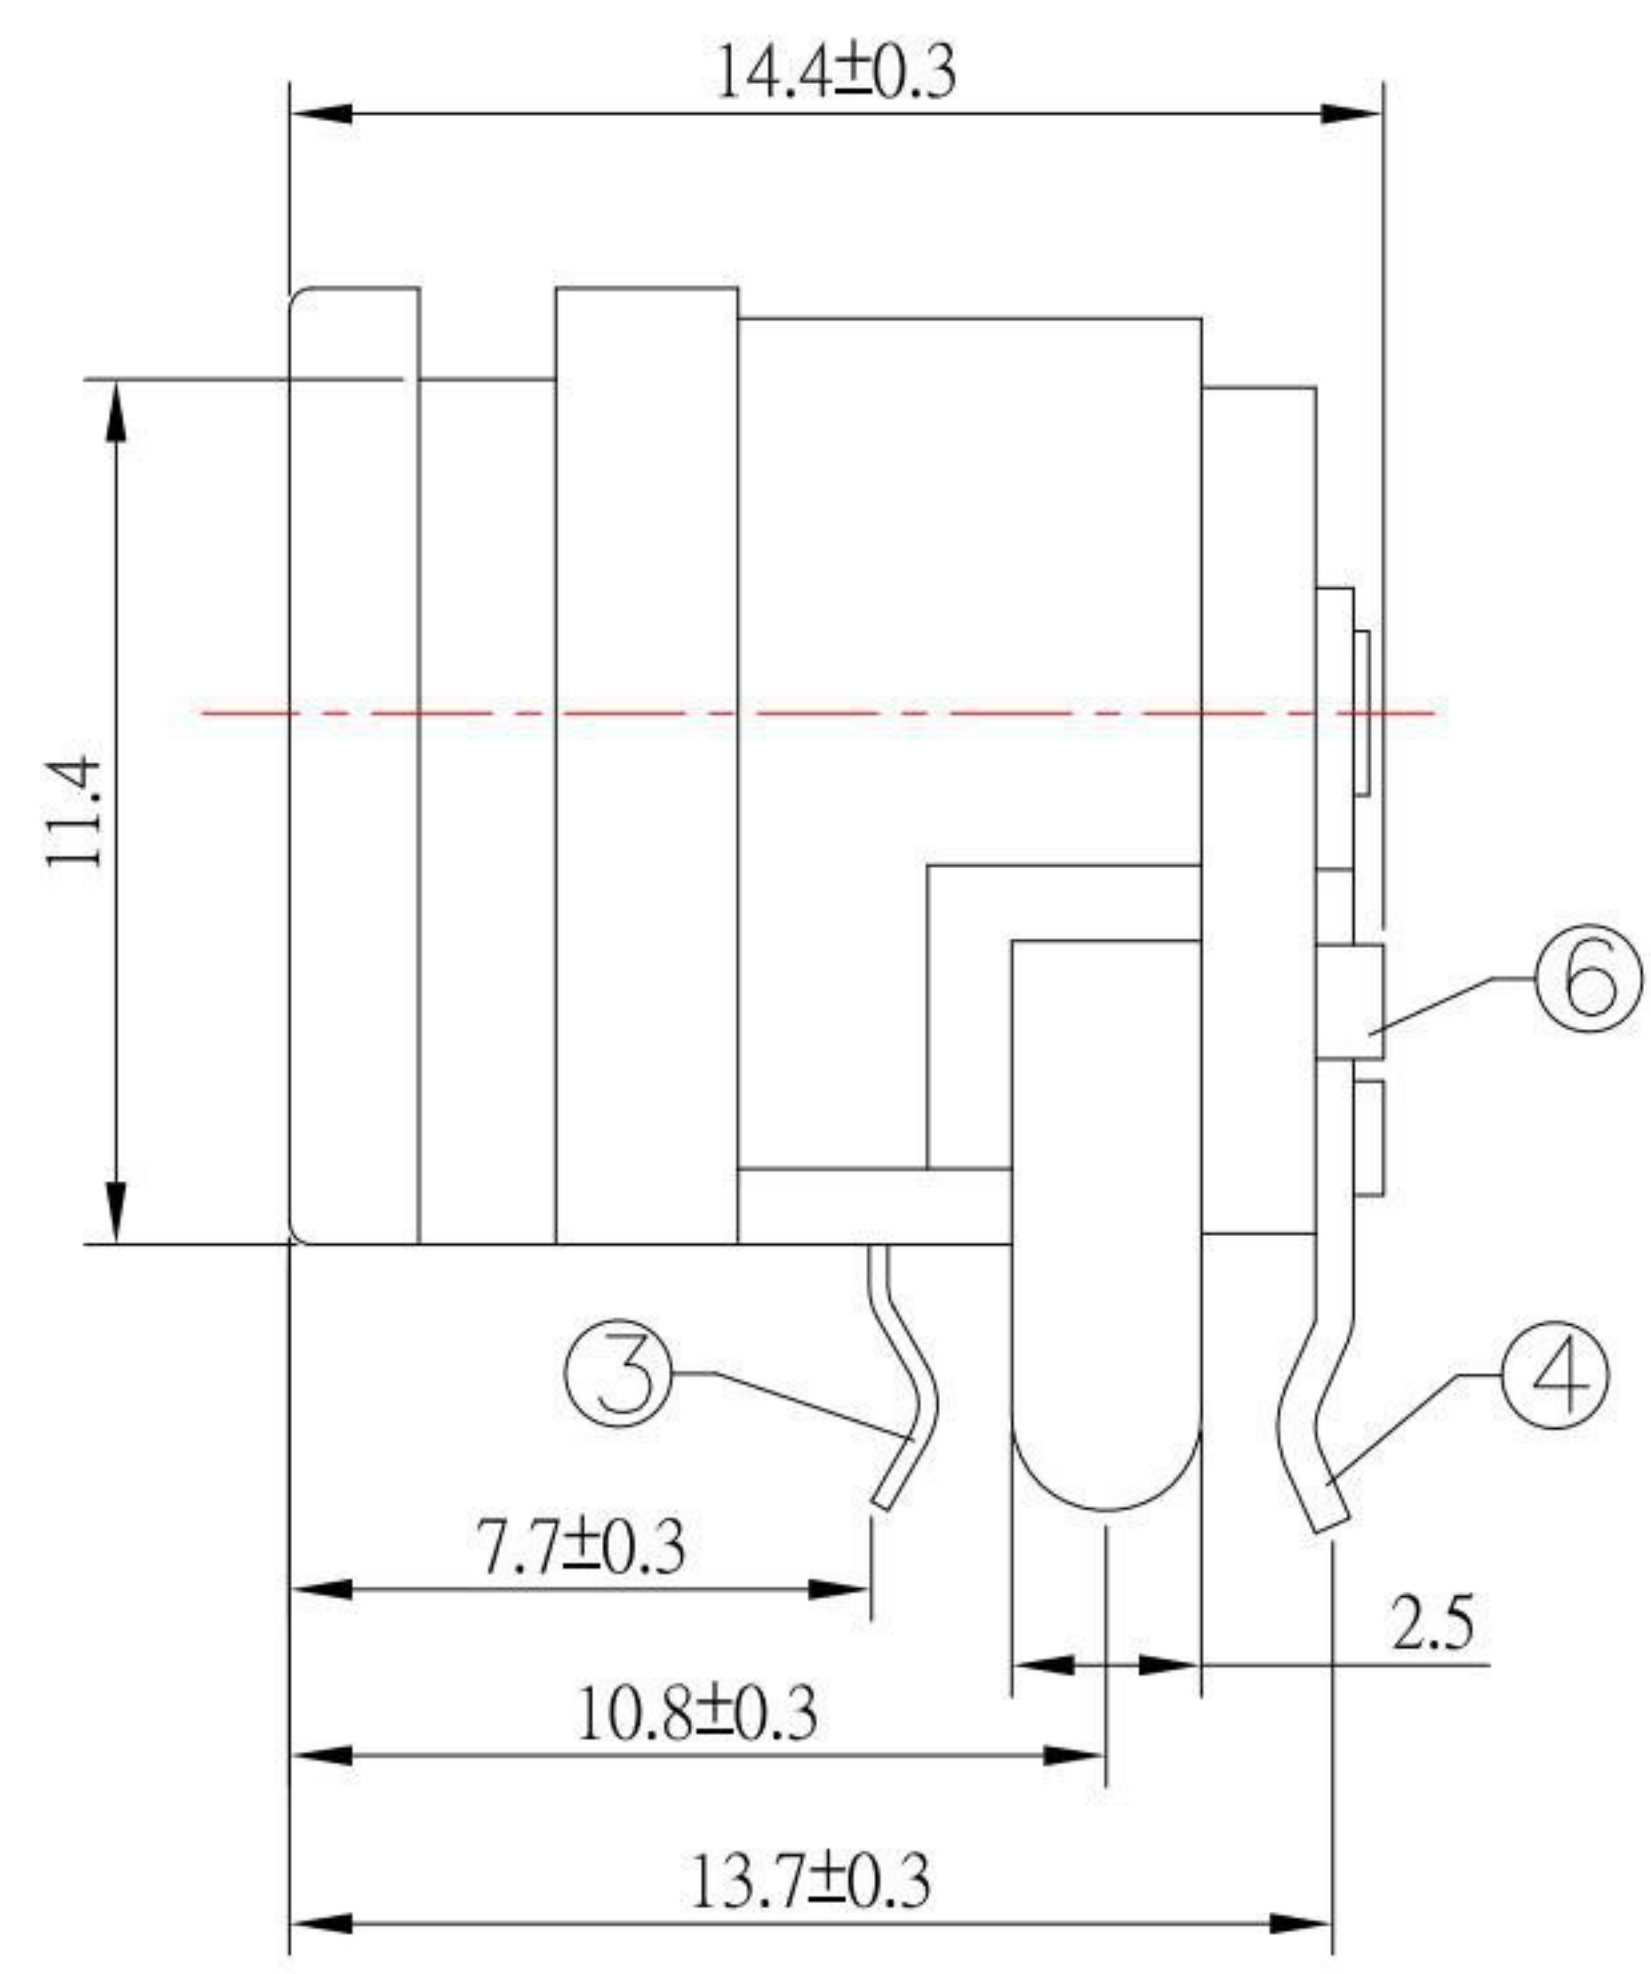


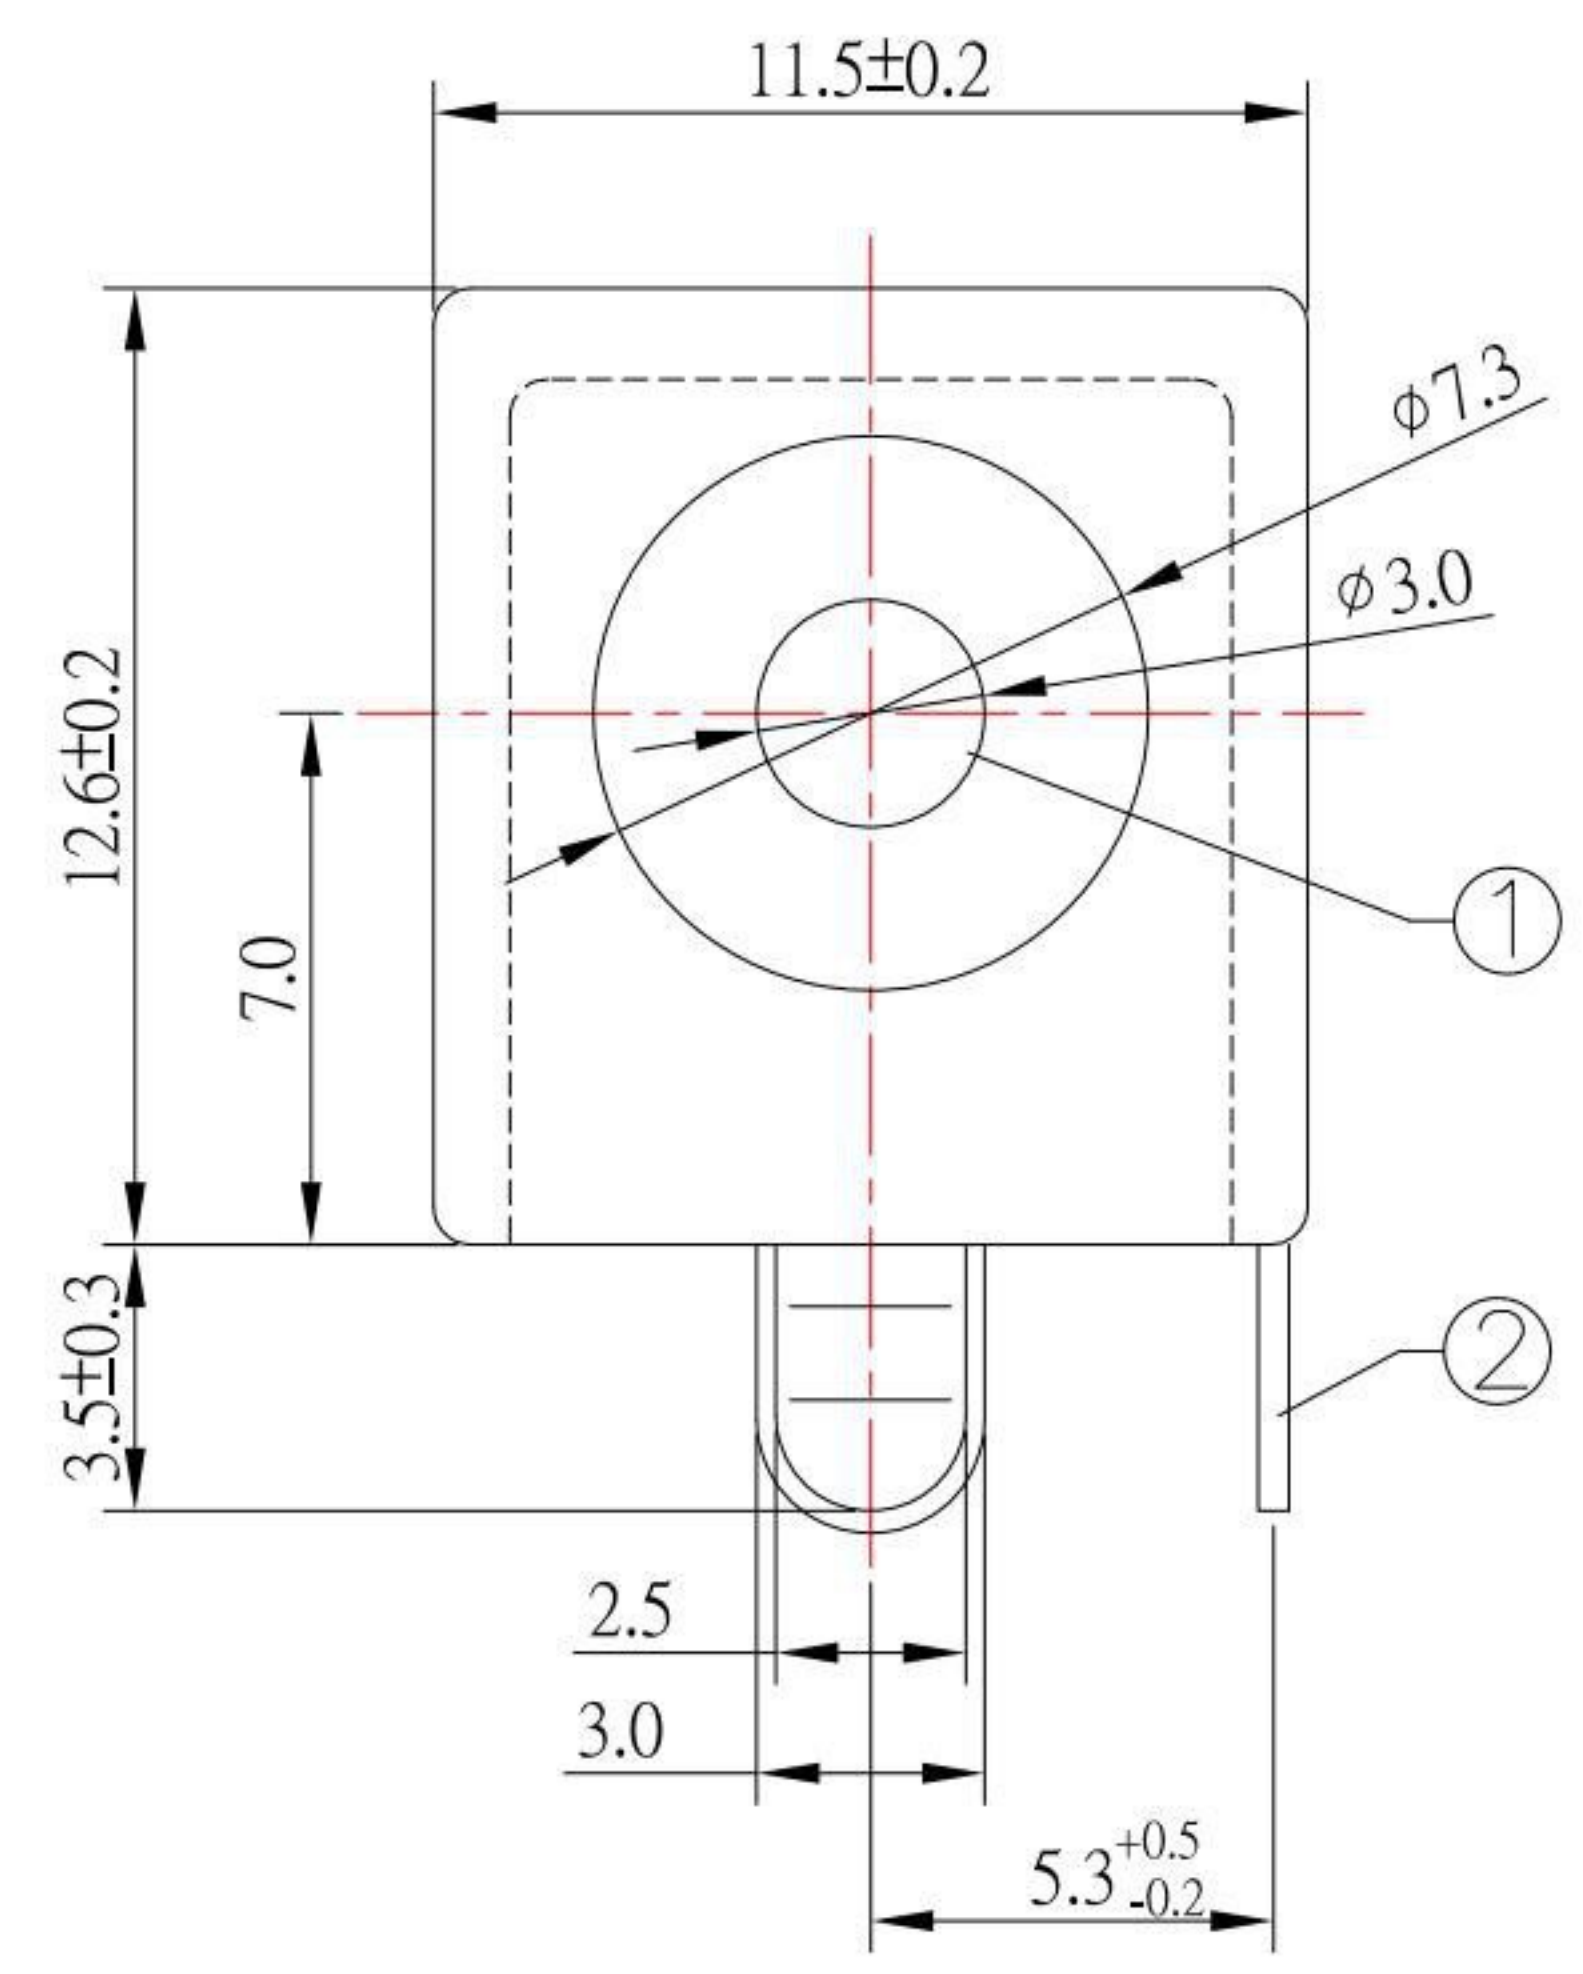

P.C.B LAYOUT MOUNTING PATTERN
(TOP-VIEW)

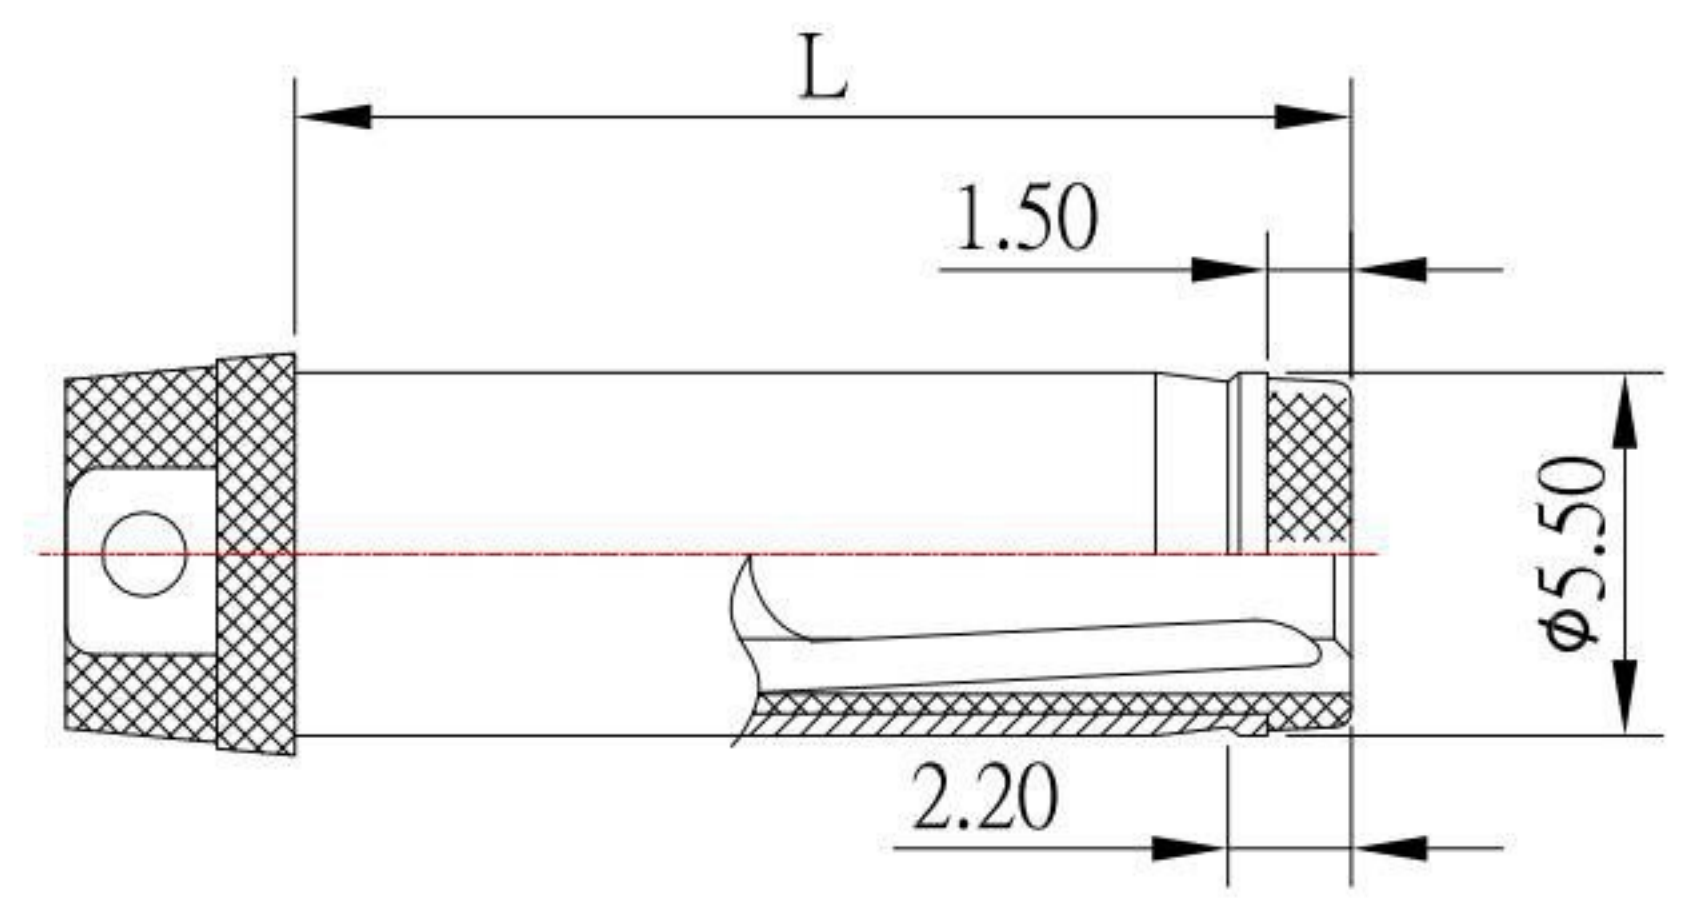

RECOMMENDED PLUG

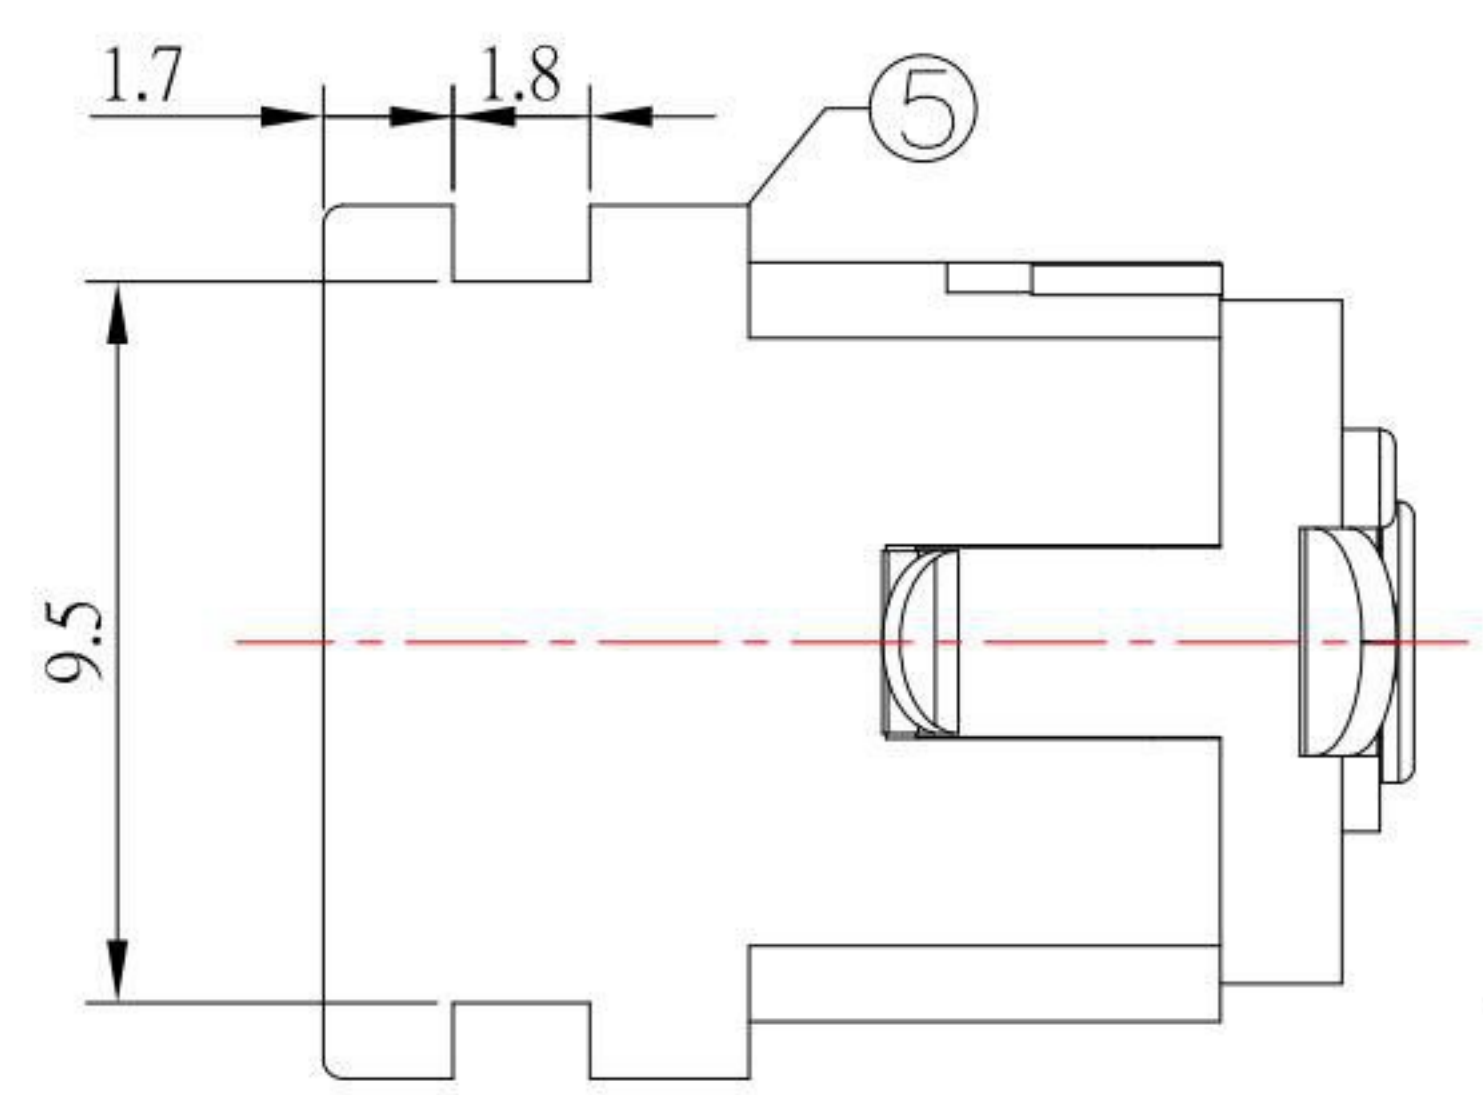

MODEL NO.	DC-040AH-2-3.0
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V, 4.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

6	COVER	1	PA9T	
5	HOUSING	1	PA9T	
4	FLAT PIECE	1	BRASS	Sn-Plating
3	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	PIN	1	BRASS	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD
SWITCH CONNECTOR
全球 互聯零組件 制造企业

科斯达电子科技有限公司
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	JACK
Jack Lu	05/31/21	FINISH		MODLE	DC JACK(高溫料)
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-040AH-2-3.0-S124
Jacky Chen	05/31/21	SHEET NO.	1 of 1	PART NO.	DC-040AH-2-3.0-S124
APPROVED BY:	DATE				
Tony Kao	05/31/21				

1	更新尺寸公差	Jack	053121
ITEM NO.	DESCRIPTION	DRAWN	DATE