

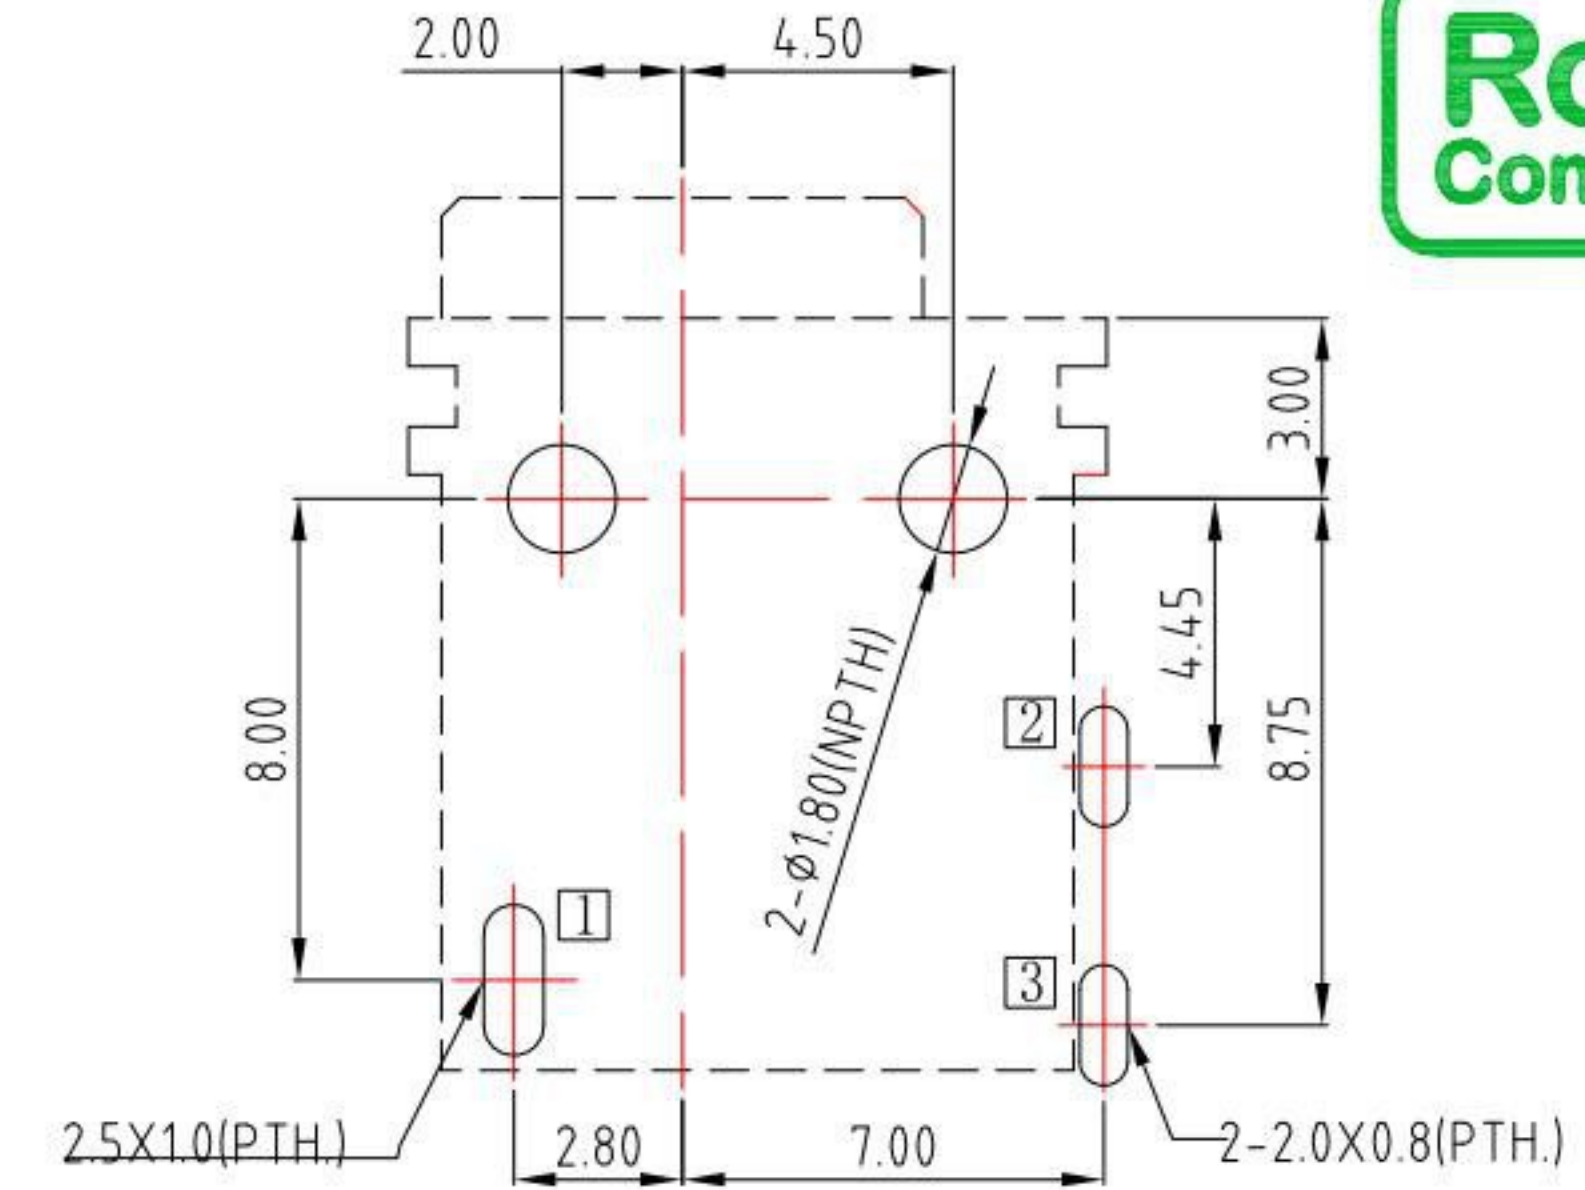
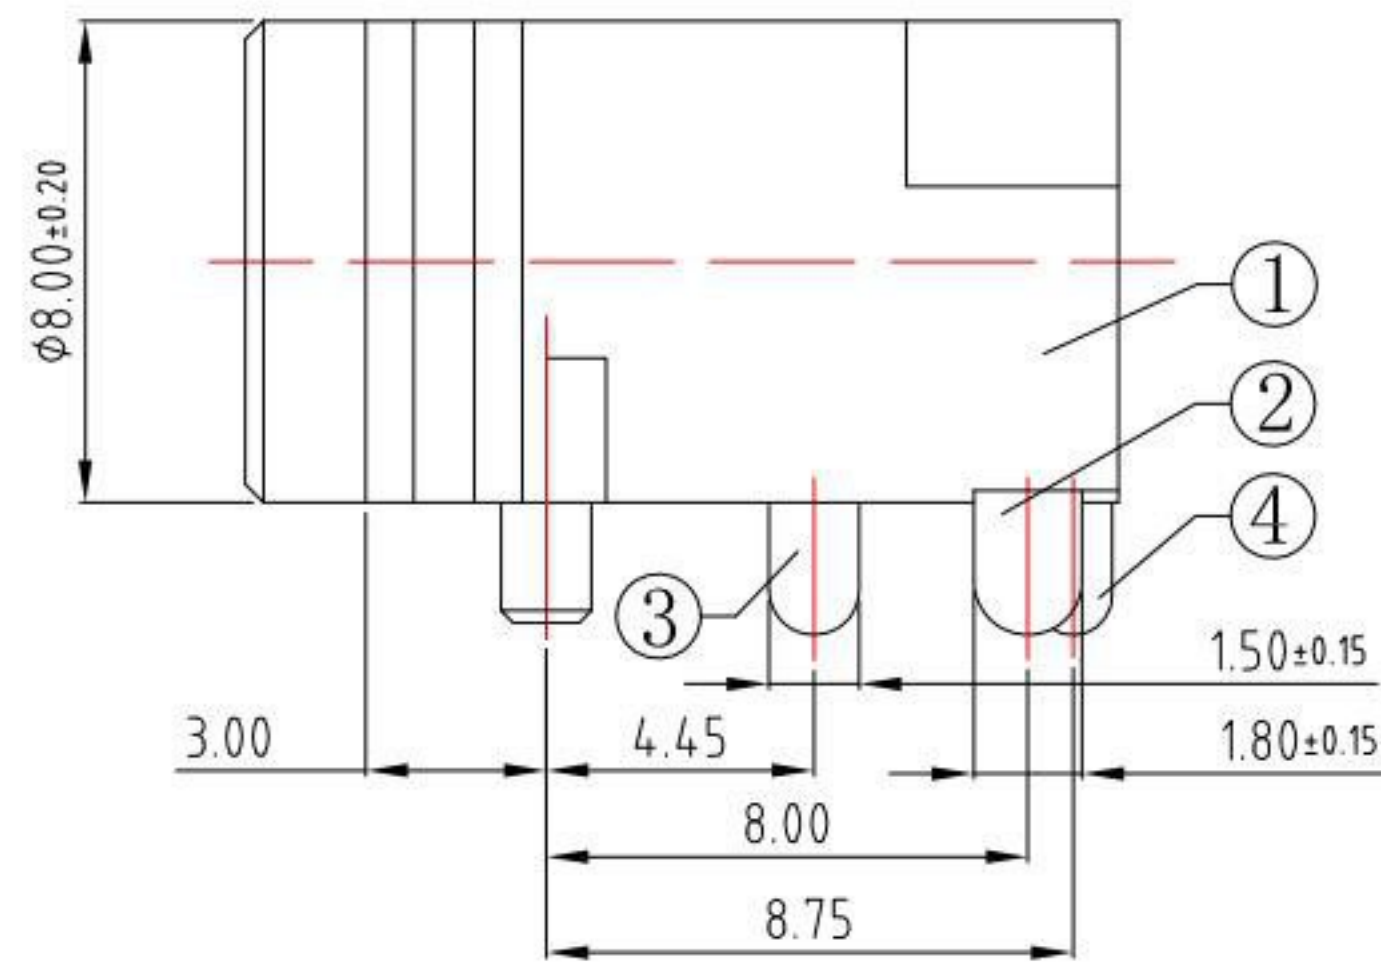
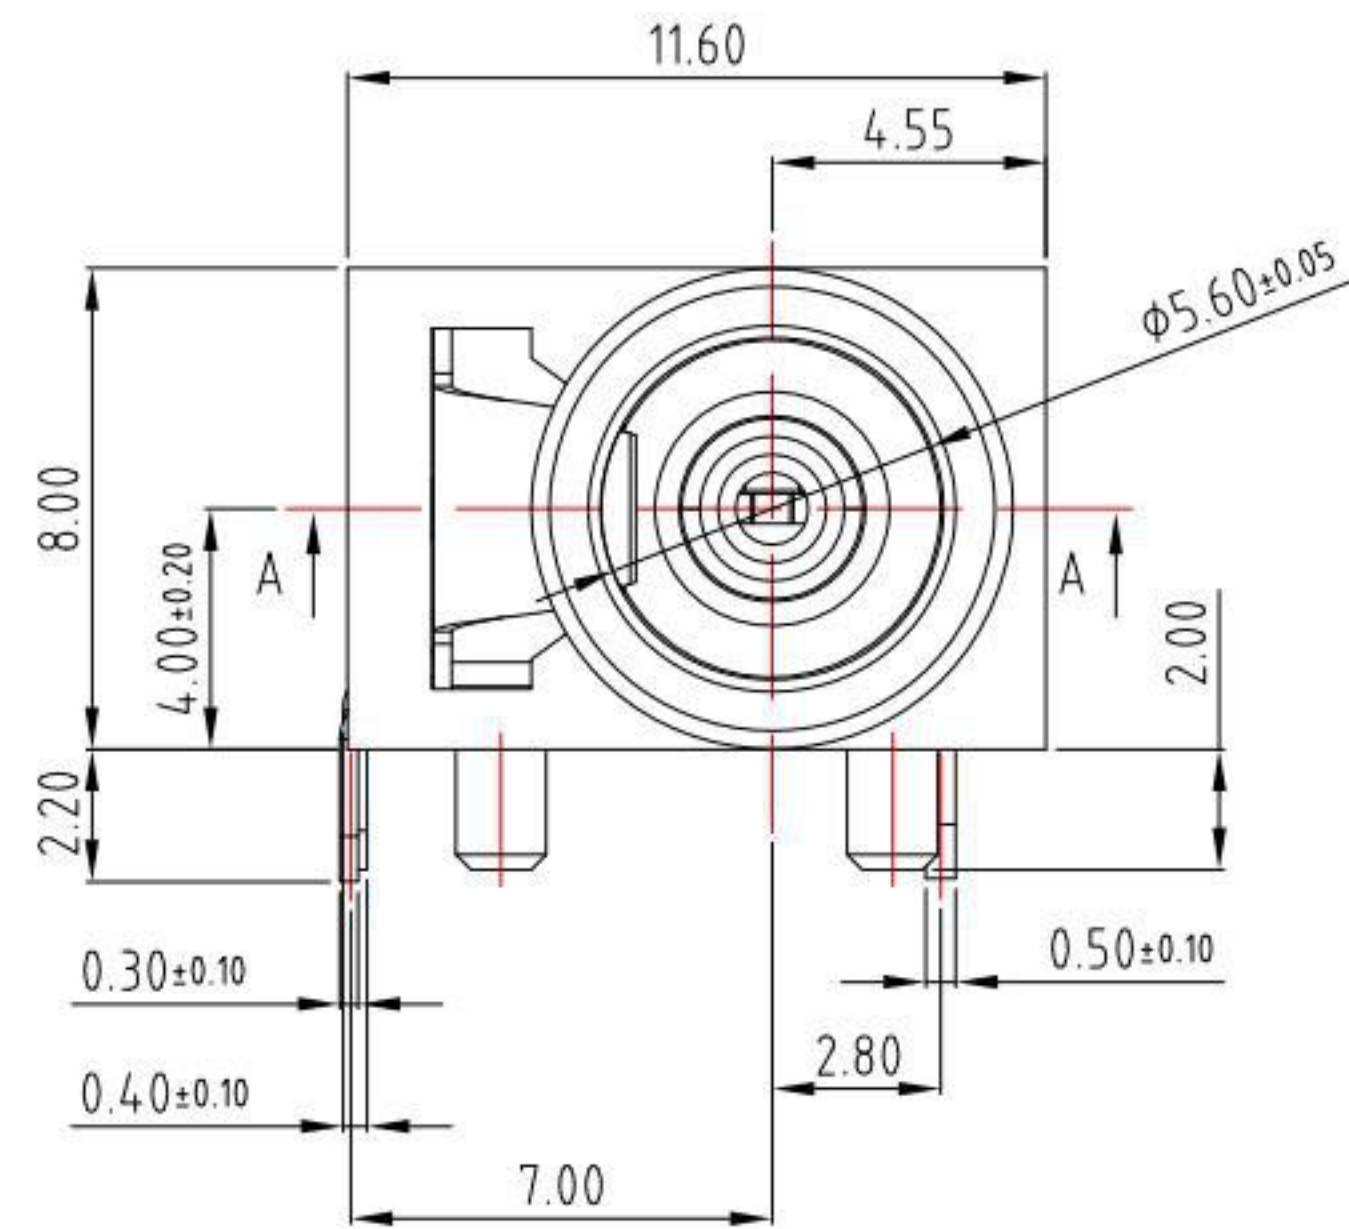
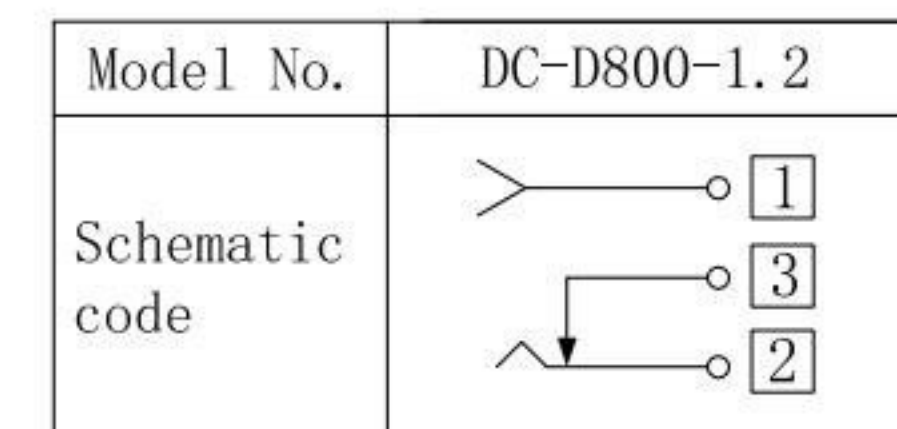


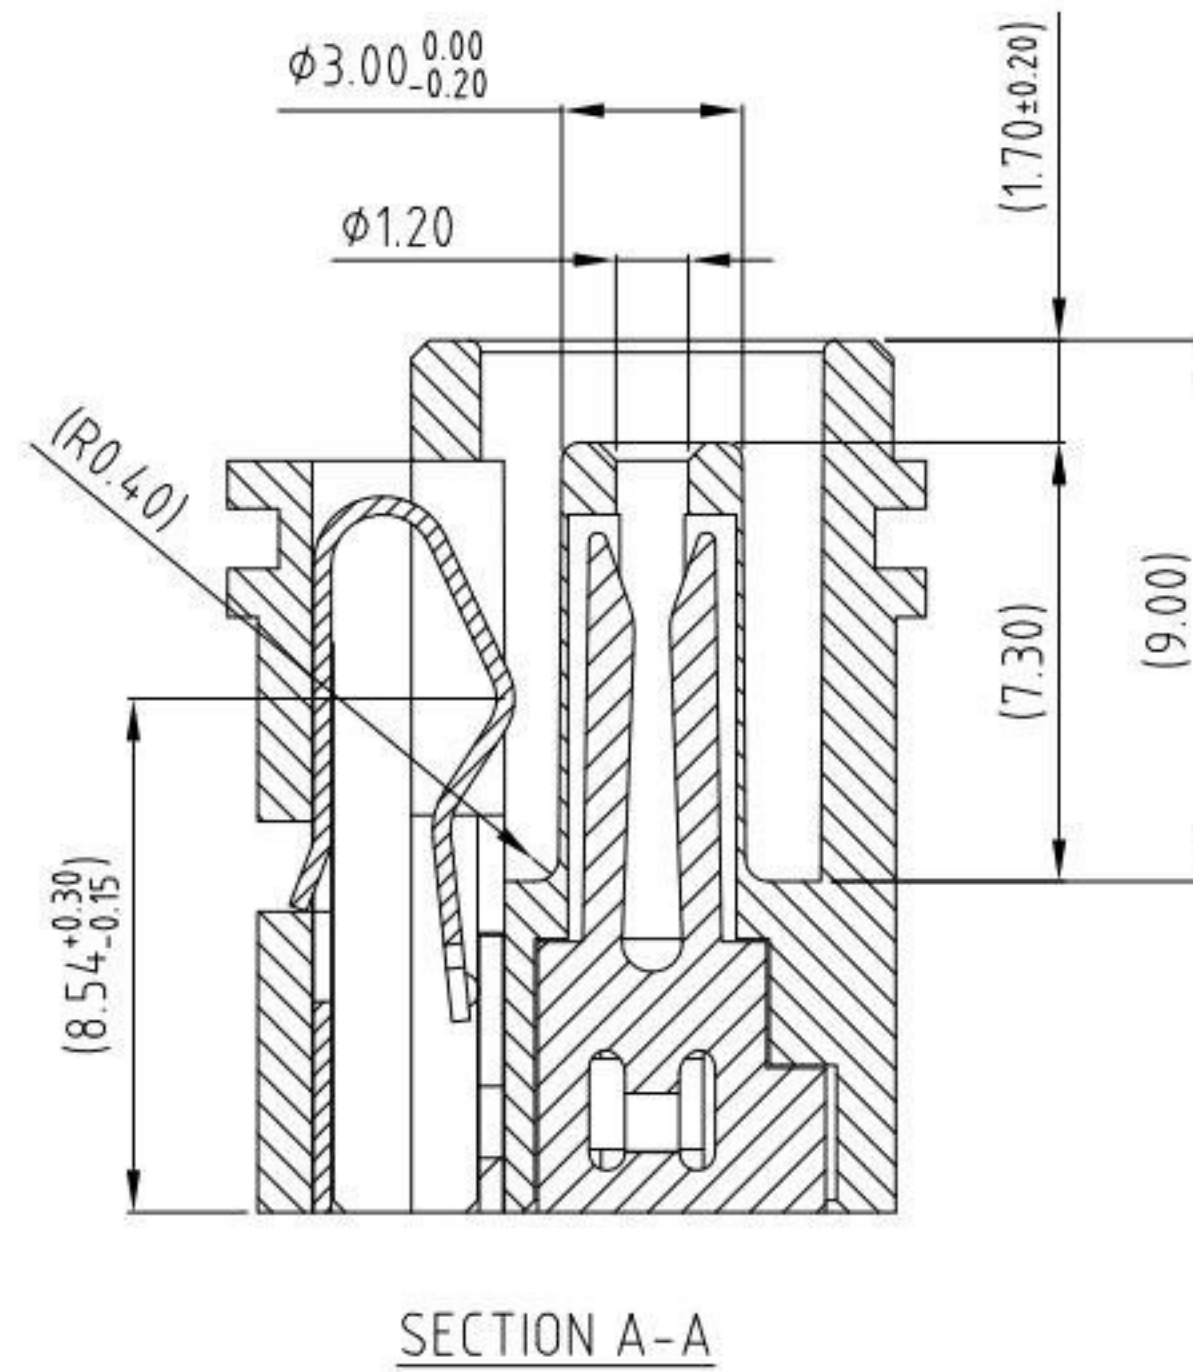

P.C.B LAYOUT
TOP VIEW

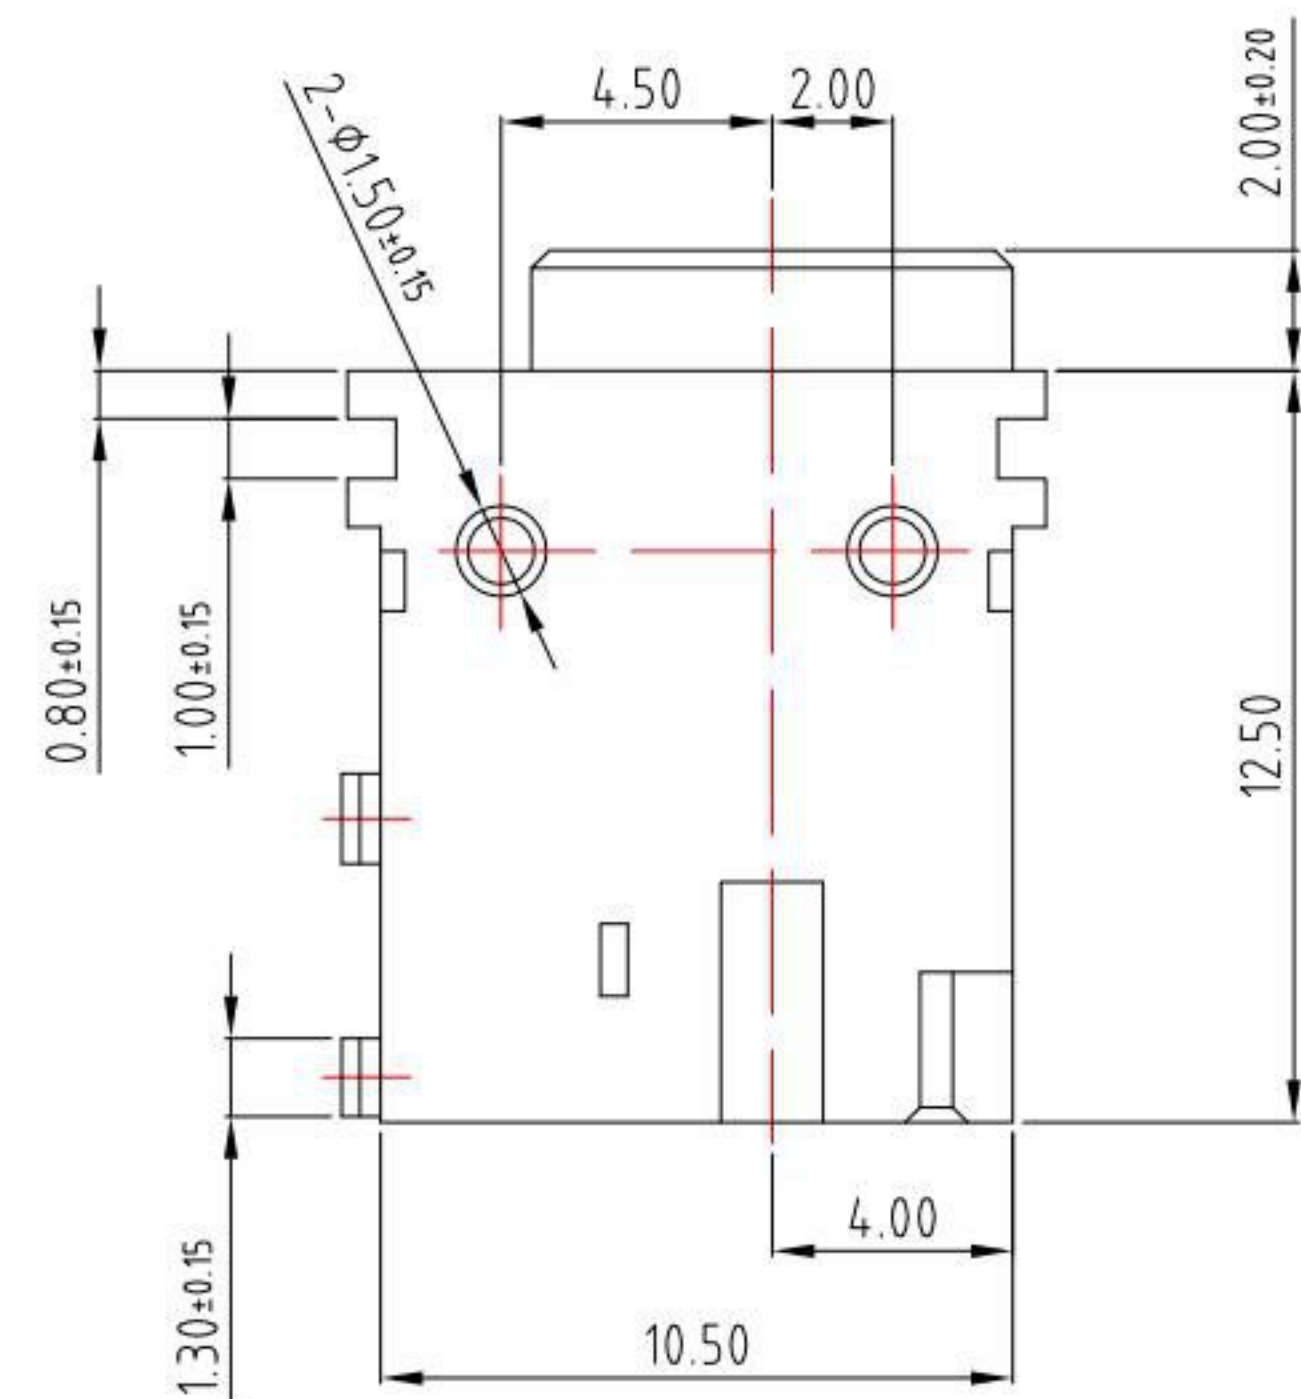

Circuit Diagram □:Terminal No.

SPECIFICATION


- 1.Rating : DC 20V , 5.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

④	Shunt terminal	③	1	C2680	Tin or Silver plating
③	Tip spring	②	1	C5210	Tin or Silver plating
②	Center pin	①	1	C2680	Tin or Silver plating
①	Housing		1	PA9T or PBT	Black
NO.	DESCRIPTION		Q' TY	MATERIAL	REMARK

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互连零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 11/28/19

CHECKED BY: DATE

Jacky Chen 11/28/19

APPROVED BY: DATE

Tony Kao 11/28/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

DC JACK DIP TYPE

DC-D800-1.2-S214

DC-D800-1.2-S214

SIZE

A4

VER

R