

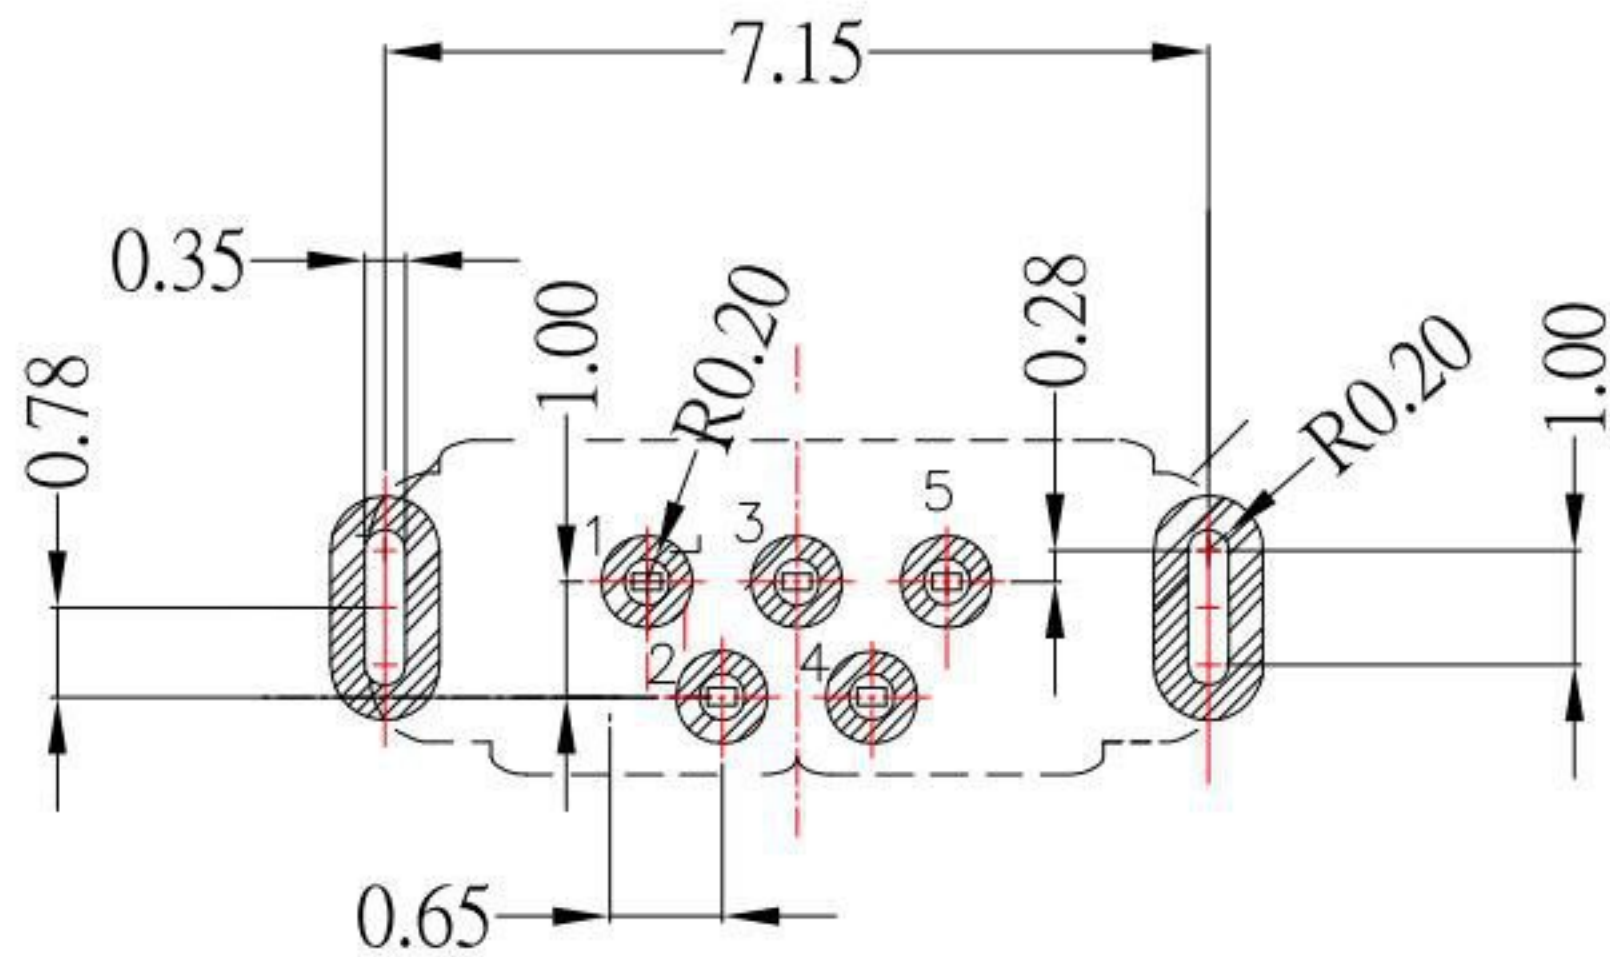
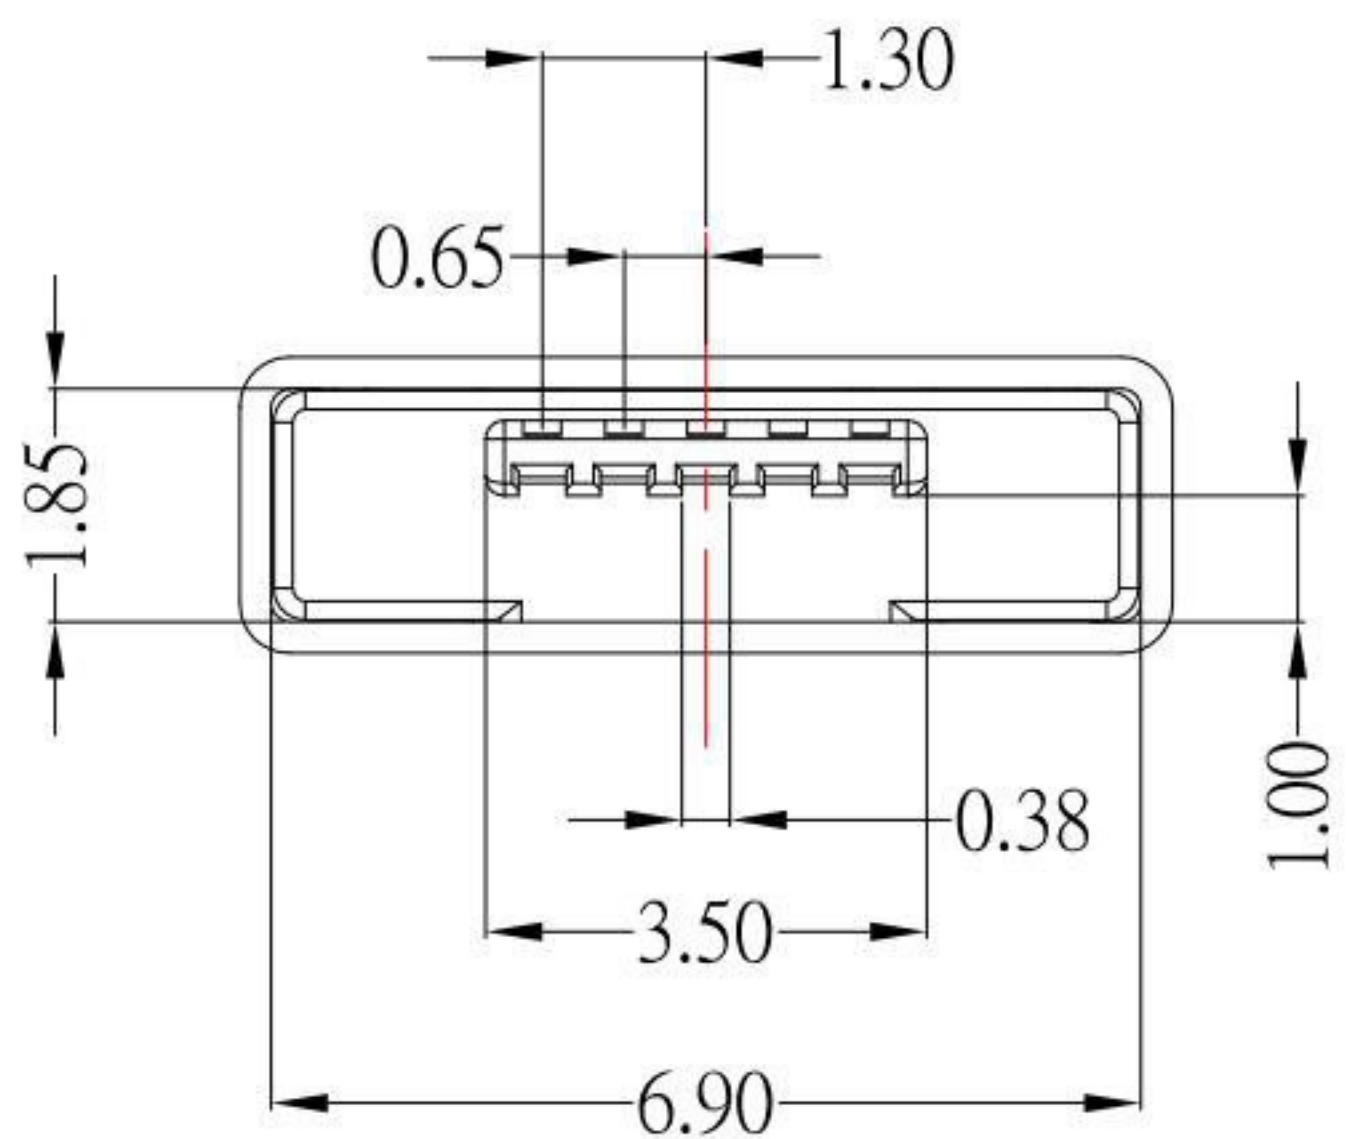


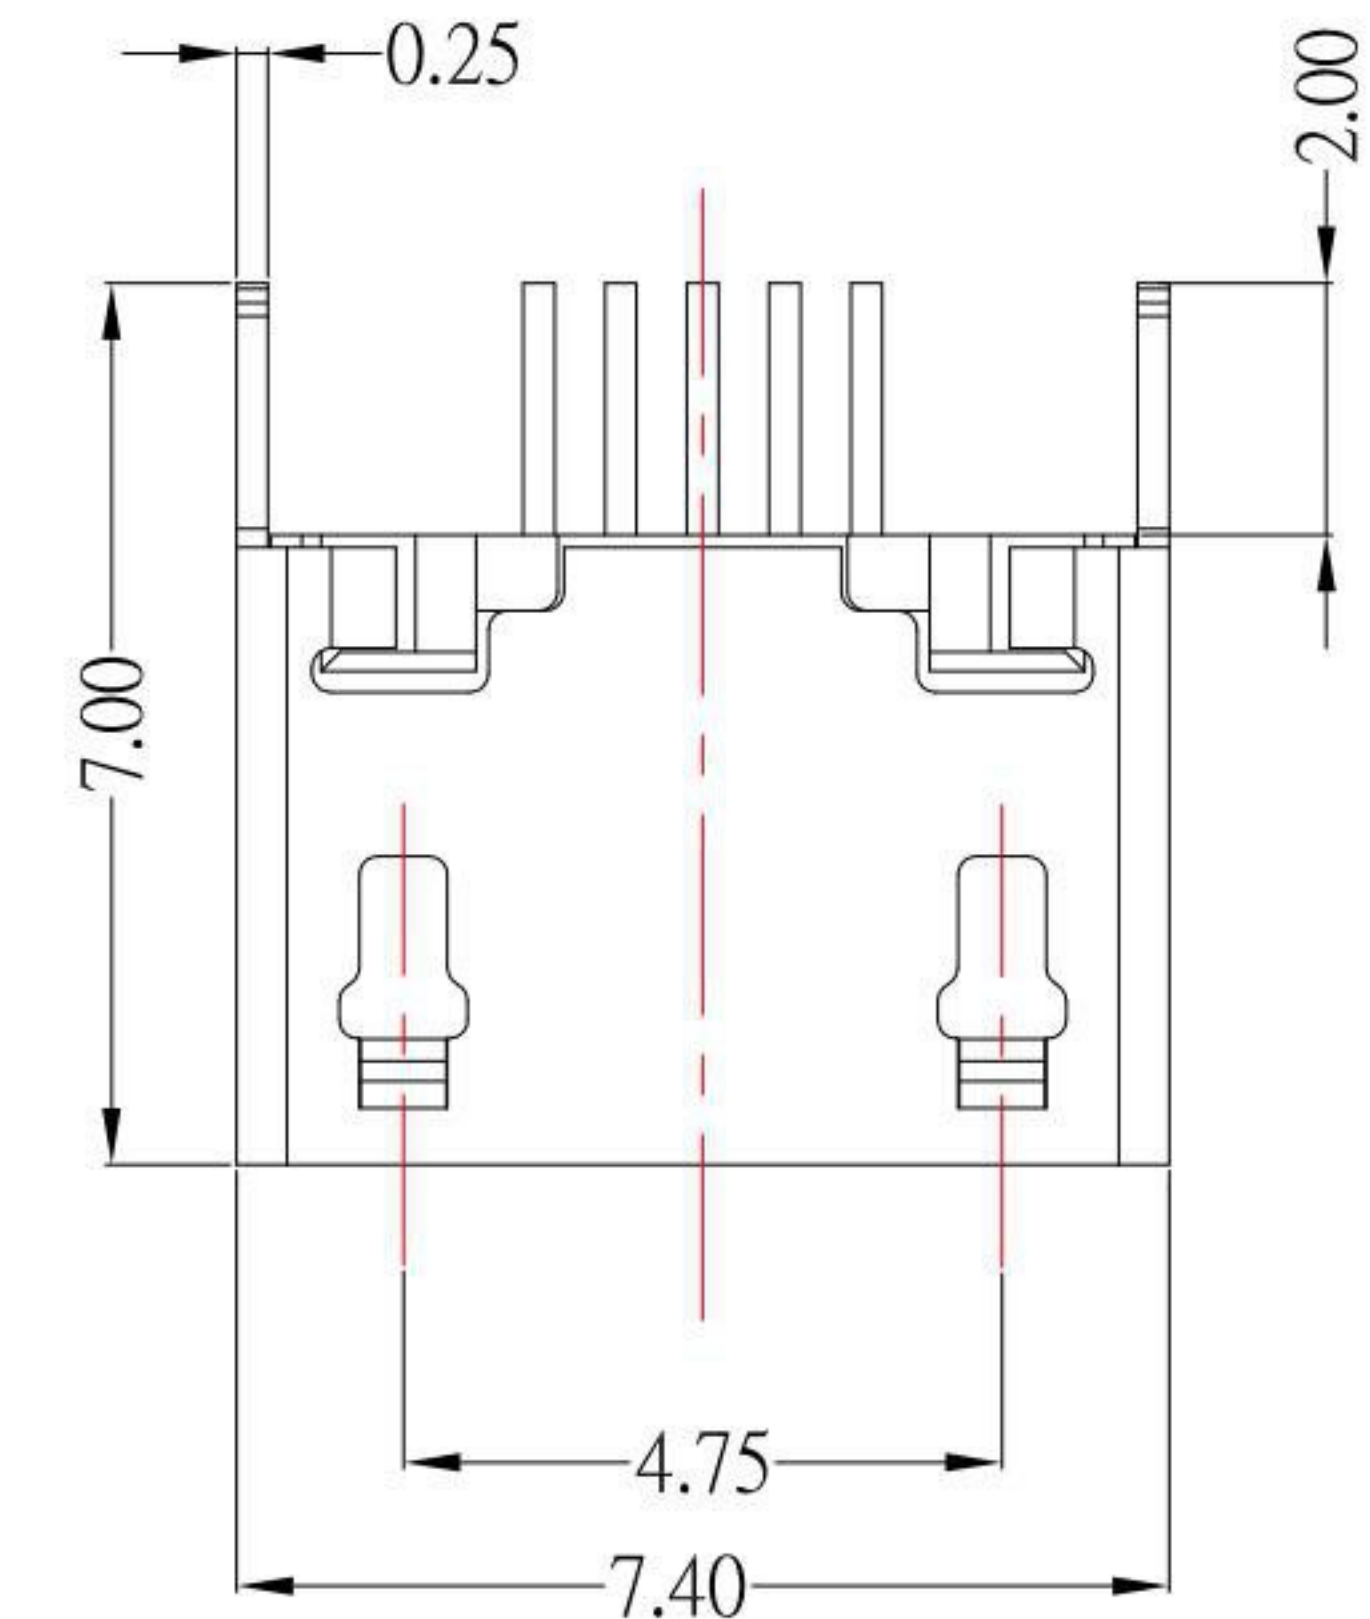

SPECIFICATIONS

- 1.Electrical:
- 1.1 Contact resistance : 30mΩ max.
 - 1.2 Dielectric withstanding voltage : 100 V AC.
 - 1.3 Insulation resistance : 100MΩ min.
- 2.Mechanical:
- 2.1 Mate and unmate force:
 - 2.1.1 Mate force : 35N MAX
 - 2.1.2 Unmate force : 10N MIN
 - 2.2 Durability : 3,000 cycles MIN.
- 3.Environment:
- 3.1 Operating Temperature : -30℃ to +85℃.
- 4.Material:
- 4.1 Housing: LCP,Black
 - 4.2 Contact: Phosphor Bronze
 - 4.3 Shell: SUS
- 5.Finish:
- 5.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
 - 5.2 Shell: Tin under Plated surface layer

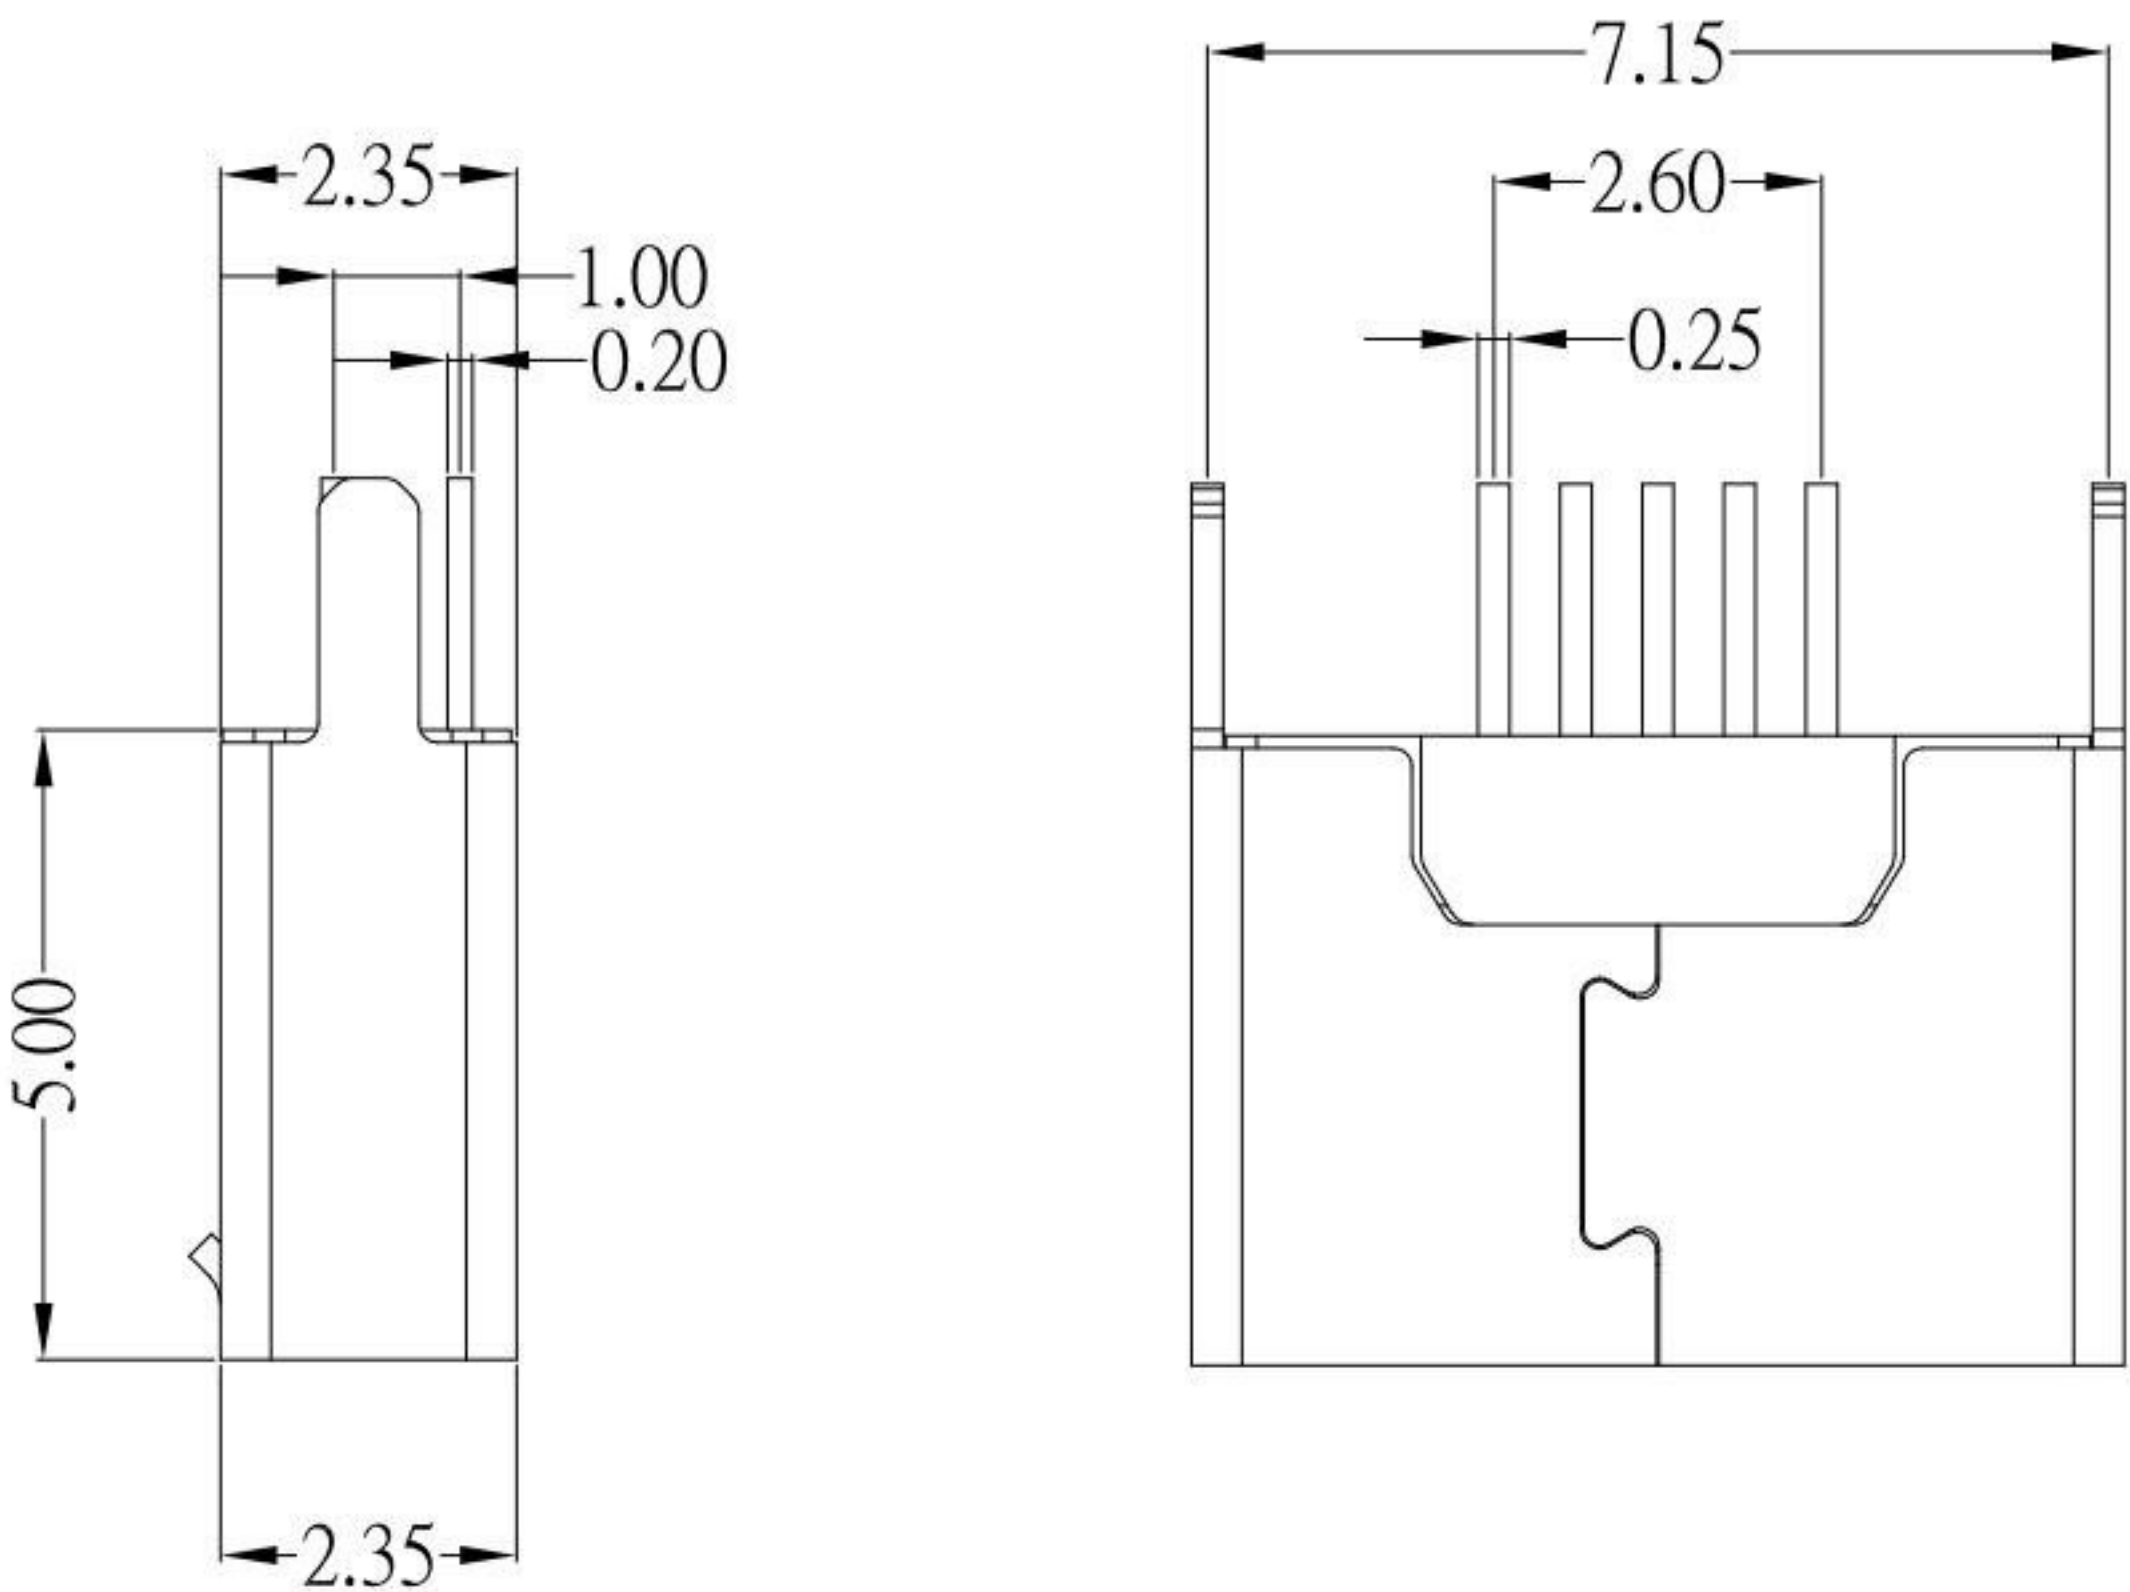

P.C.B LAYOUT MOUNTING PATTERN

				KSD 科斯达电子科技有限公司				DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR	
				SWITCH CONNECTOR 全球 互连零组件制造企业				Jack Lu	11/05/14			MICRO USB AB TYPE vertical DIP 平口 脚长2.0mm	
				KSD ELECTRONIC TECHNOLOGY Co., LTD				CHECKED BY:	DATE	FINISH	MODLE	DWG NO.	SIZE
								Jacky Chen	11/05/14	SCALE	1 : 1		A4
								APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	VER
								Tony Kao	11/05/14			MRUSB-5AB-V3-S129	R