

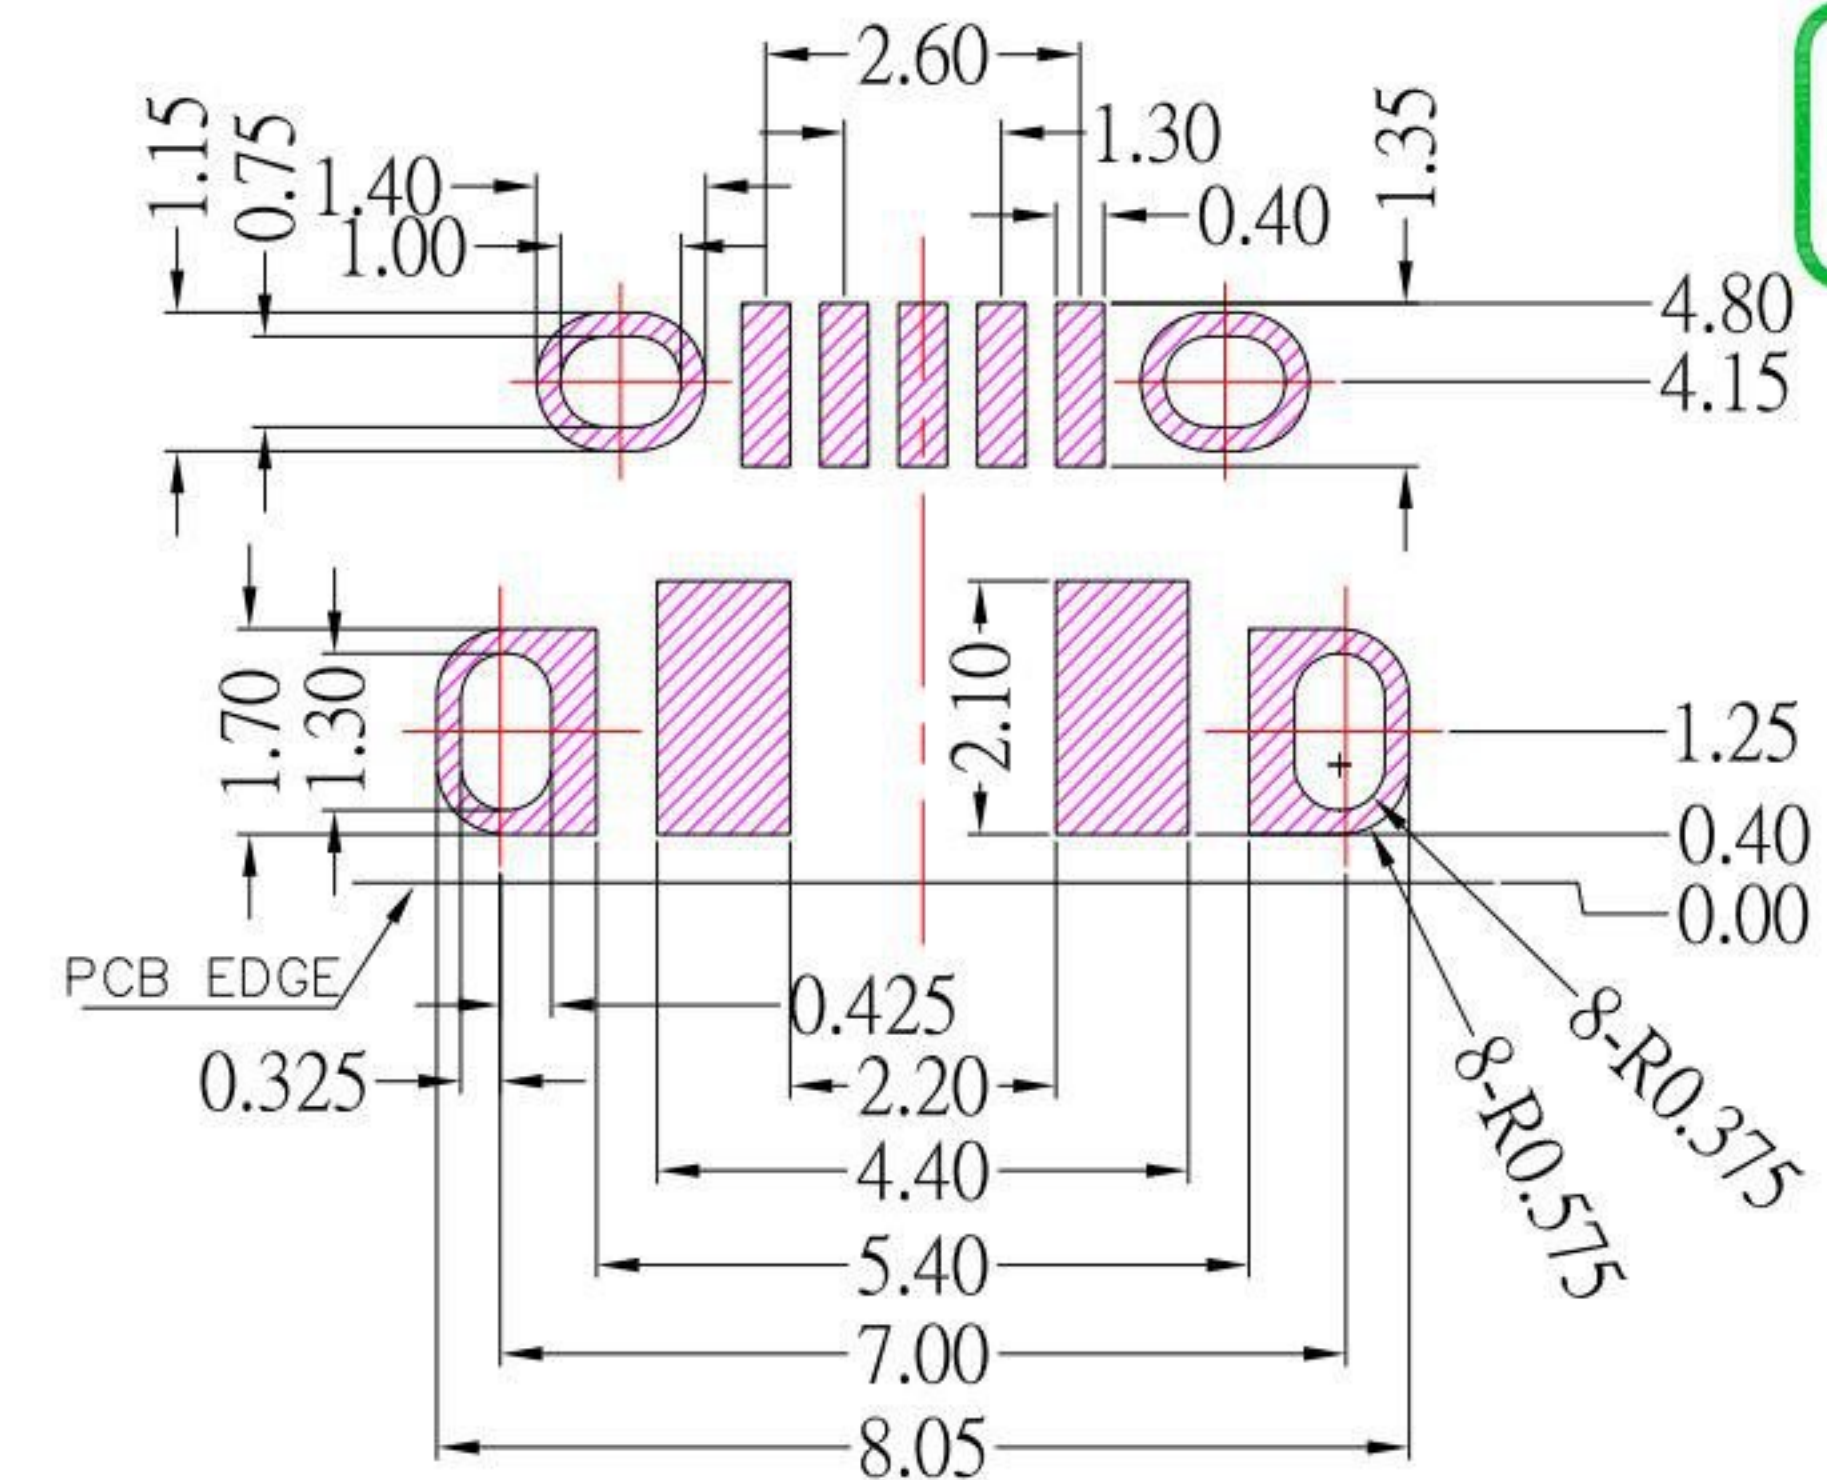
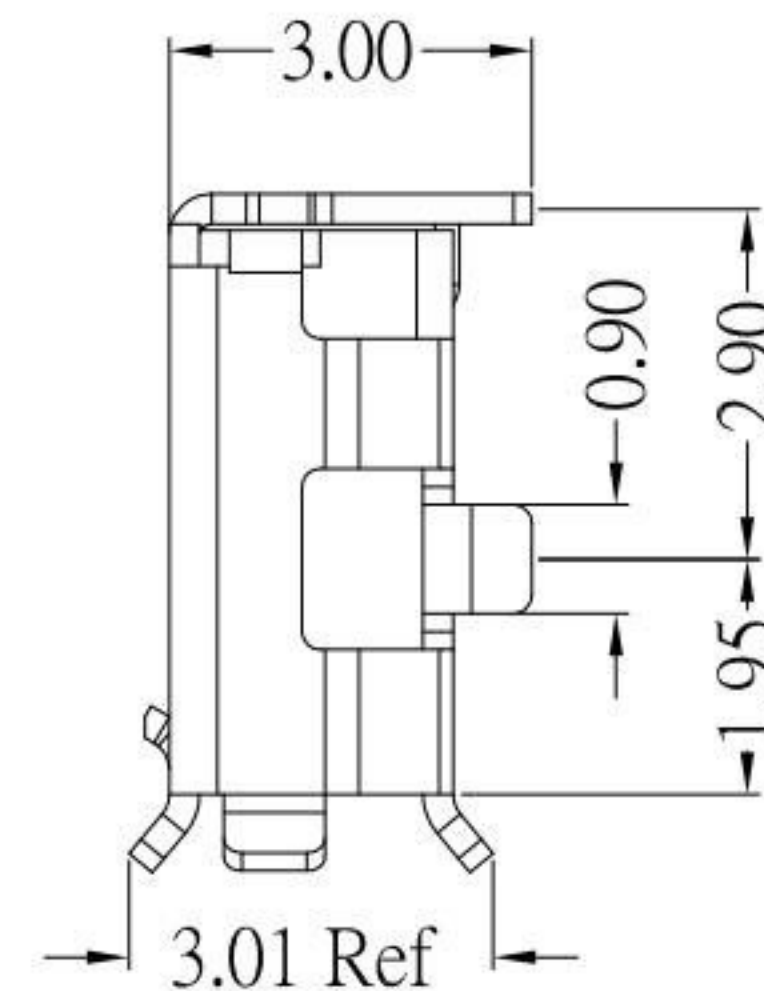
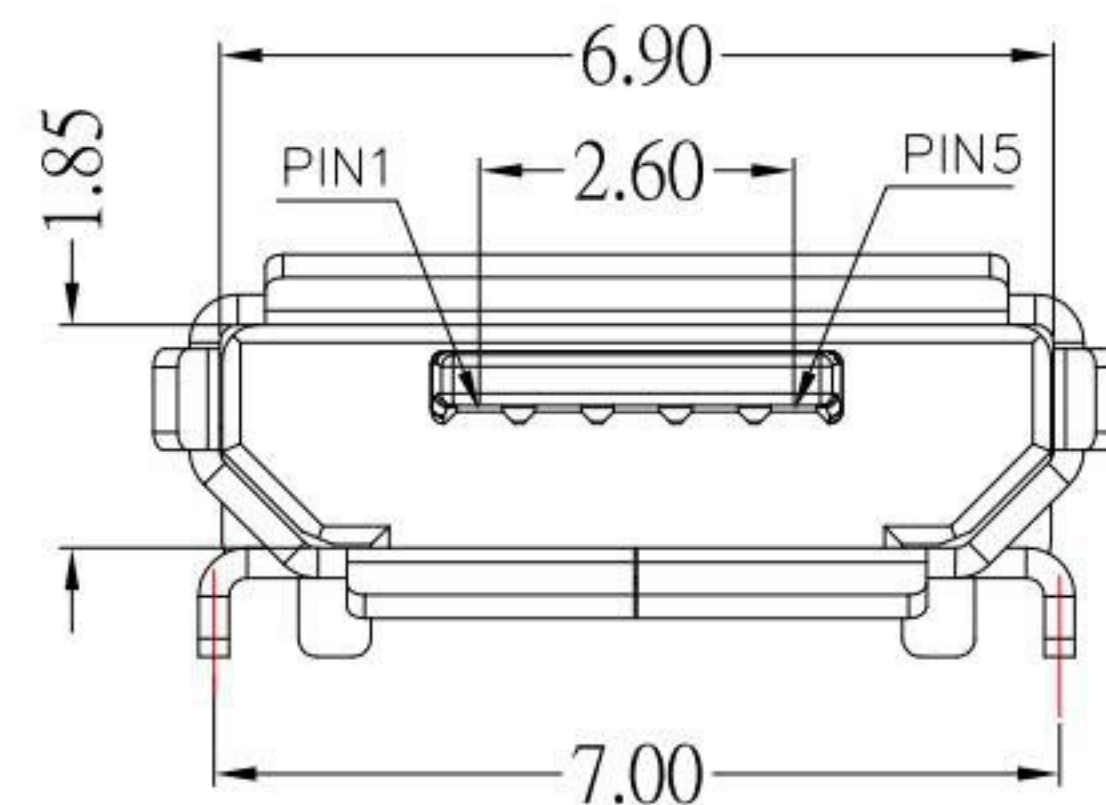
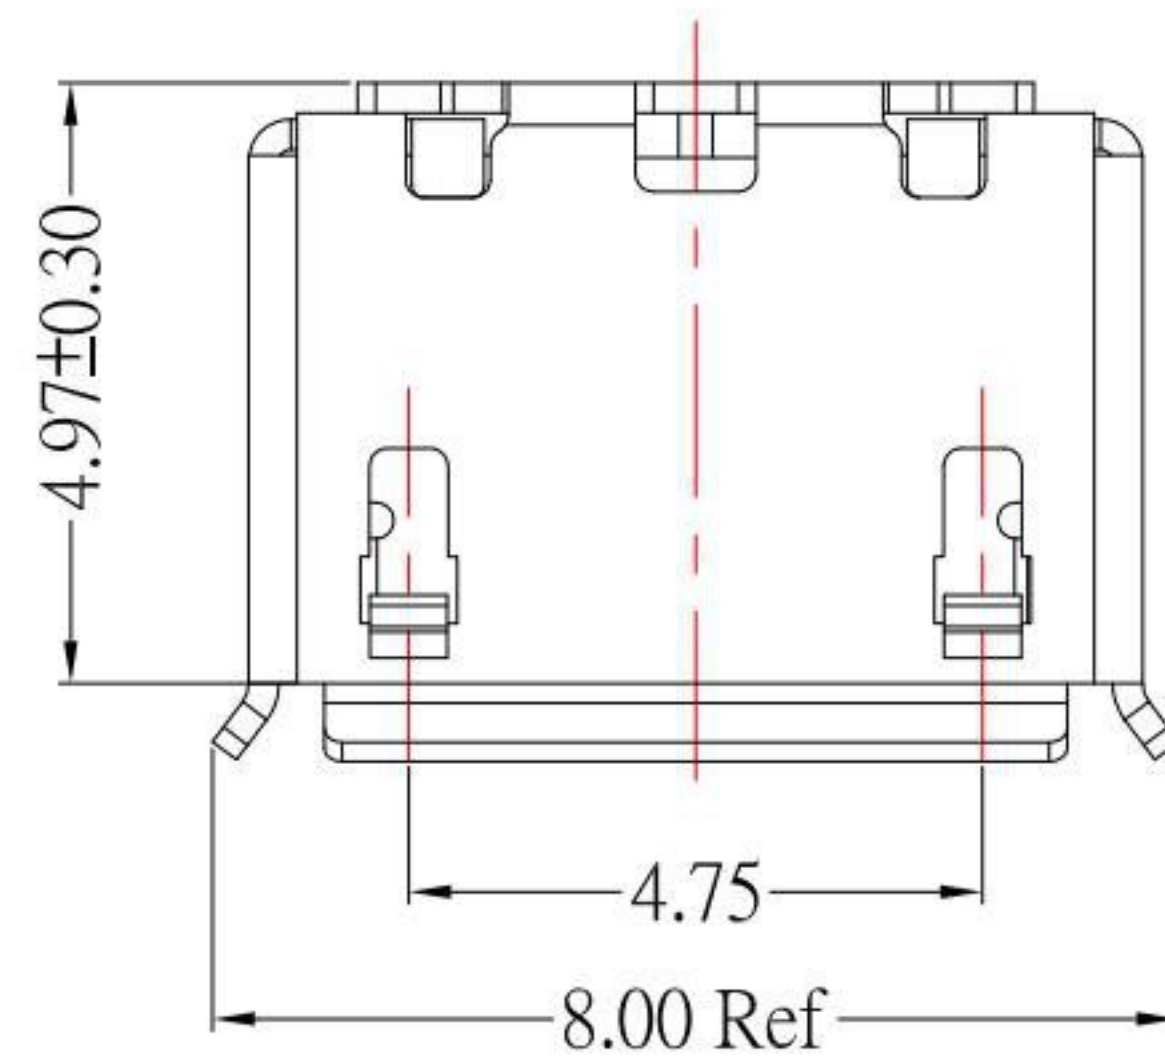


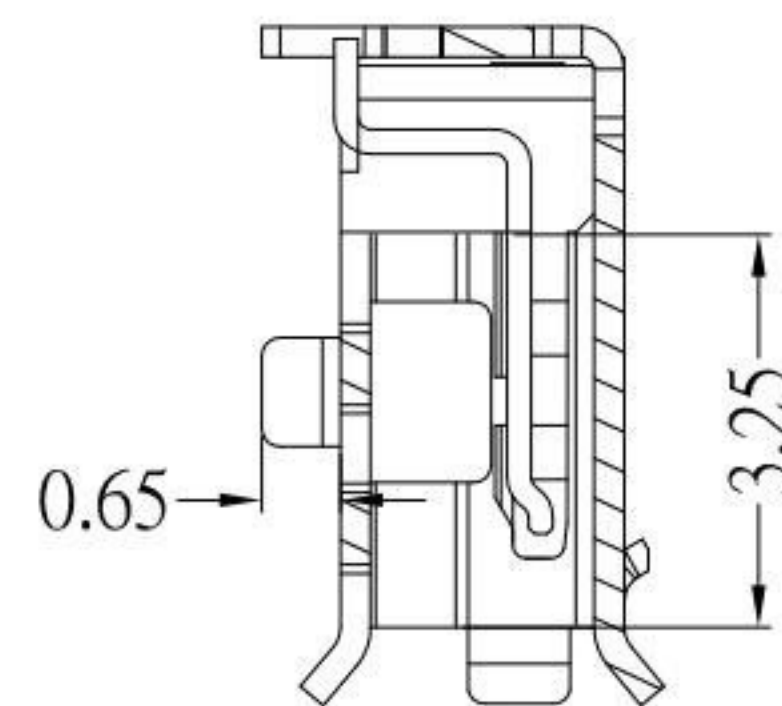

MRUSB-5B-D16x-S347

SHELL鍍層:

TN
NI

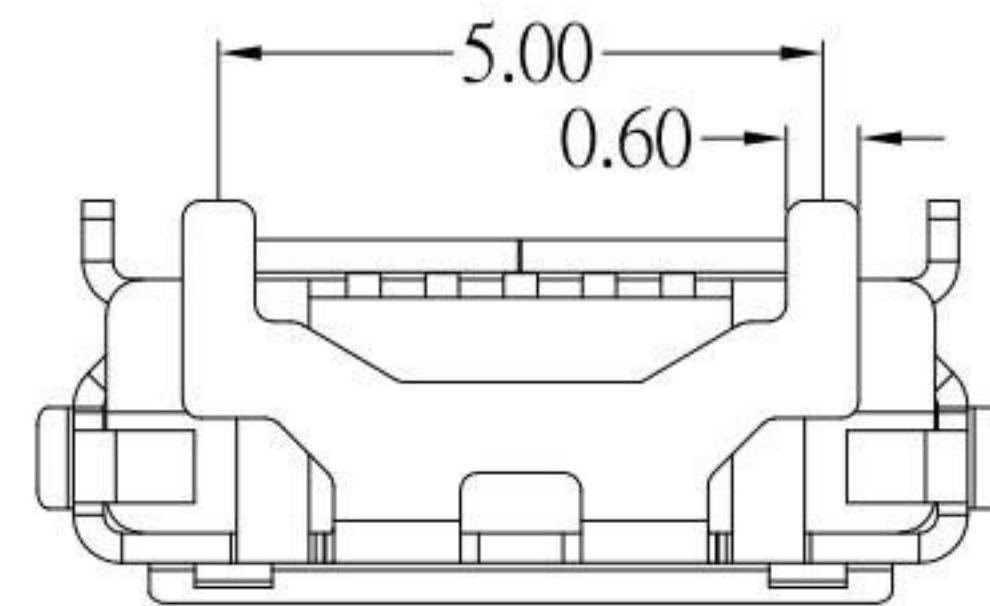

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

1.MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls ;

Nickel under plated overall

2.2 SHELL: NICKEL or TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 CURRENT RATING: 1.8 A Max(PIN1,5)

1.0 A Max(PIN2,3,4)

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.


3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 09/22/20

CHECKED BY: DATE

Jacky Chen 09/22/20

APPROVED BY: DATE

Tony Kao 09/22/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 5P SMT 牛角型後蓋
PH:7.0-5.0mm

MRUSB-5B-D16x-S347

MRUSB-5B-D16x-S347

SIZE

A4

VER

R1