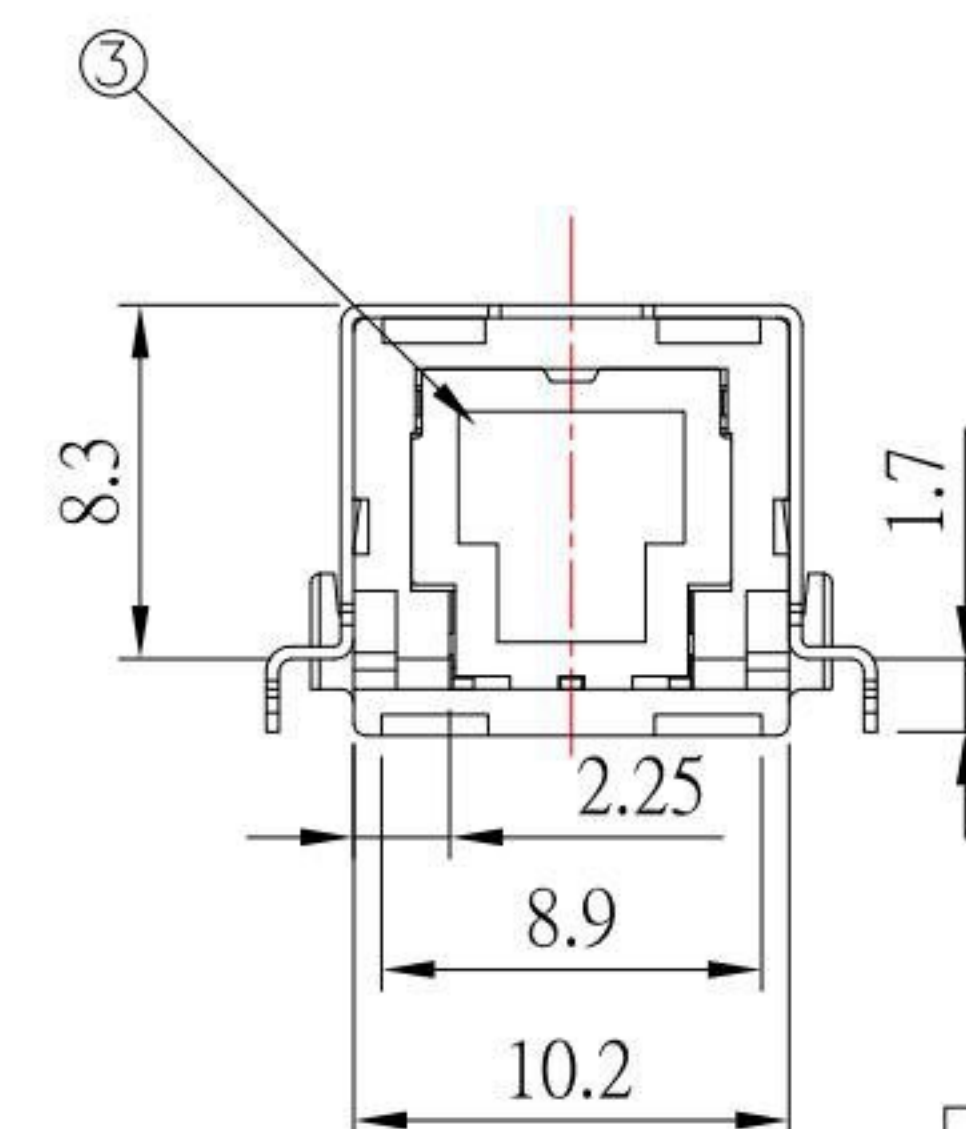
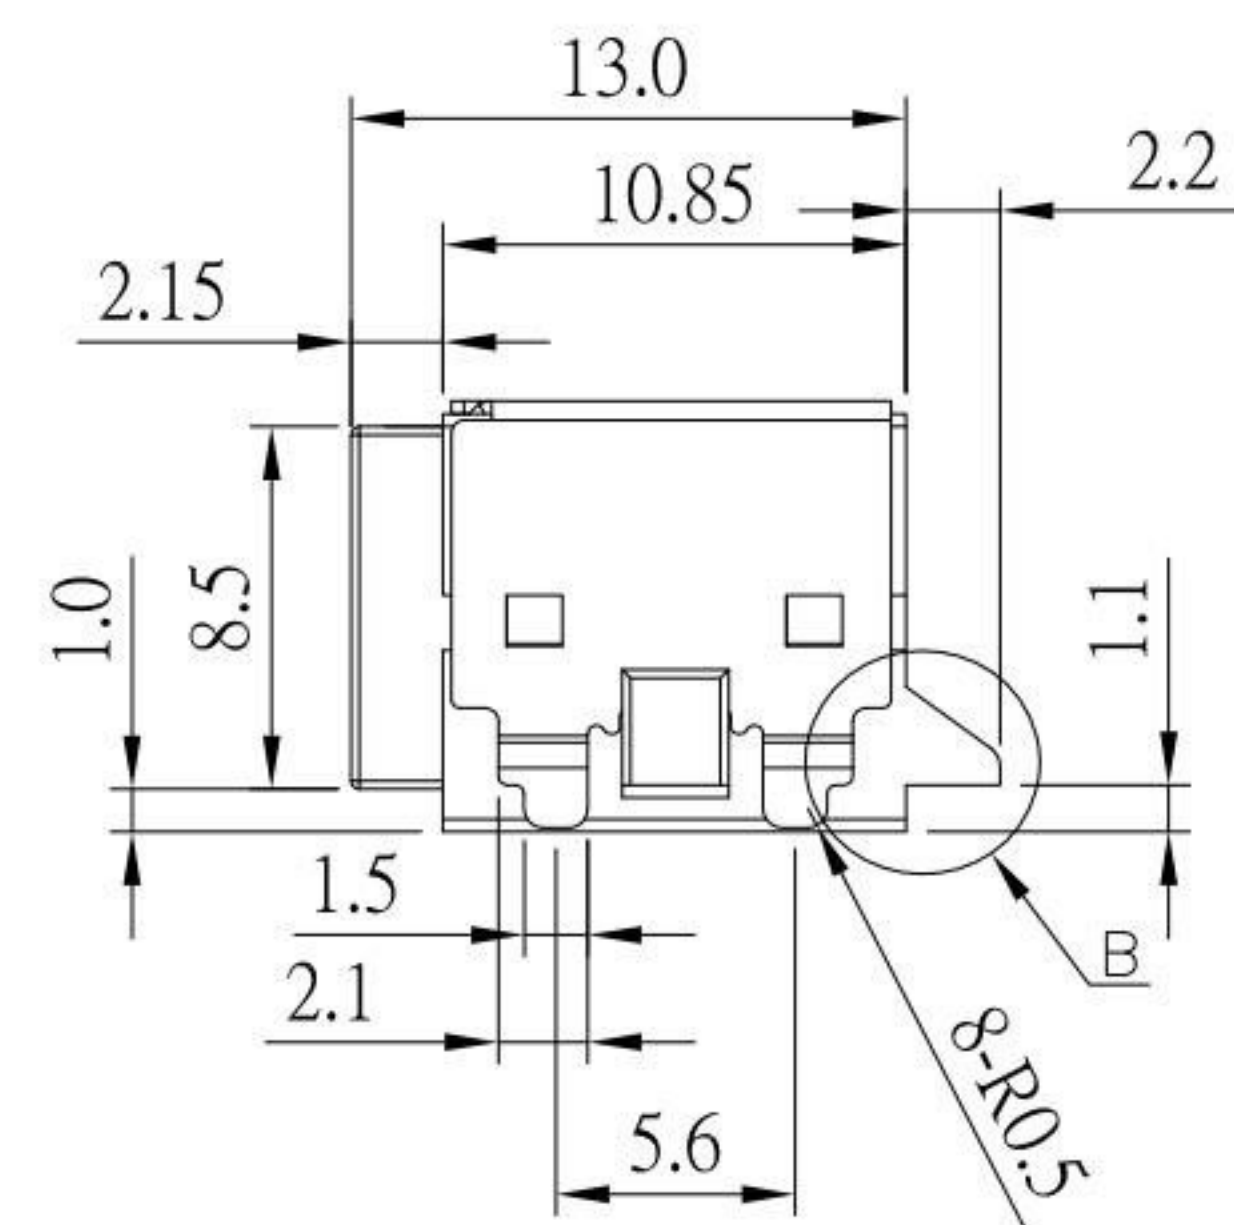
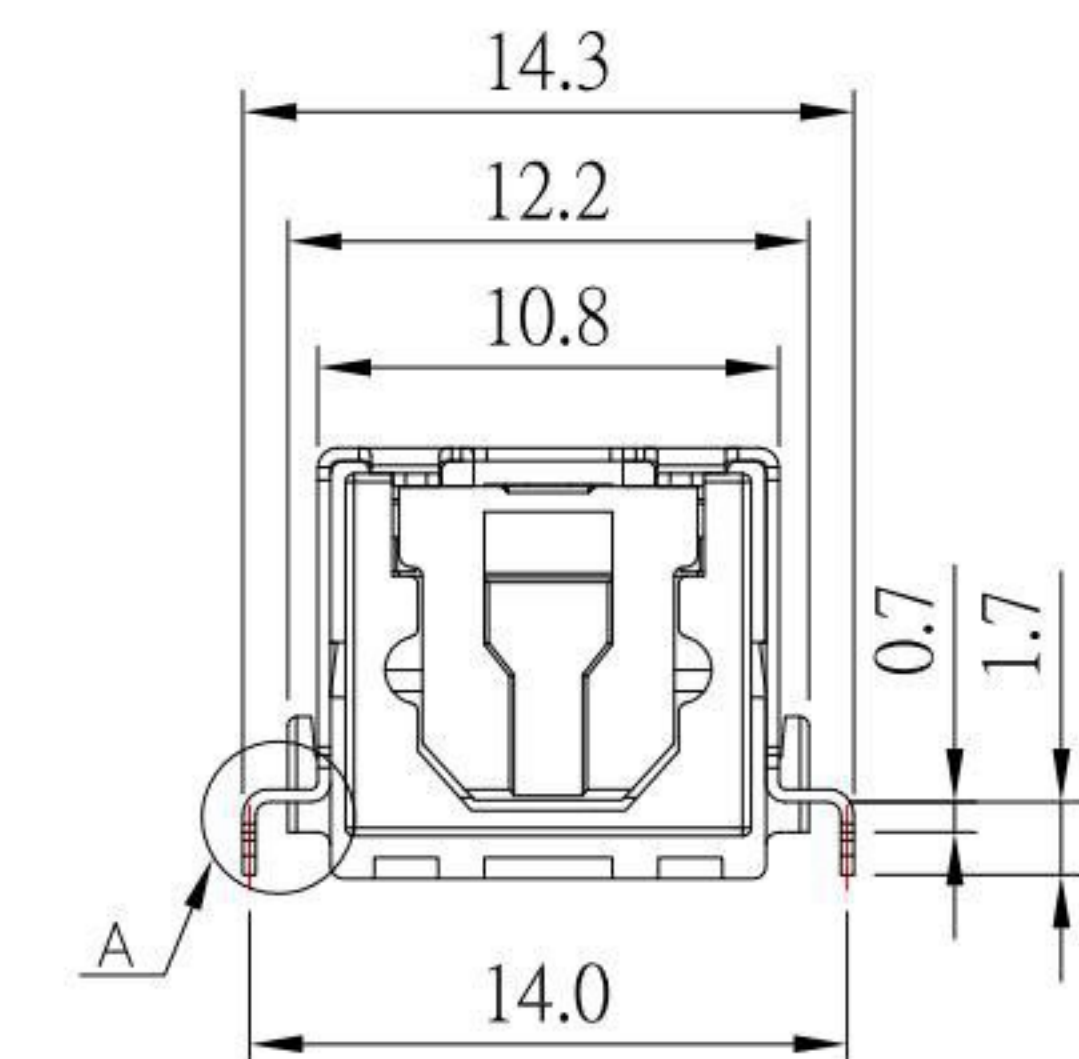
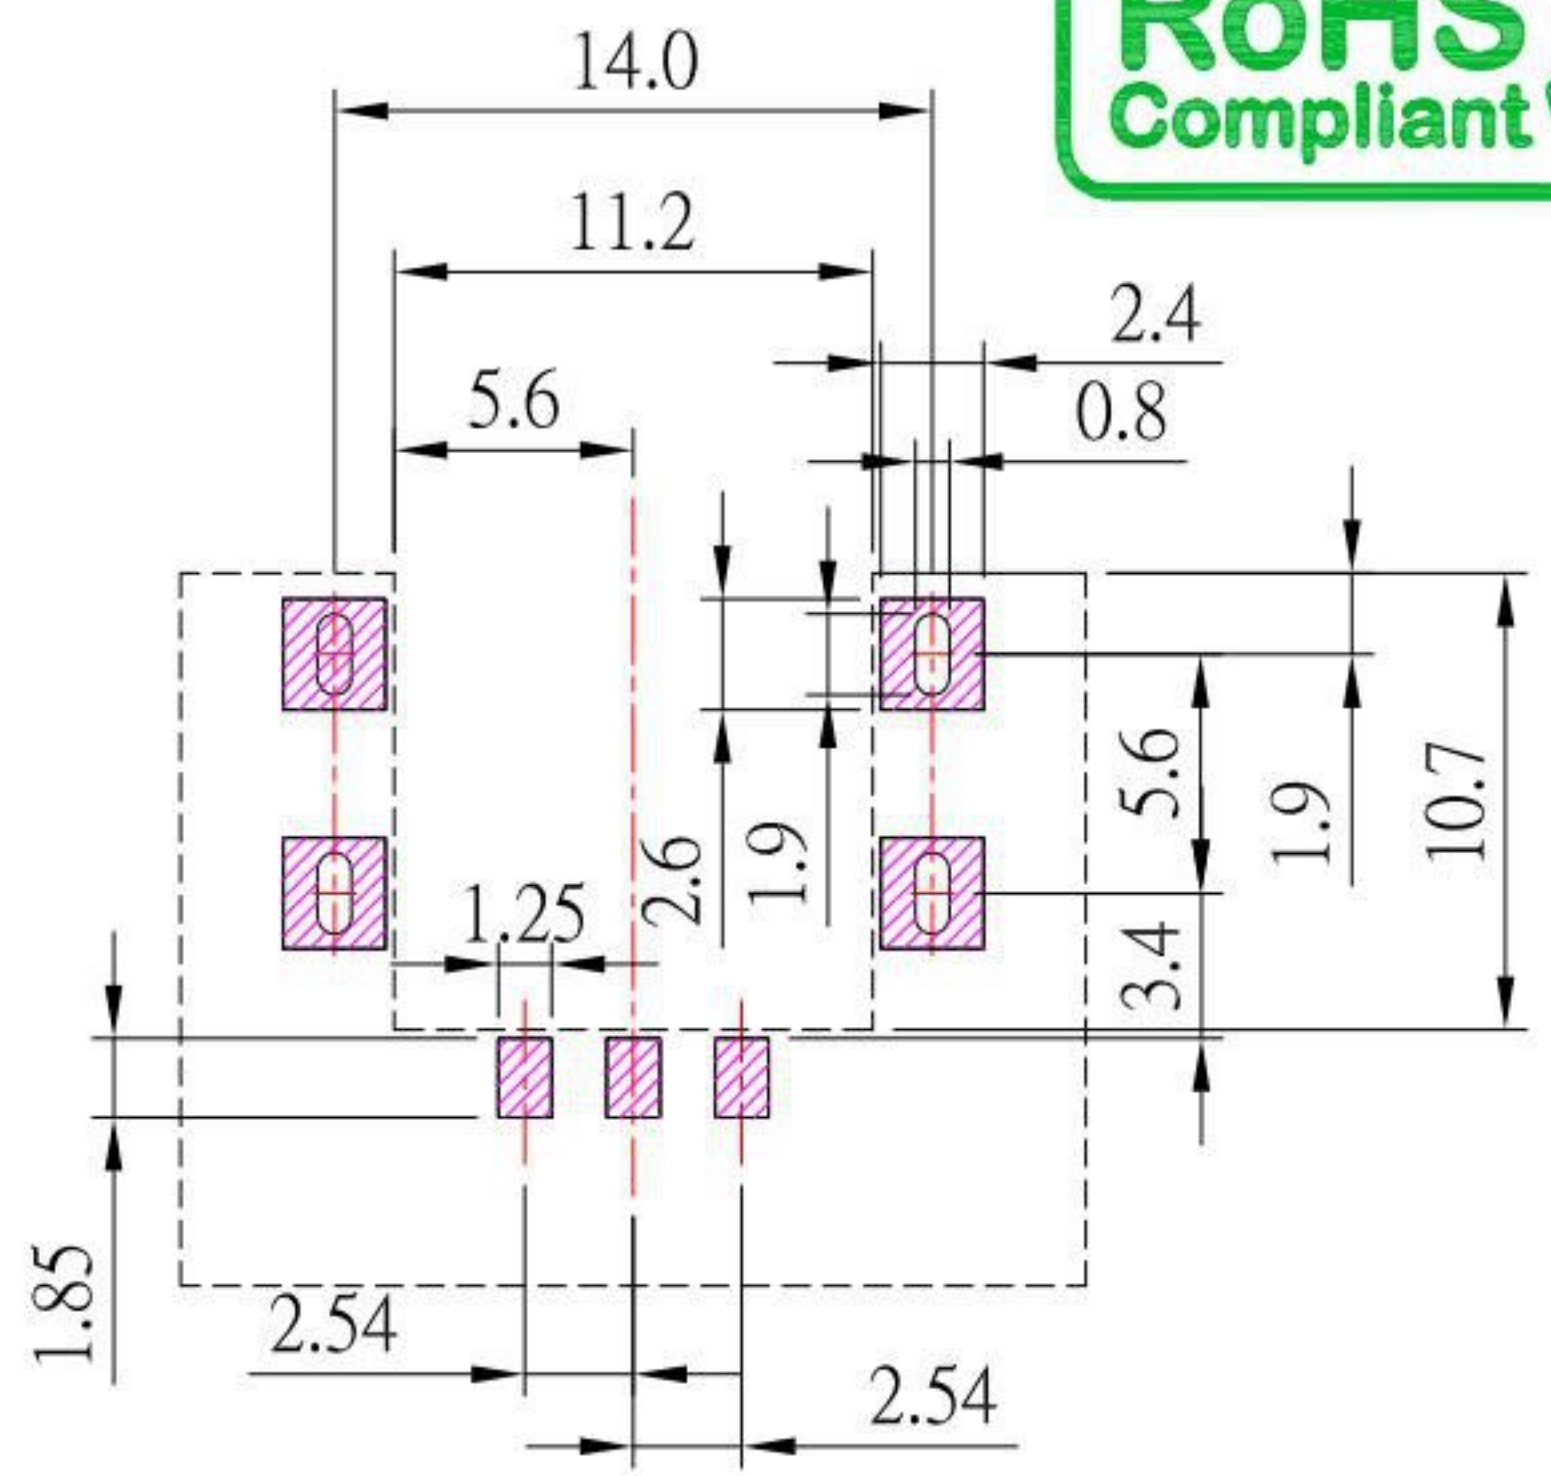
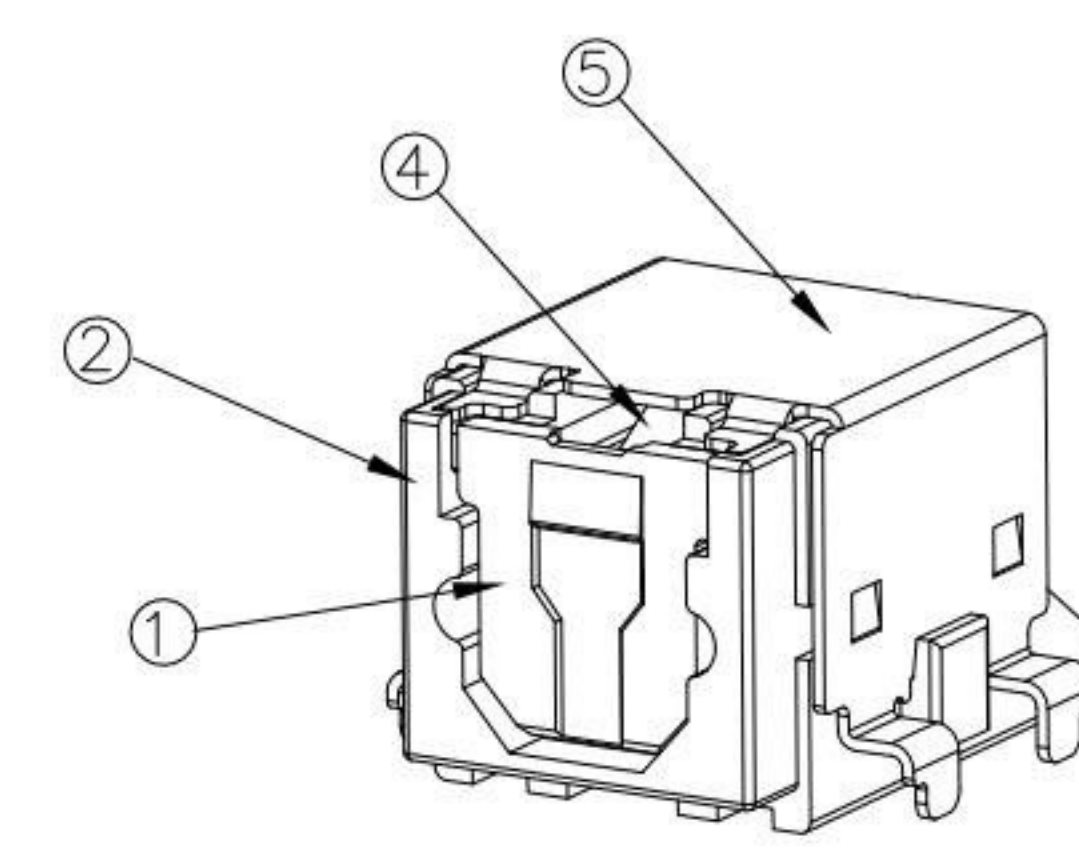
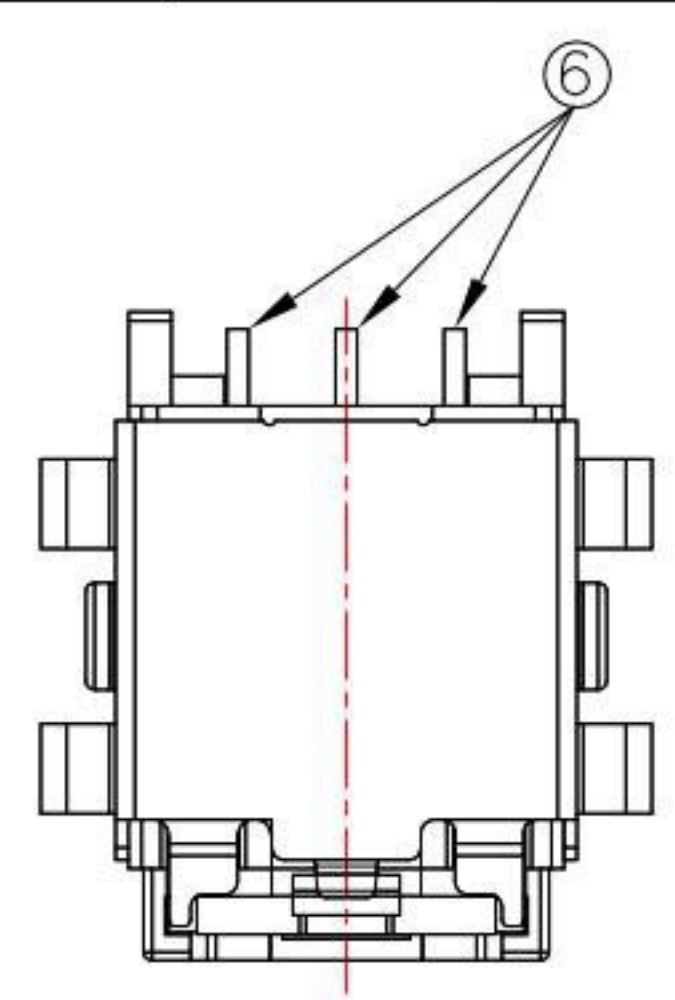
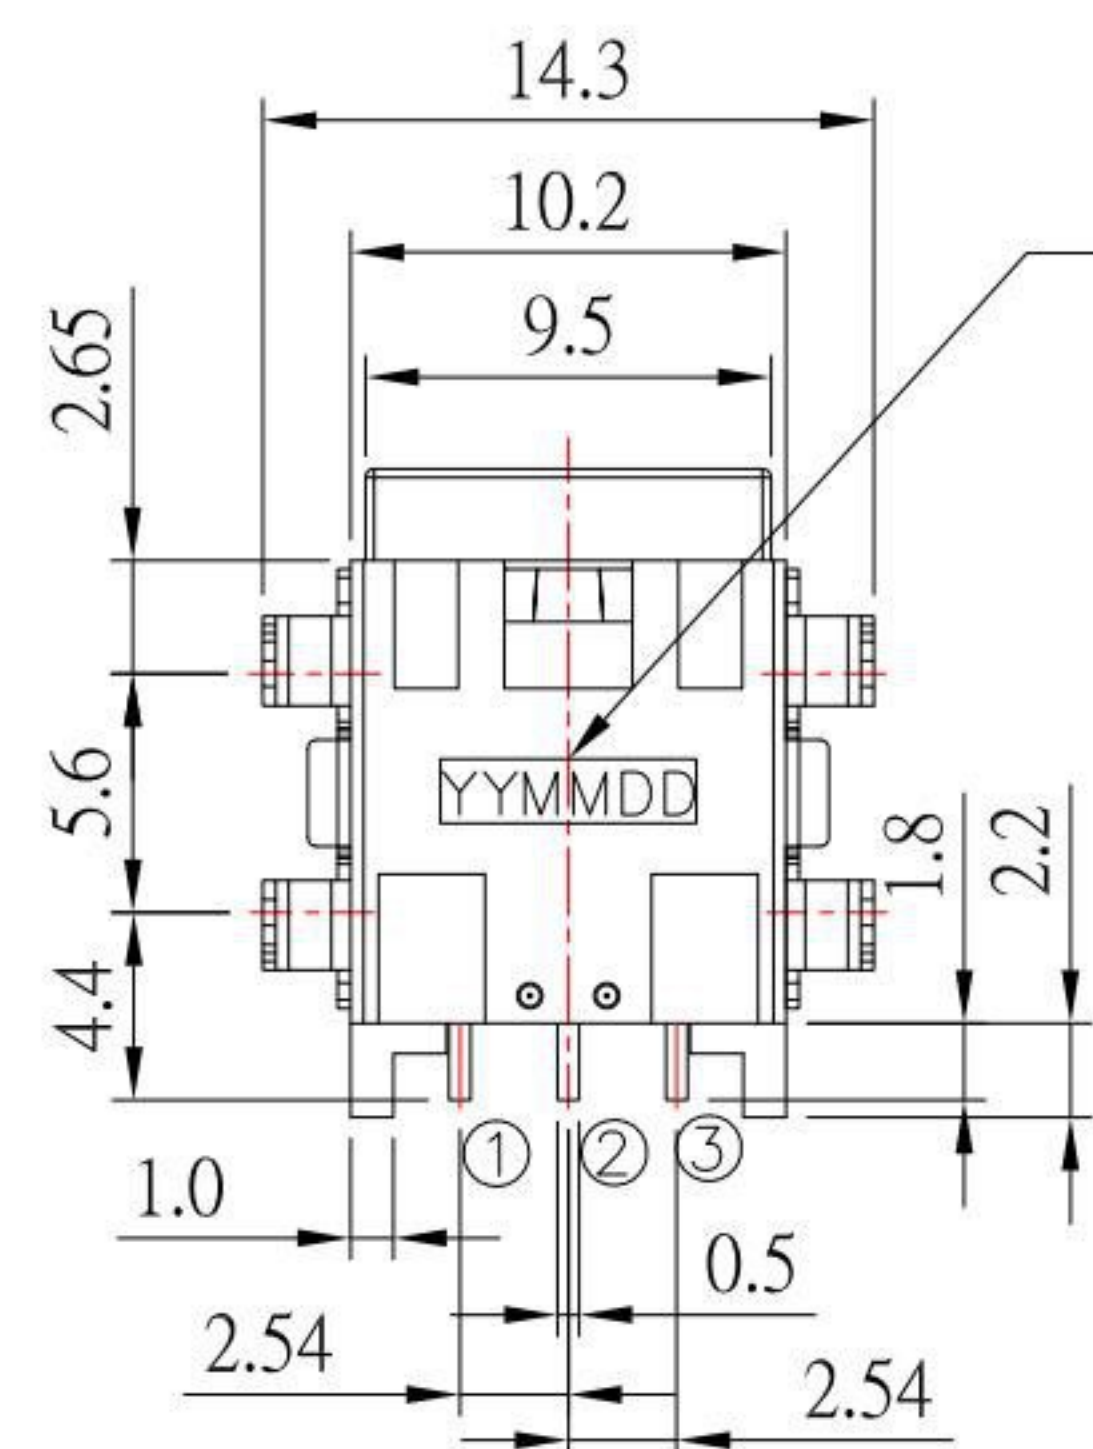
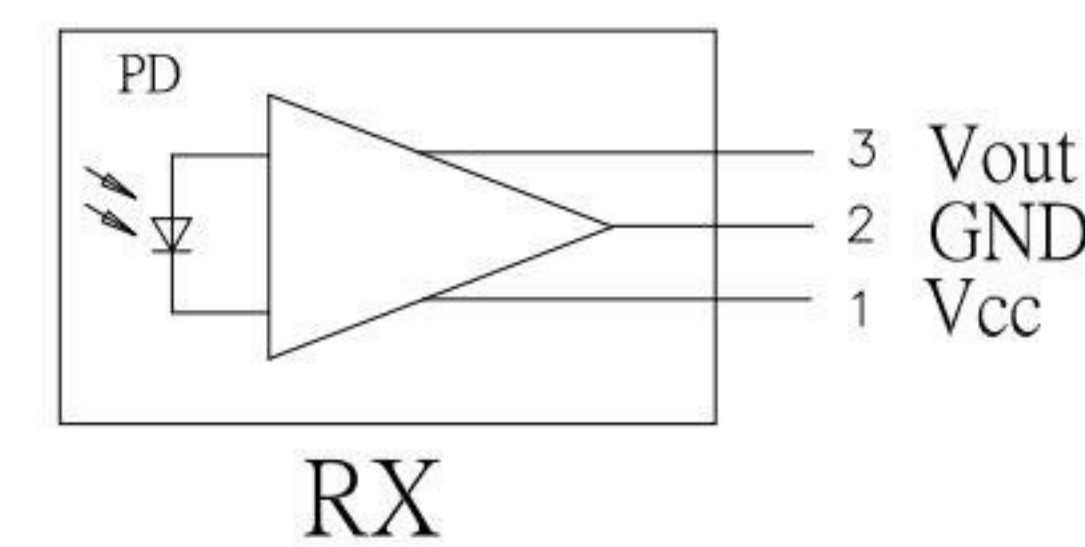
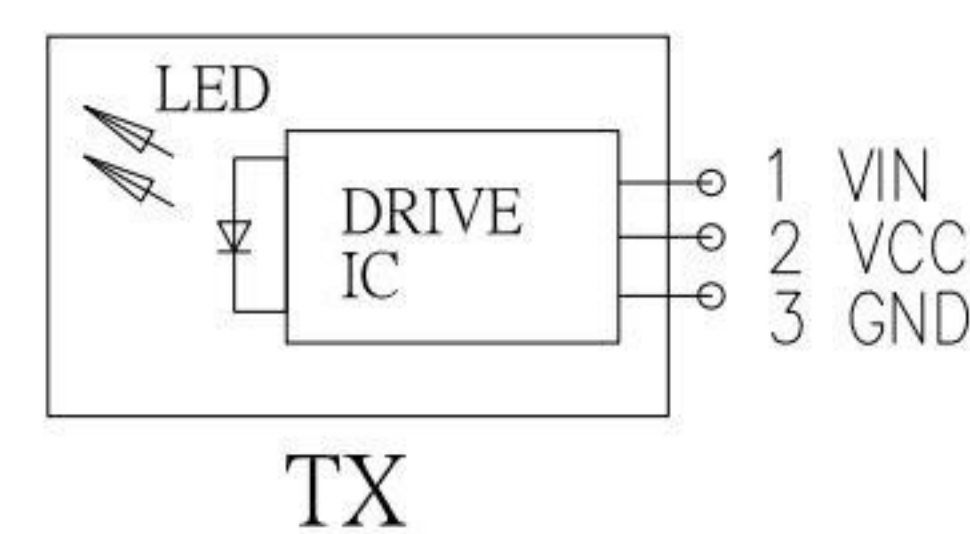


PCB LAYOUT
BOTTOM VIEW

DATE CODE:
YYMMDD
YY: YEAR(10~)
MM: MONTH(01~12)
DD: DATE(01~31)

TRANSMITTER

PIN CONFIG

① VIN
② VCC
③ GND

OJ-421F07AXX-S214

TX	1	16 Mbps
RX	2	25 Mbps

⑥	DRIVE IC(TX UNIT)			1	25 Mbps
⑤	SHELL	SPCC	Tin	1	
④	SPRING	SUS		1	
③	COVER	LCP		1	Black
②	HOUSING	LCP		1	Black
①	GATE	PA66		1	Black
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

				 科 斯 达 电 子 科 技 有 限 公 司 SWITCH CONNECTOR 全球互联网零组件制造企业 KSD ELECTRONIC TECHNOLOGY Co., LTD	DRAWN BY: Jack Lu		DATE: 04/14/20	MAT'L		TITLE	JACK	
					CHECKED BY: Jacky Chen		DATE: 04/14/20	FINISH		MODLE	OPTICAL JACK	
2	更新料號	Jack	041420		APPROVED BY: Tony Kao		DATE: 04/14/20	SCALE	1 : 1	DWG NO.	OJ-421F07AXXx-S214	SIZE: A4
1	更新料號	Jack	112019					SHEET NO.	1 of 1	PART NO.	OJ-421F07AXXx-S214	VER: R1
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle $\pm 0.3^\circ$	3RD. ANGEL'S		UNITS	MM				