


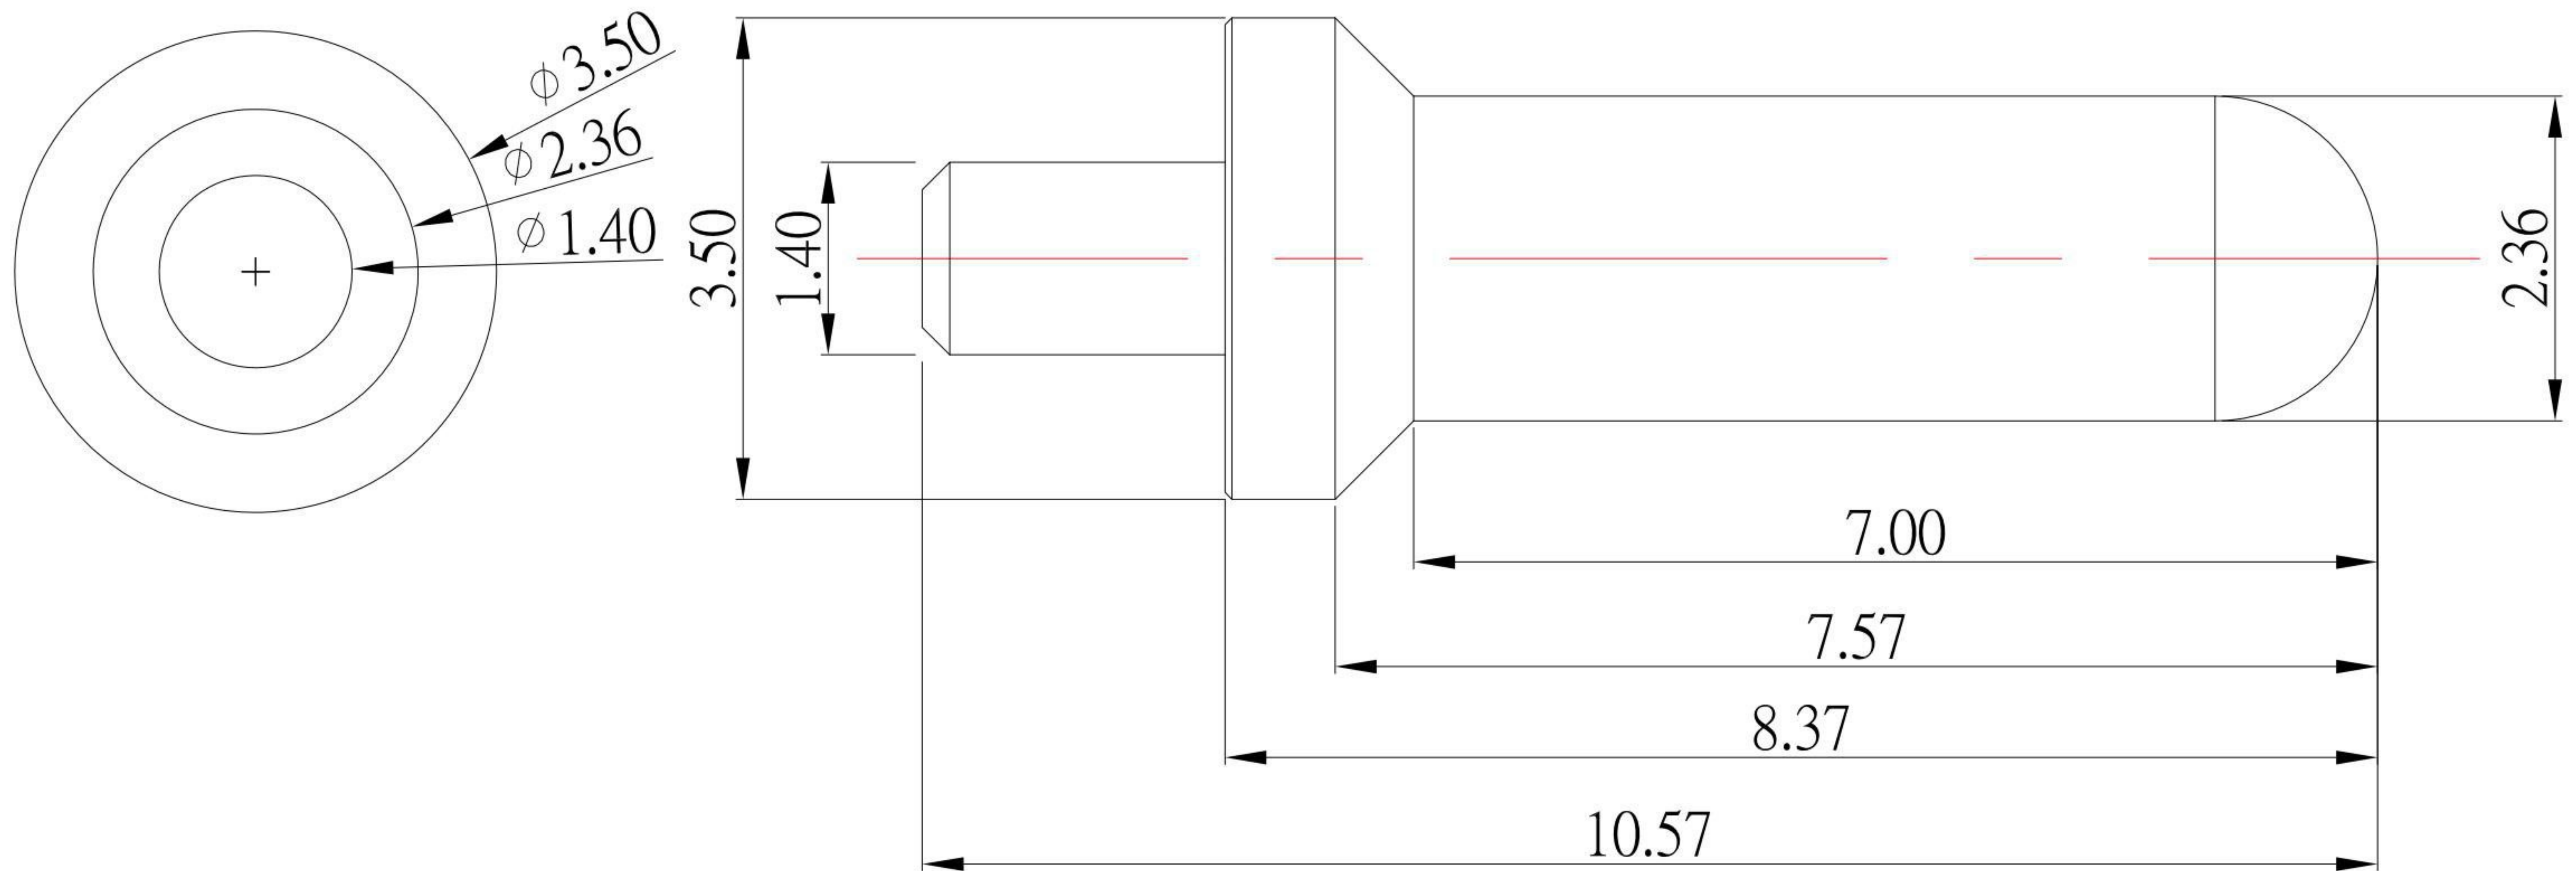


NOTE

1. Material
Barrel: Brass HBi59-1
2. Plating
Barrel: Au over Ni
3. Electrical
Rated current 20A Max.
4. Mechanical
Durability: 10,000 cycles(minimum)
5. To ensure the best usage, please operate it based on the working height
Based on the engineering drawings, shall not exceed the maximum allowed compression
6. To avoid arcing issue, The adaptor start to power supply after connector mated fully.

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互联网 零组件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	07/15/22				
CHECKED BY:	DATE	FINISH		MODLE	POGO PIN
Jacky Chen	07/15/22				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PGC-35837-1P-S353
Tony Kao	07/15/22	SHEET NO.	1 of 1	PART NO.	PGC-35837-1P-S353
					SIZE A4
					VER R1