

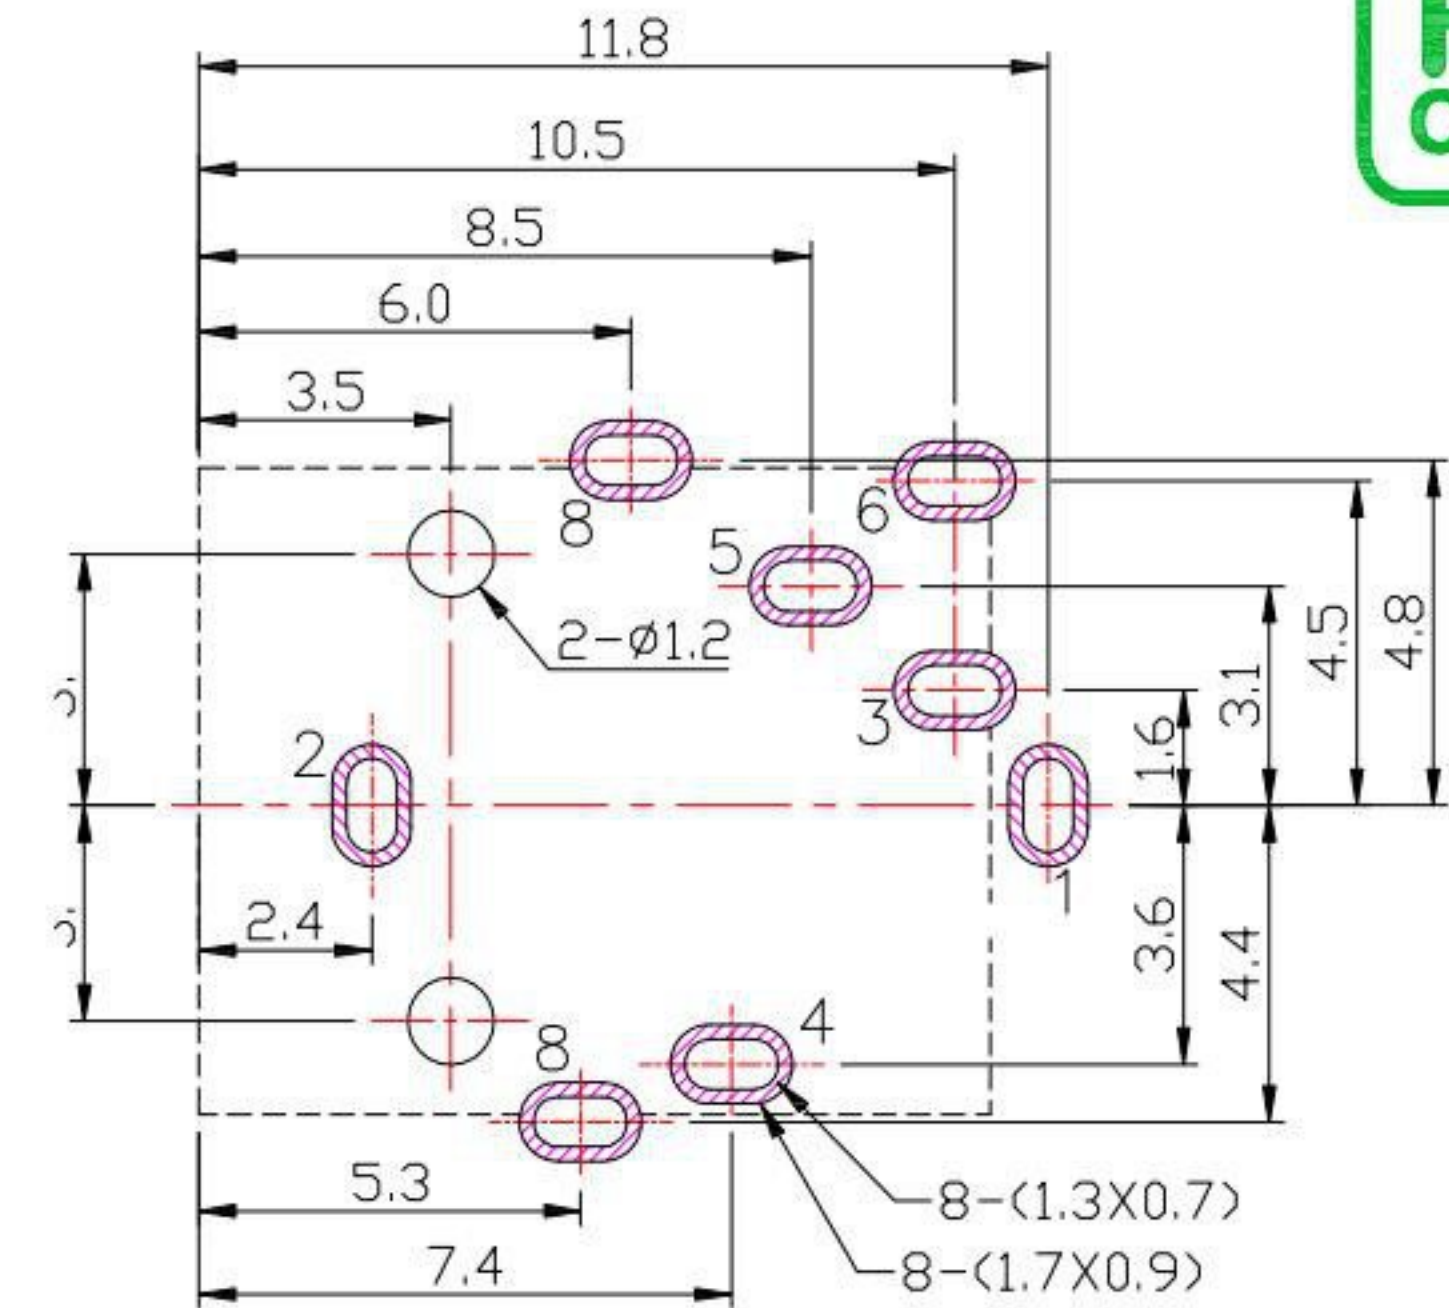
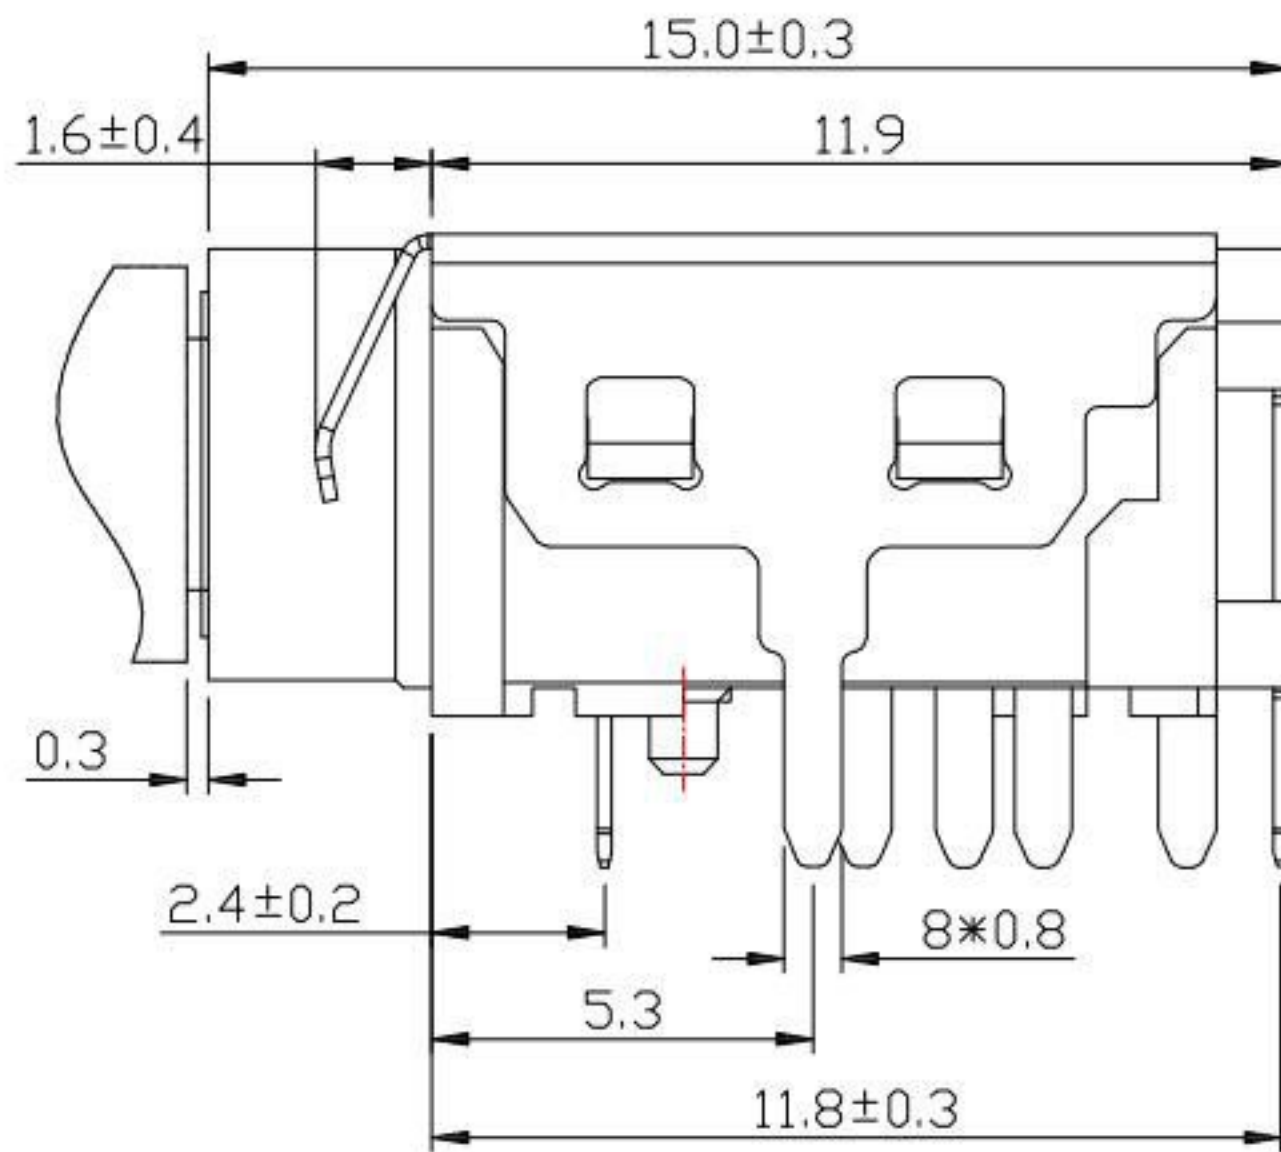
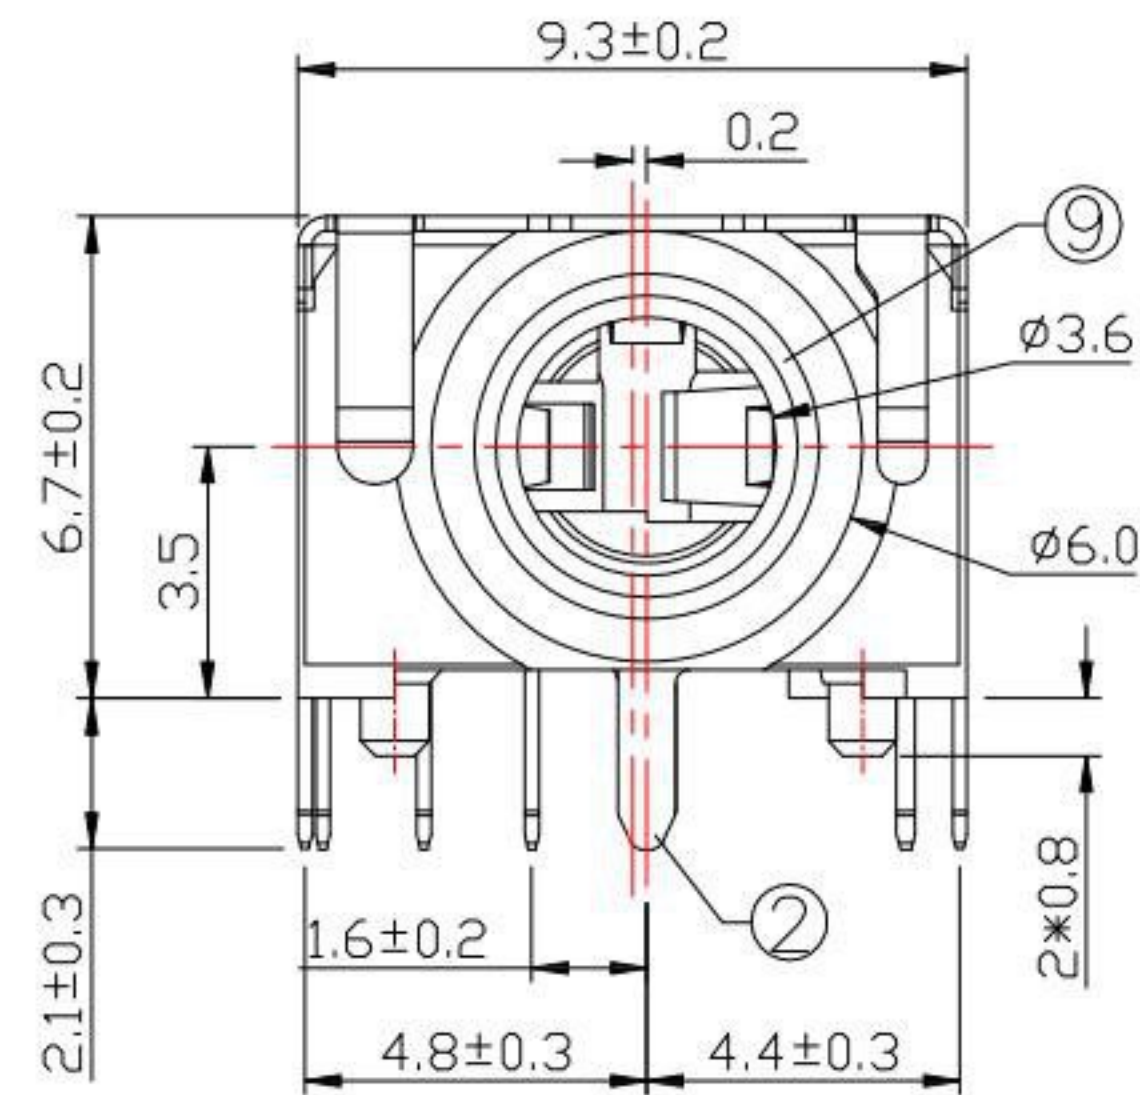
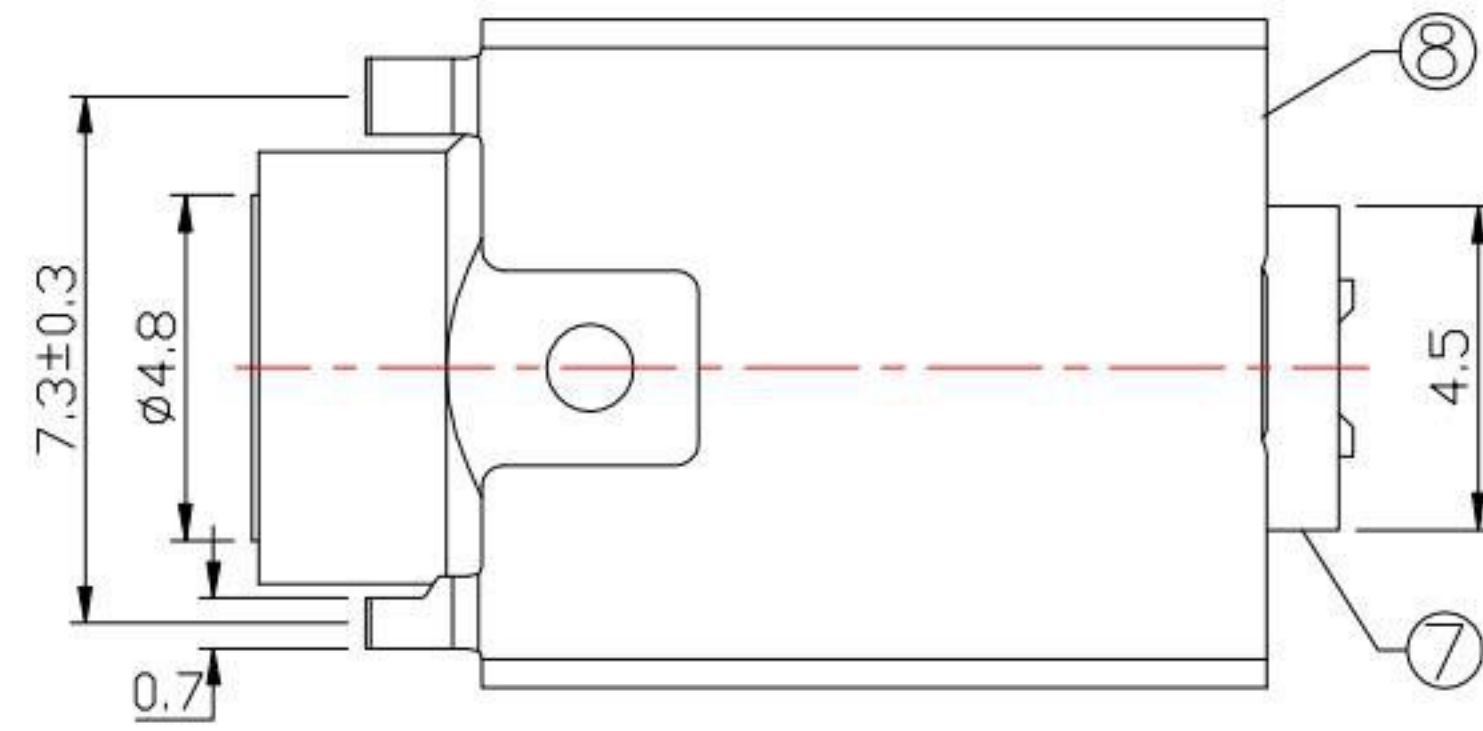



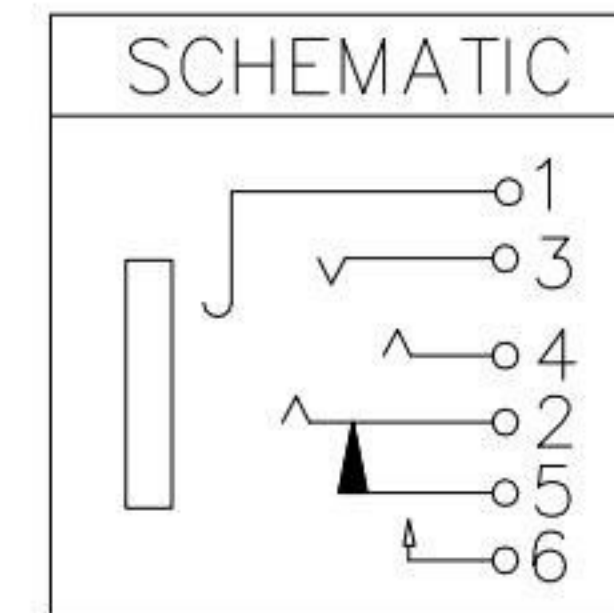


P.C.B LAYOUT
TOP VIEW

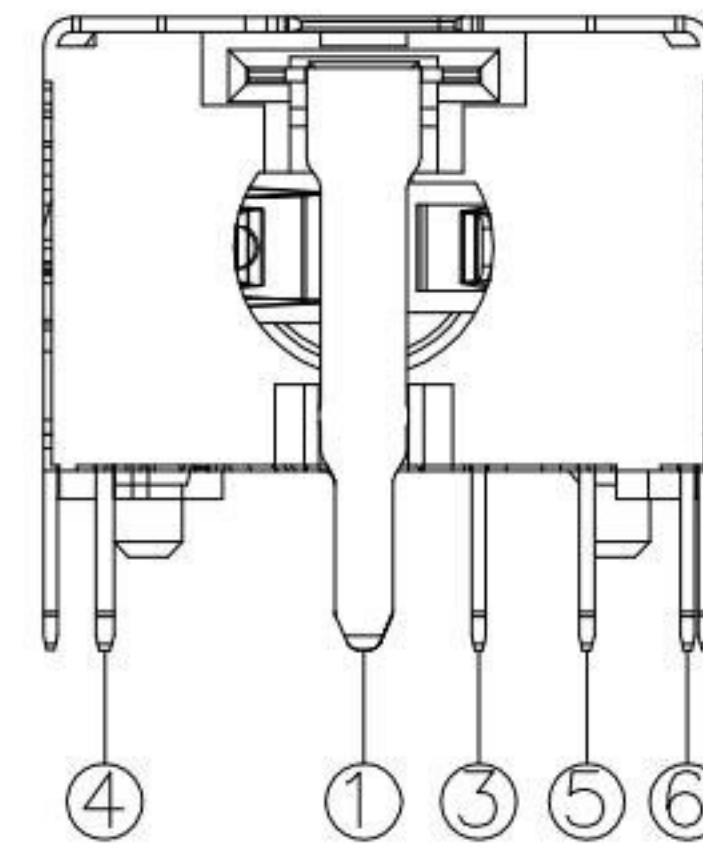

SPECIFICATION

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

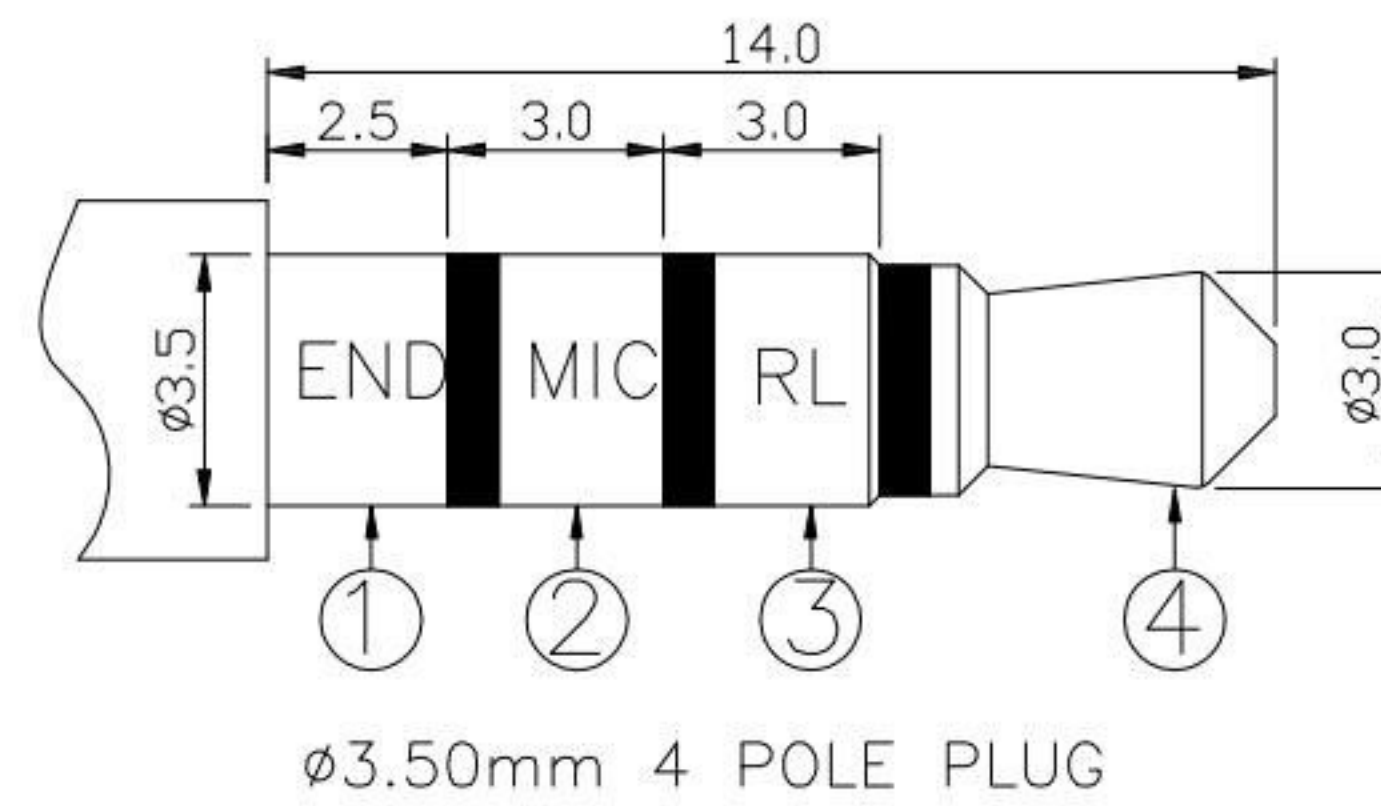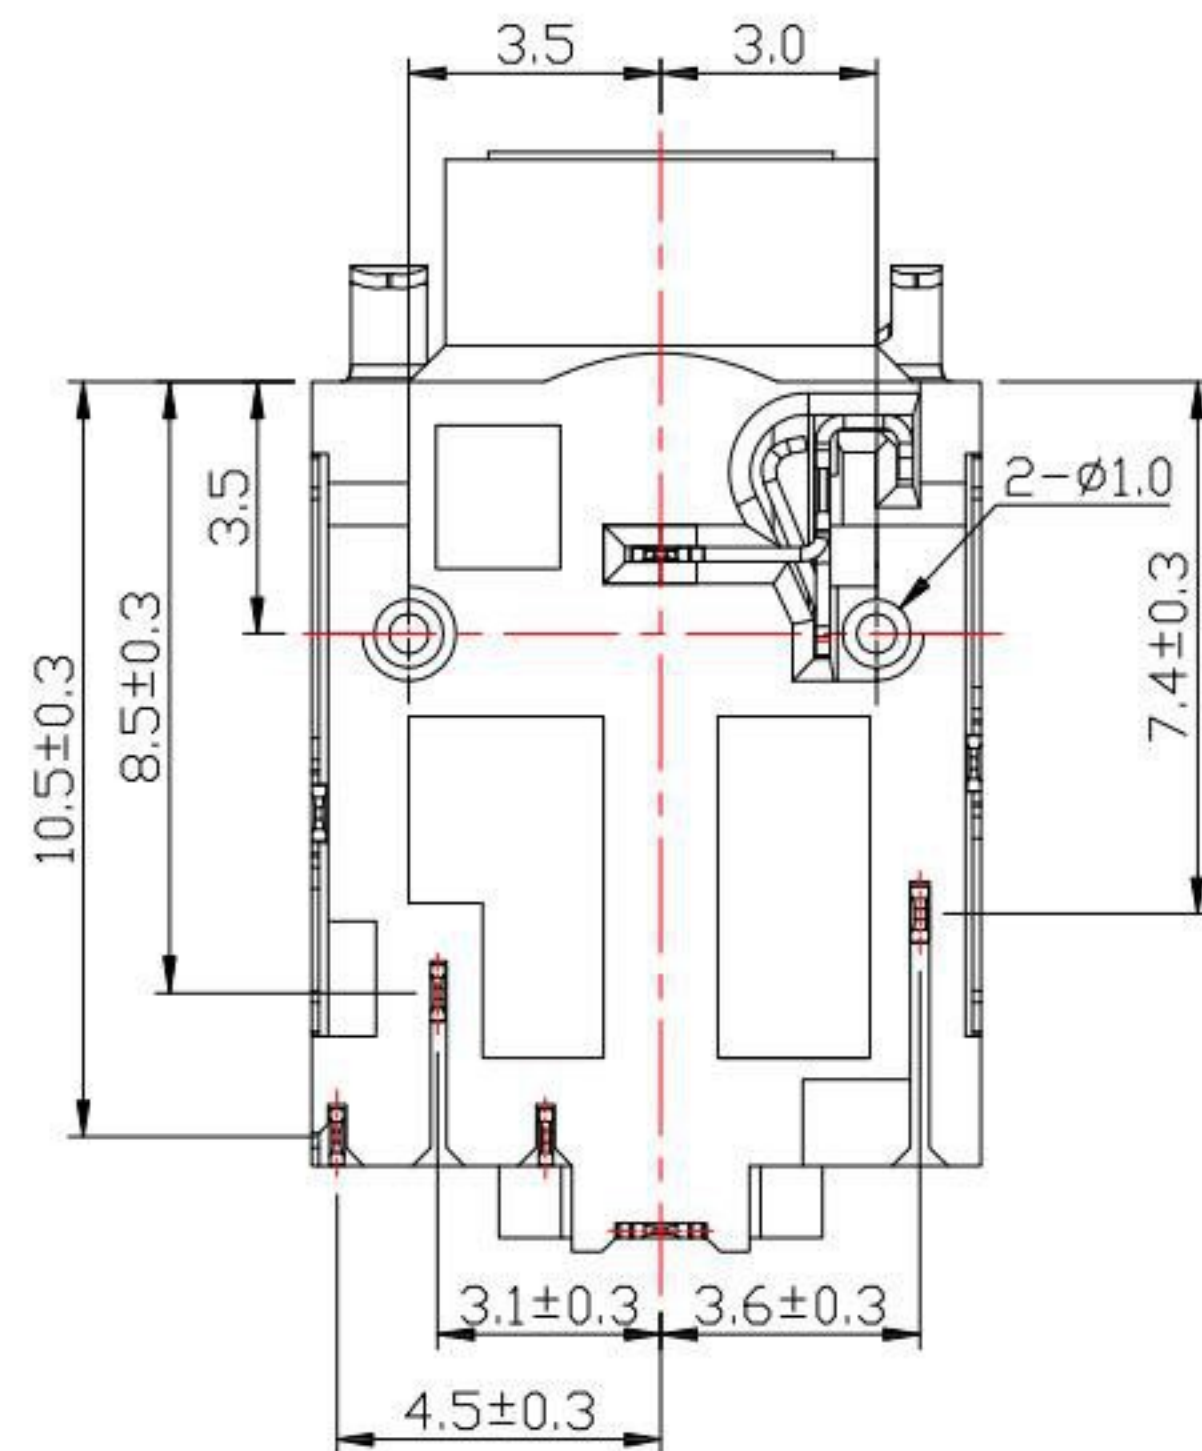


⑨	RING	1	BRASS	Ni-Plating
⑧	SHELL	1	SUS	Ni-Plating
⑦	HOUSING	1	PA9T	
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
⑤	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
④	CURVE PIECE	1	PHOSPHOR BRONZE	Au-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互联网 零组件 制造企业

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 08/27/21

CHECKED BY: DATE

Jacky Chen 08/27/21

APPROVED BY: DATE

Tony Kao 08/27/21

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

PHONE JACK

PJ-D3242K-S124

PJ-D3242K-S124

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE