
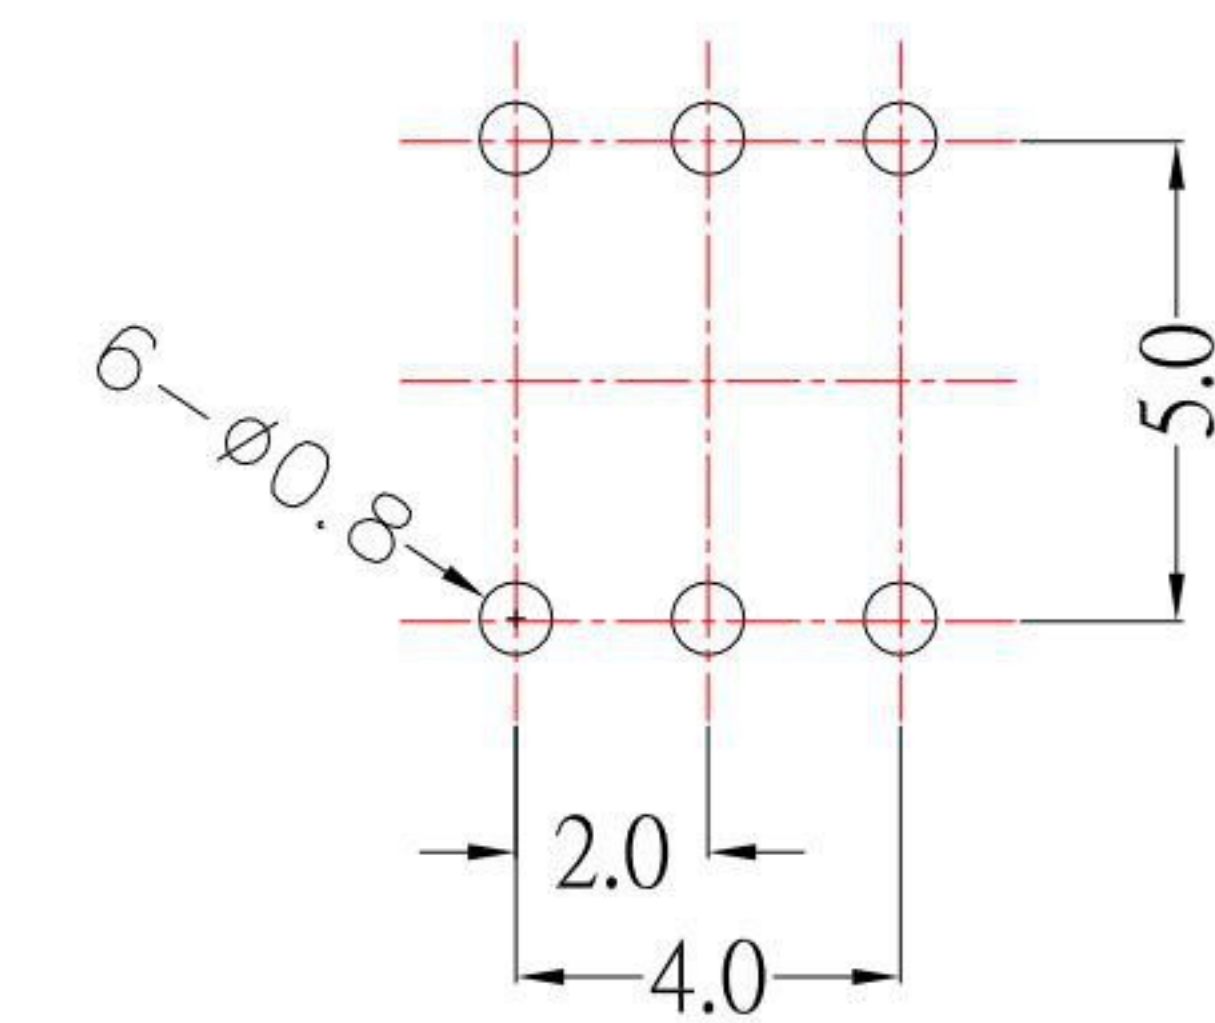
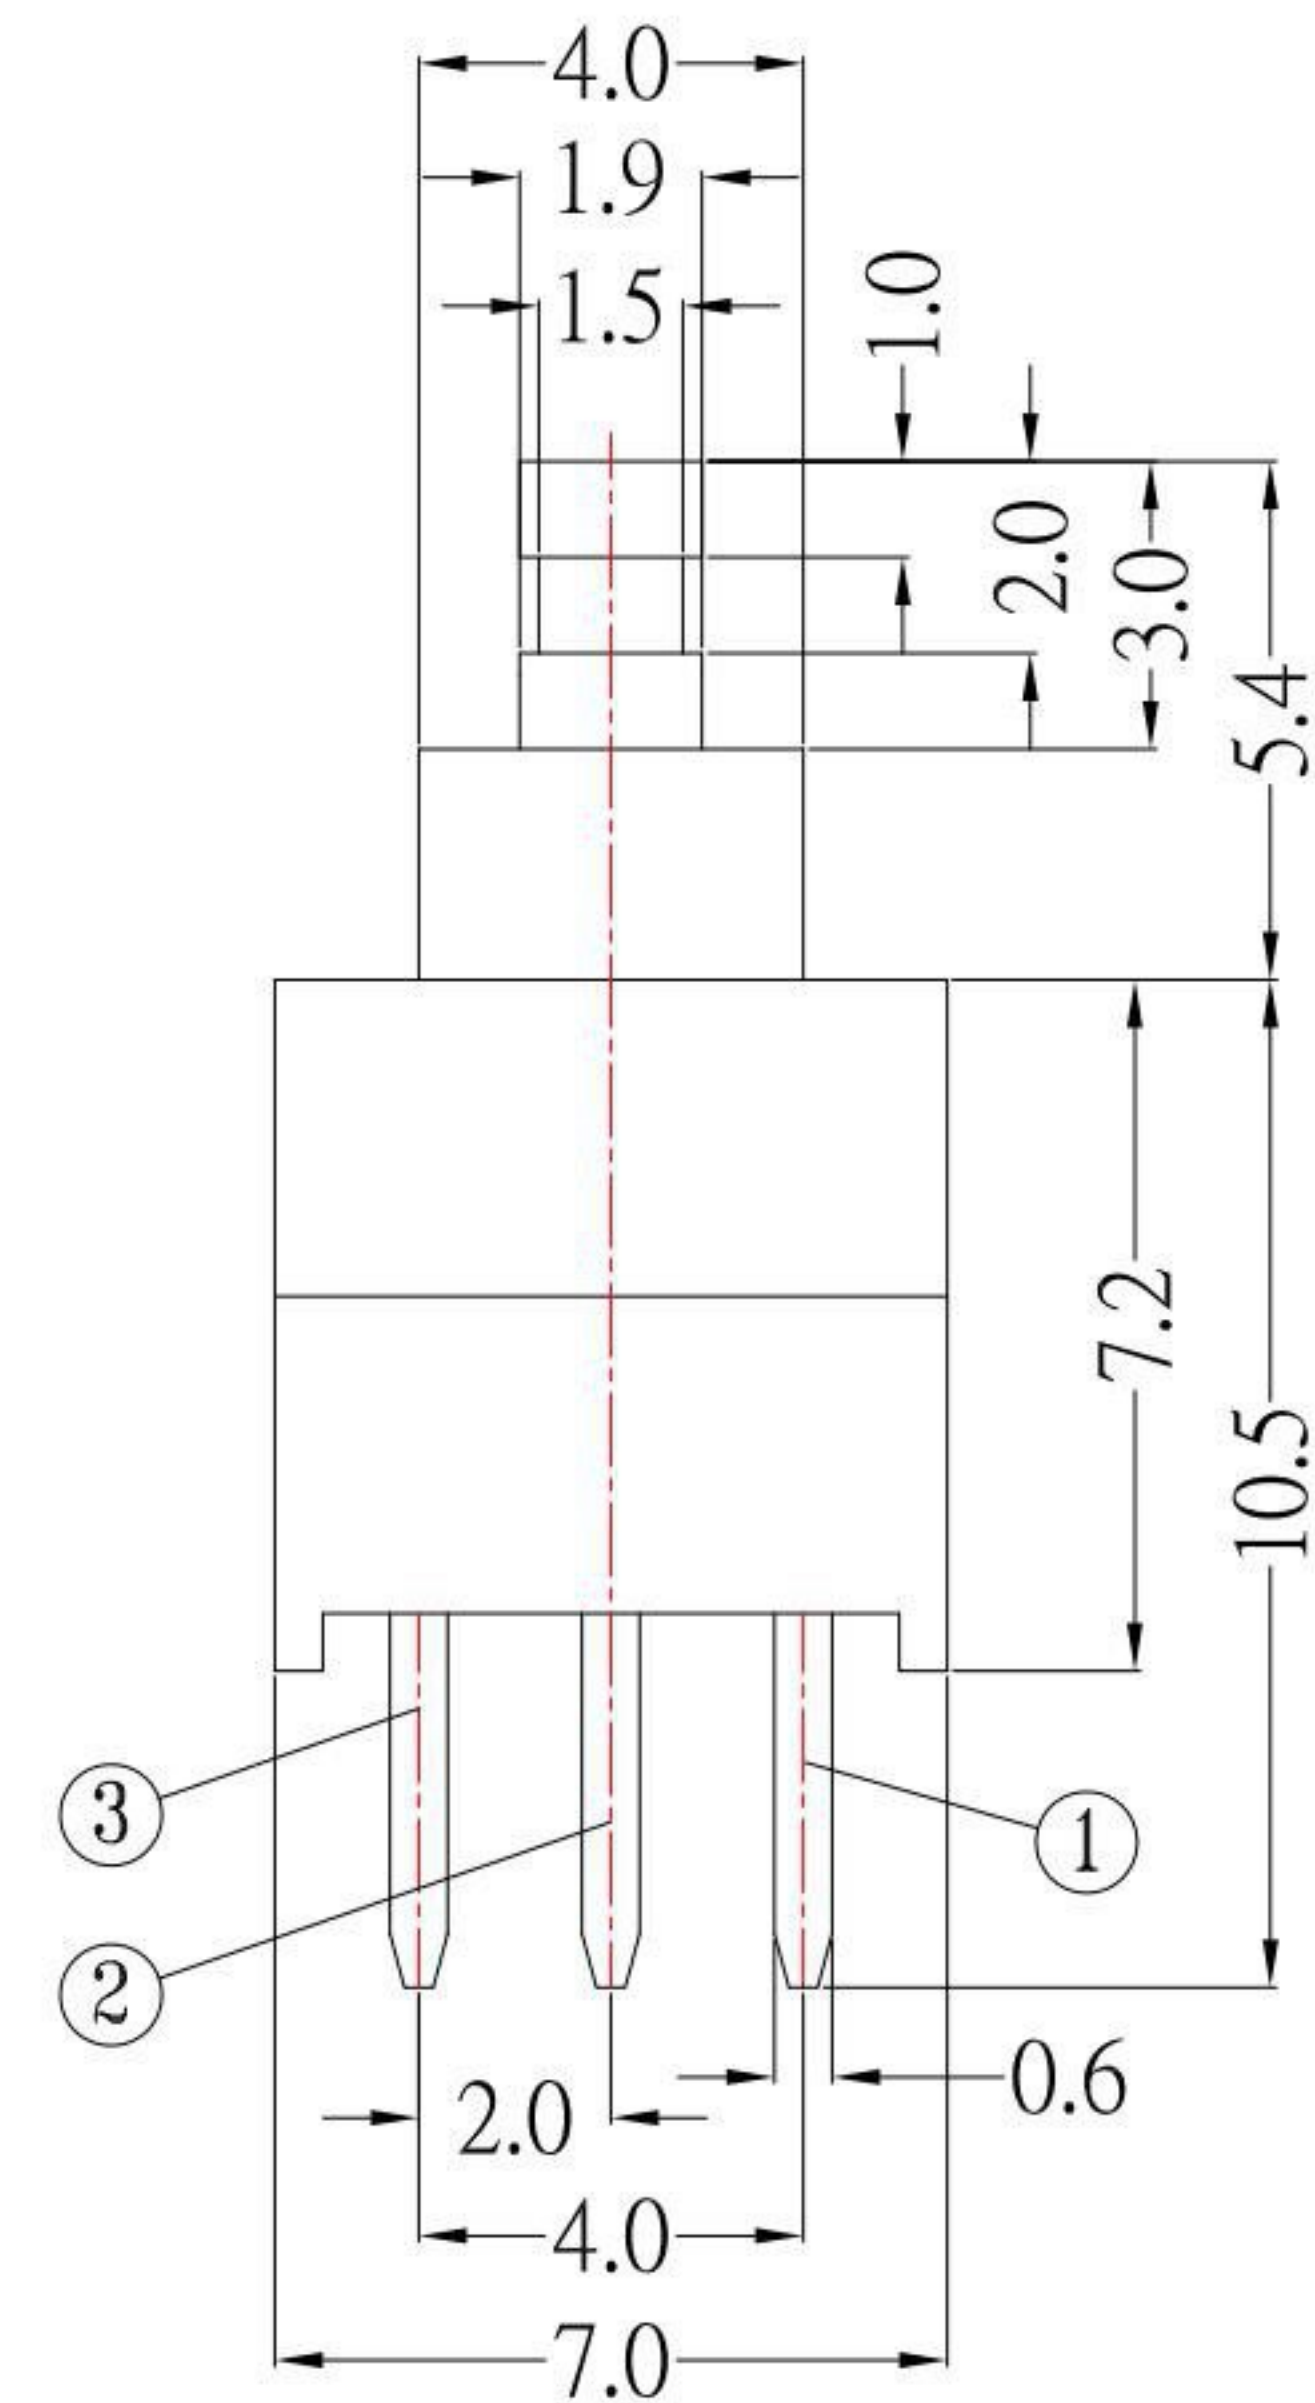


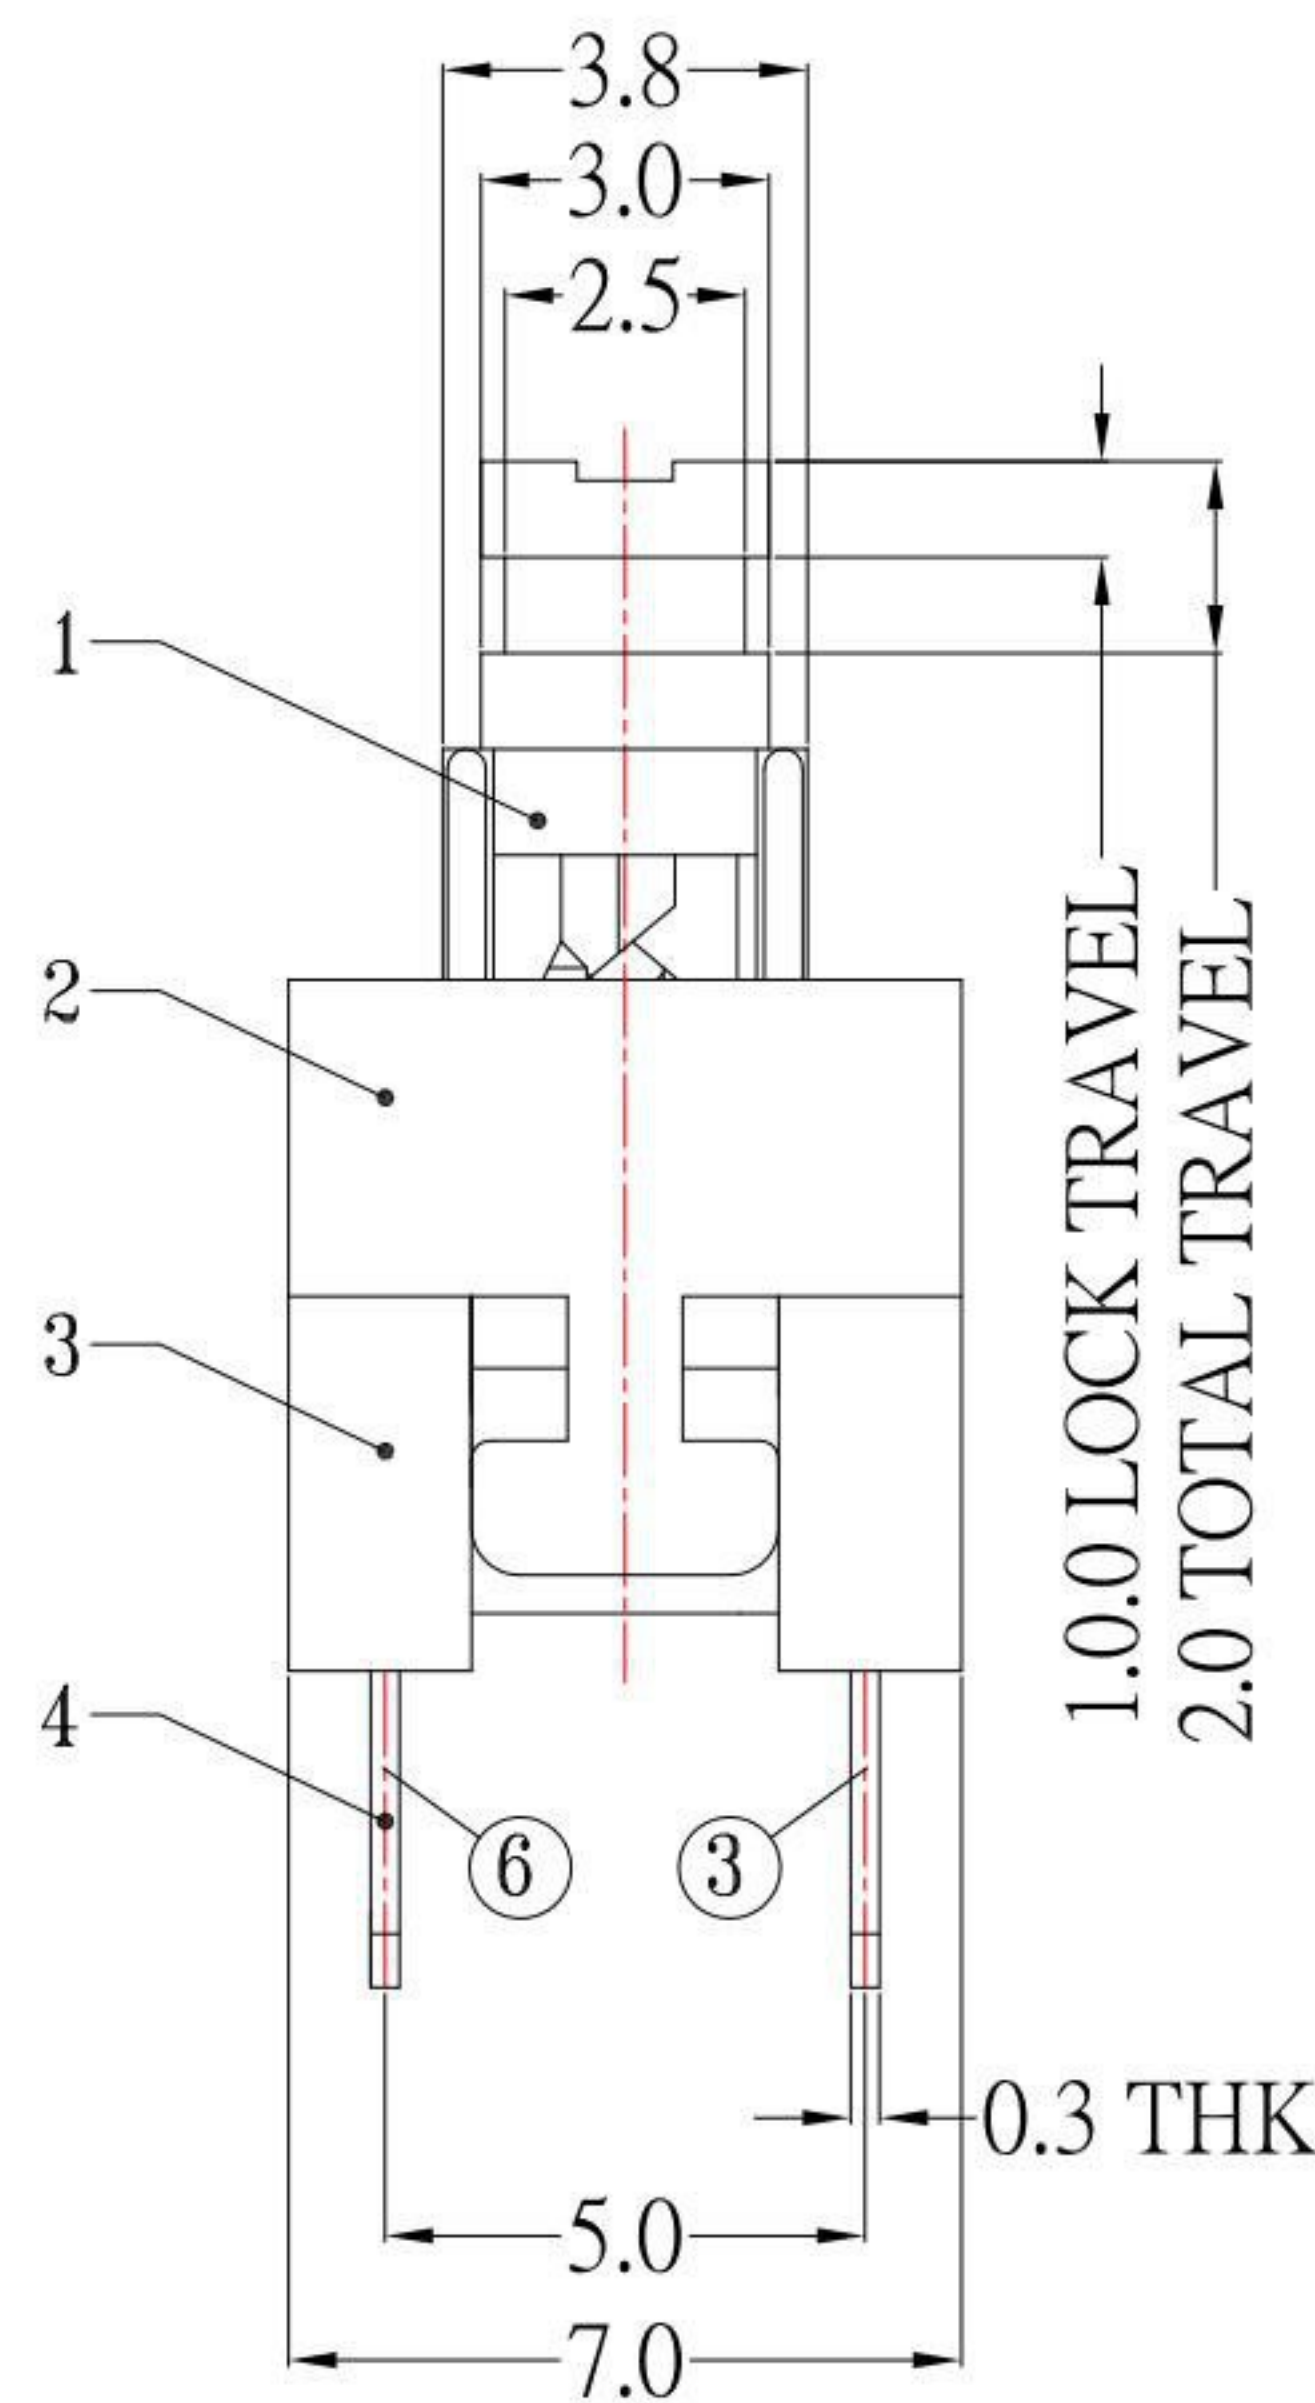


P.C.B MOUNTING PATTERN

SPECIFICATIONS

NOTE:

- 1. PS-D12L-S191: SELF-LOCK
- 2. PS-D12NL-S191:NON-LOCK
- 1.Rating : DC 30V 0.1A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100 gf
- 5.Life test : 10,000 cycles

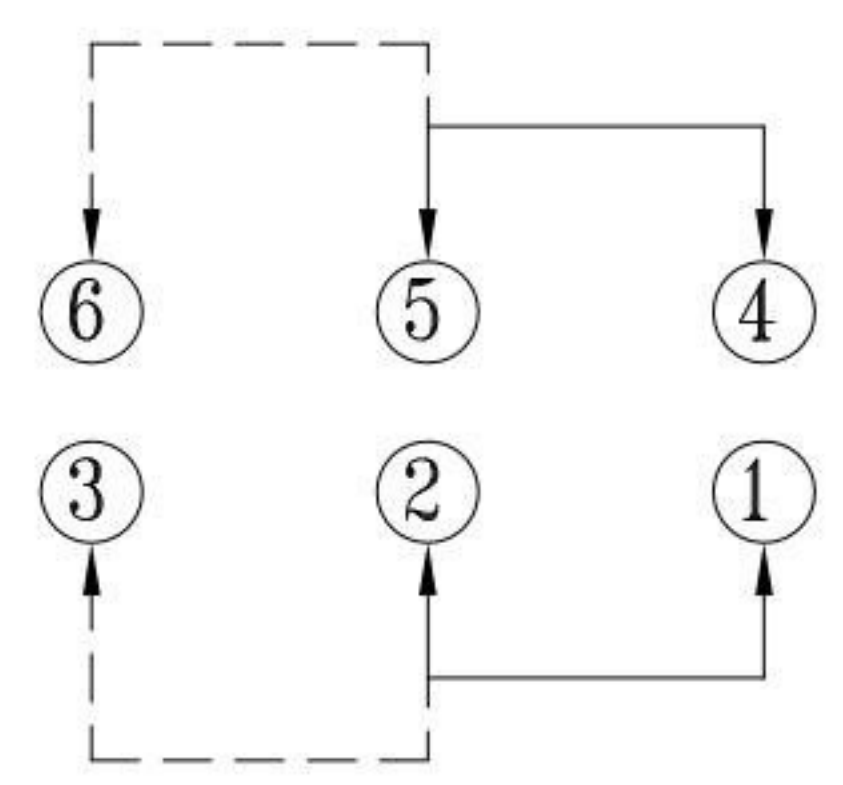

SCHEMATIC

6	CONTACT(CLIP)	2	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	SUS	
4	TERMINAL	6	BRASS	Ag-Plated
3	CASE	1	PBT	BLACK
2	COVER	1	POM	WHITE
1	KNOB	1	POM	BLUE
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

KSD

科斯达电子科技有限公司

SWITCH CONNECTOR

全球互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

DATE: 04/13/22

MAT'L

TITLE: SWITCH

CHECKED BY: Jacky Chen

DATE: 04/13/22

FINISH

MODLE: PUSH SWITCH

APPROVED BY: Tony Kao

DATE: 04/13/22

SCALE: 1 : 1

DWG NO.: PS-D12x-S191

SHEET NO.: 1 of 1

PART NO.: PS-D12x-S191

5	更新圖面	Jack	041322
4	更新KNOB顏色	Jack	032322
3	更新COPING CASE材質	Jack	032222
2	新增SPEC	Jack	102315
1	新增PIN編號	Jack	101215
ITEM NO.	DESCRIPTION	DRAWN	DATE