



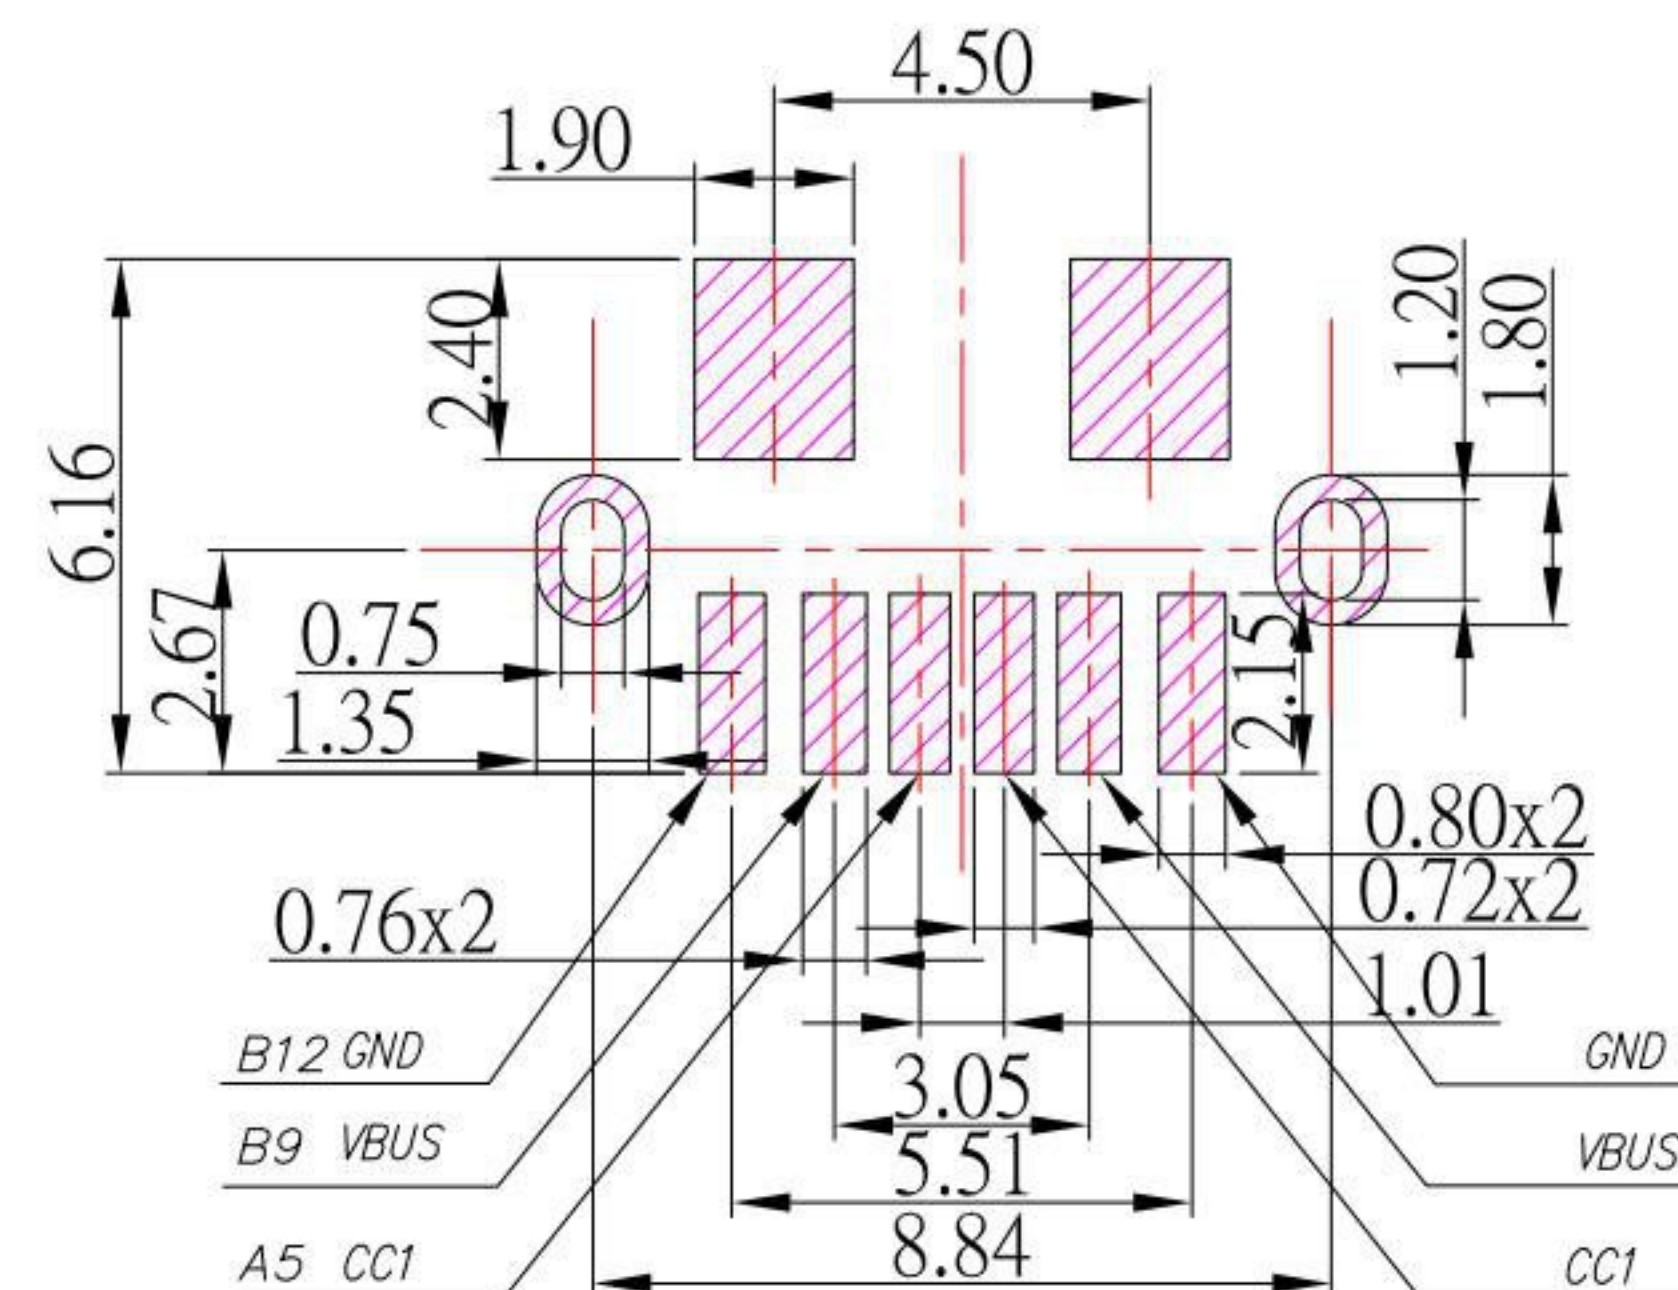

IPX7

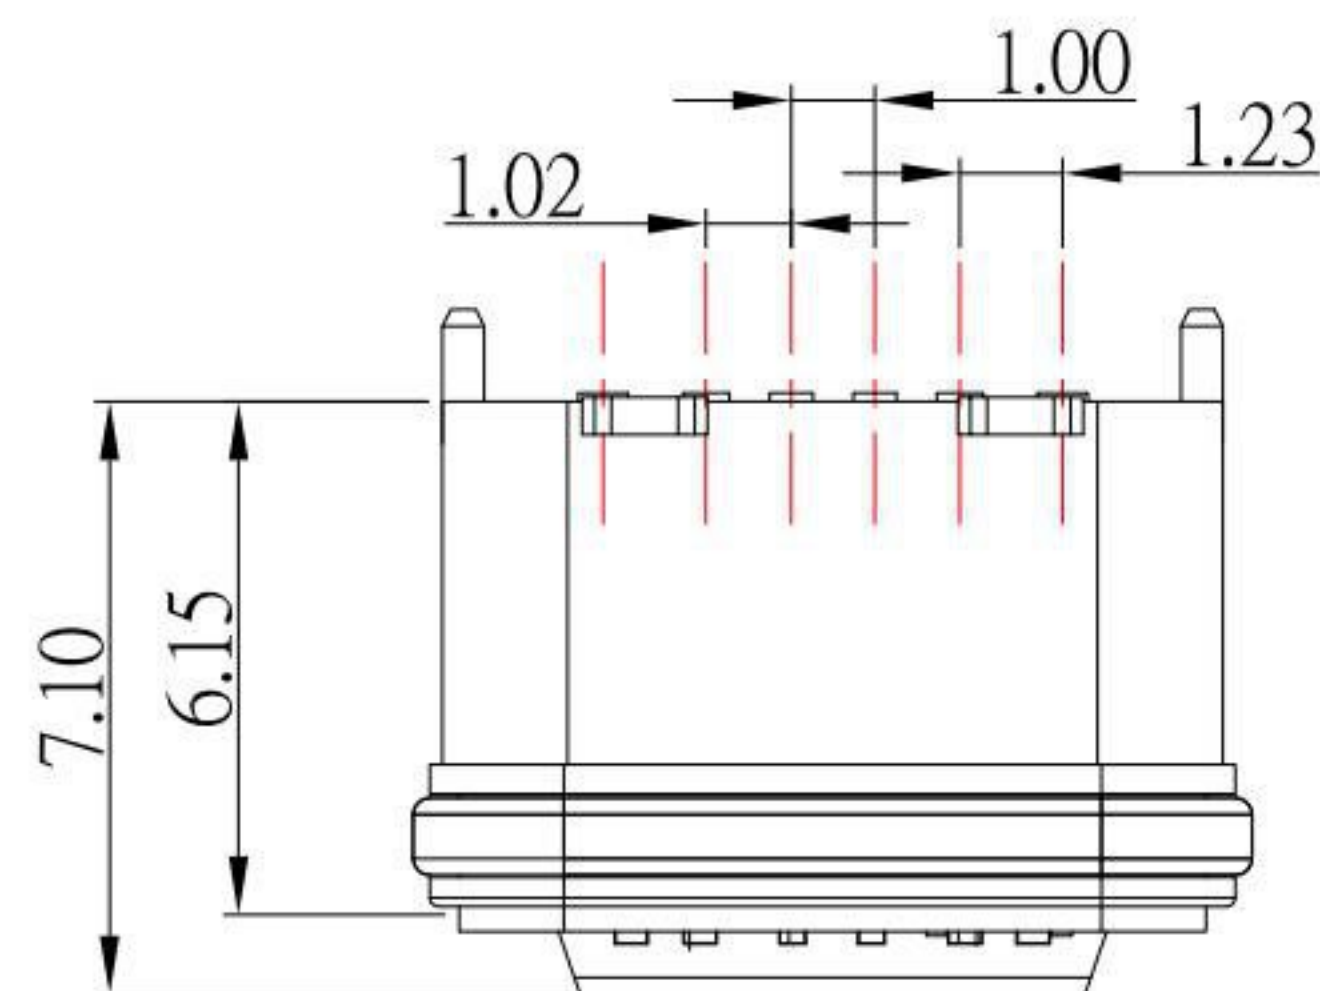

SBC-WP060VS-20x-S347






— 鍍層厚度：

Blank : 1u"

2 : 15u"

3 : 30u"

P.C.B LAYOUT MOUNTING PATTERN

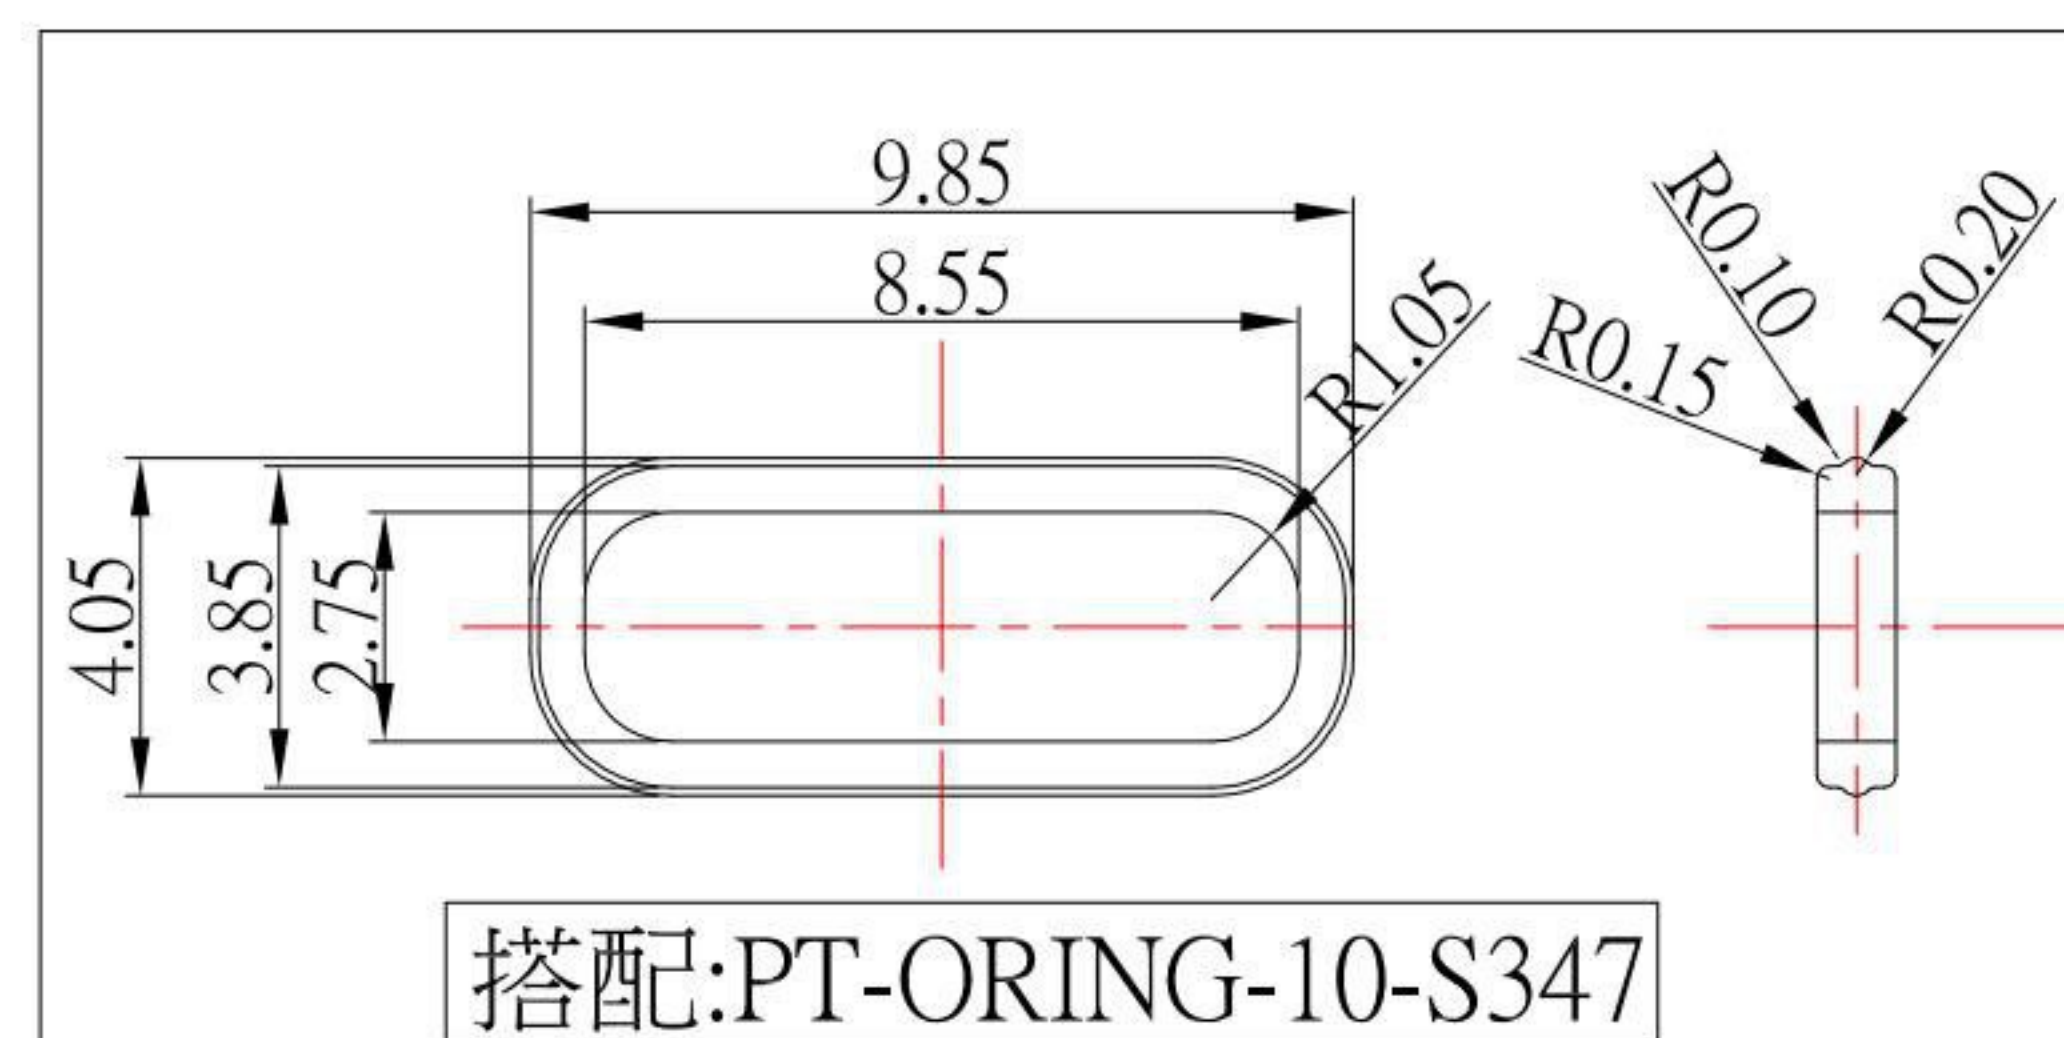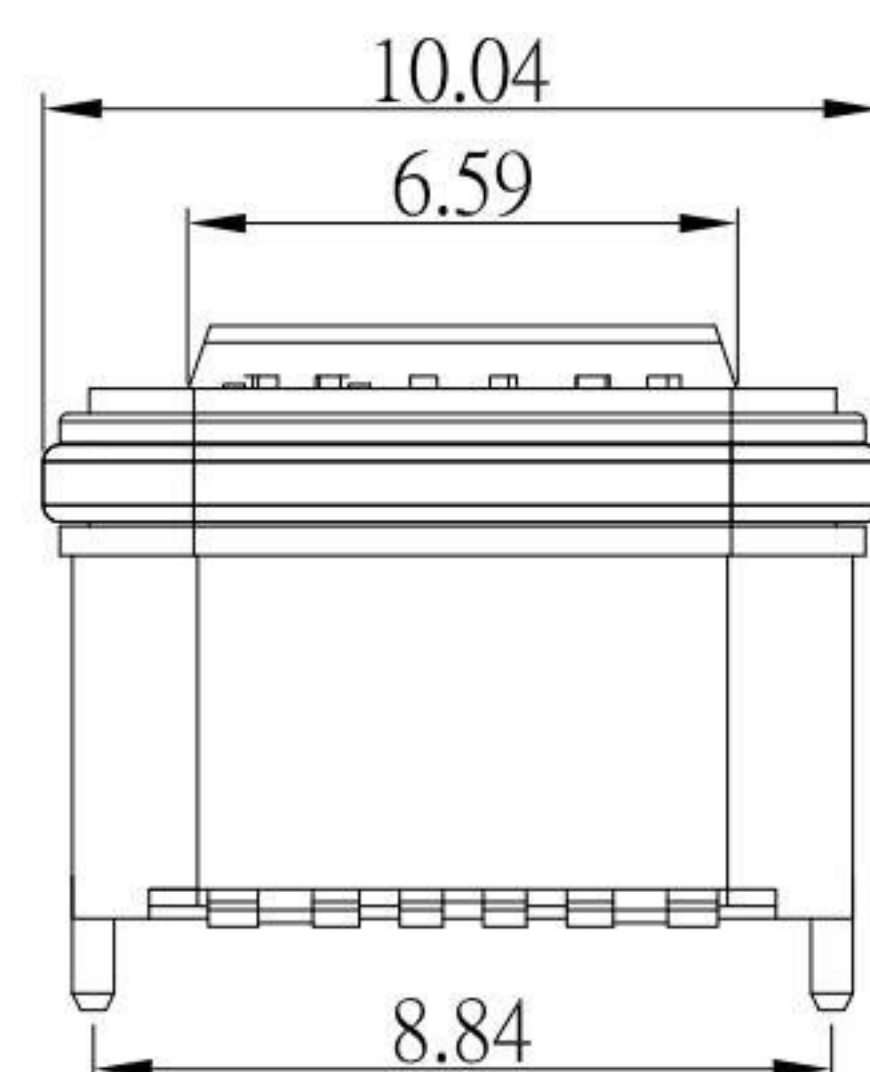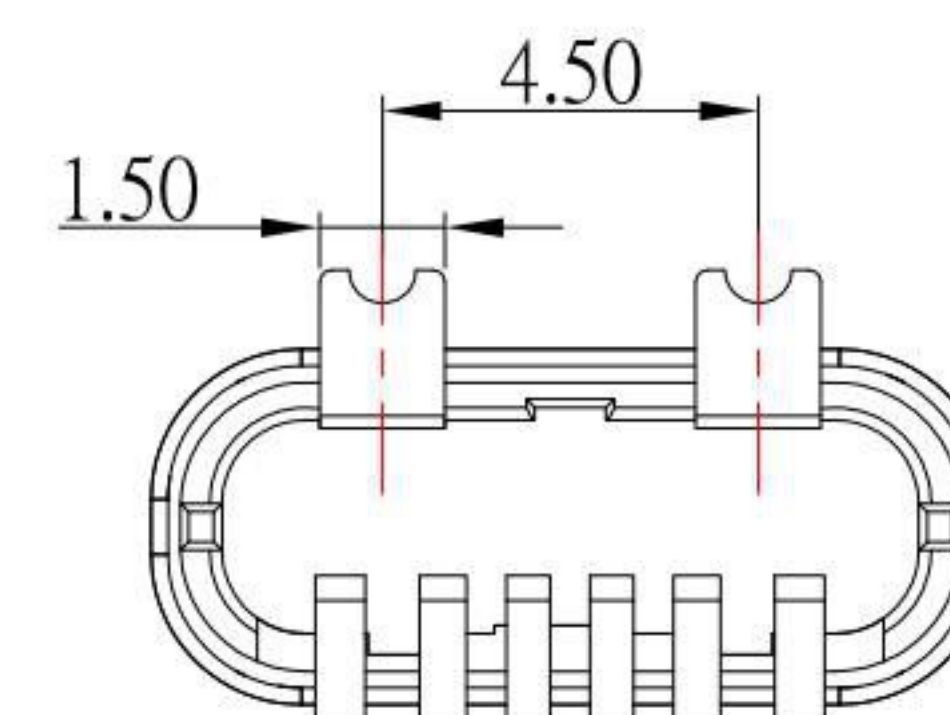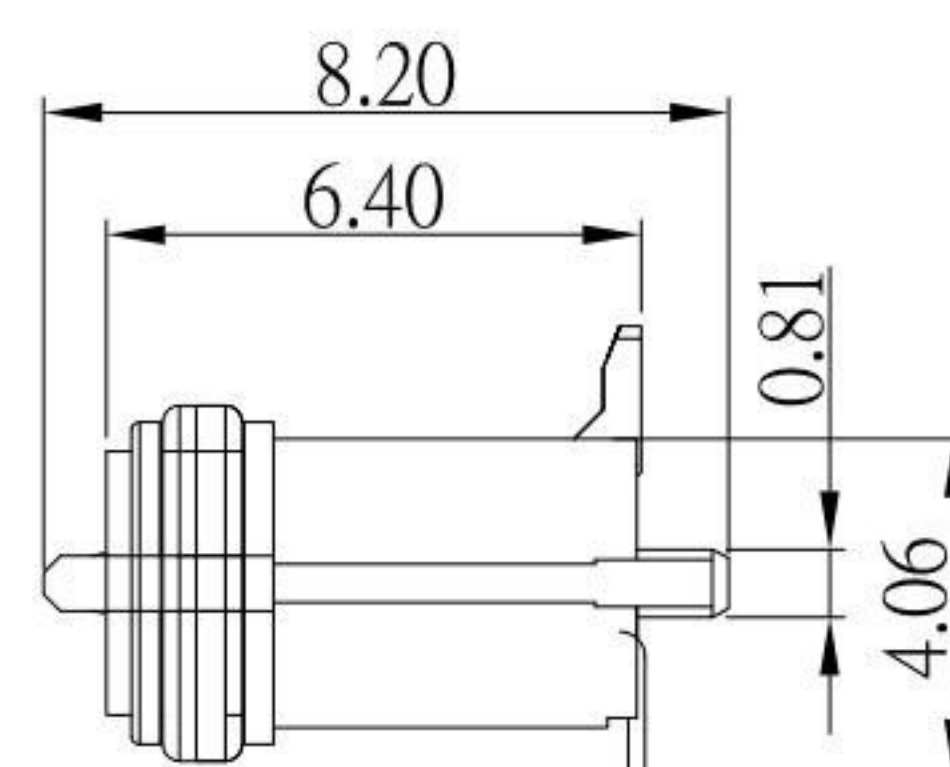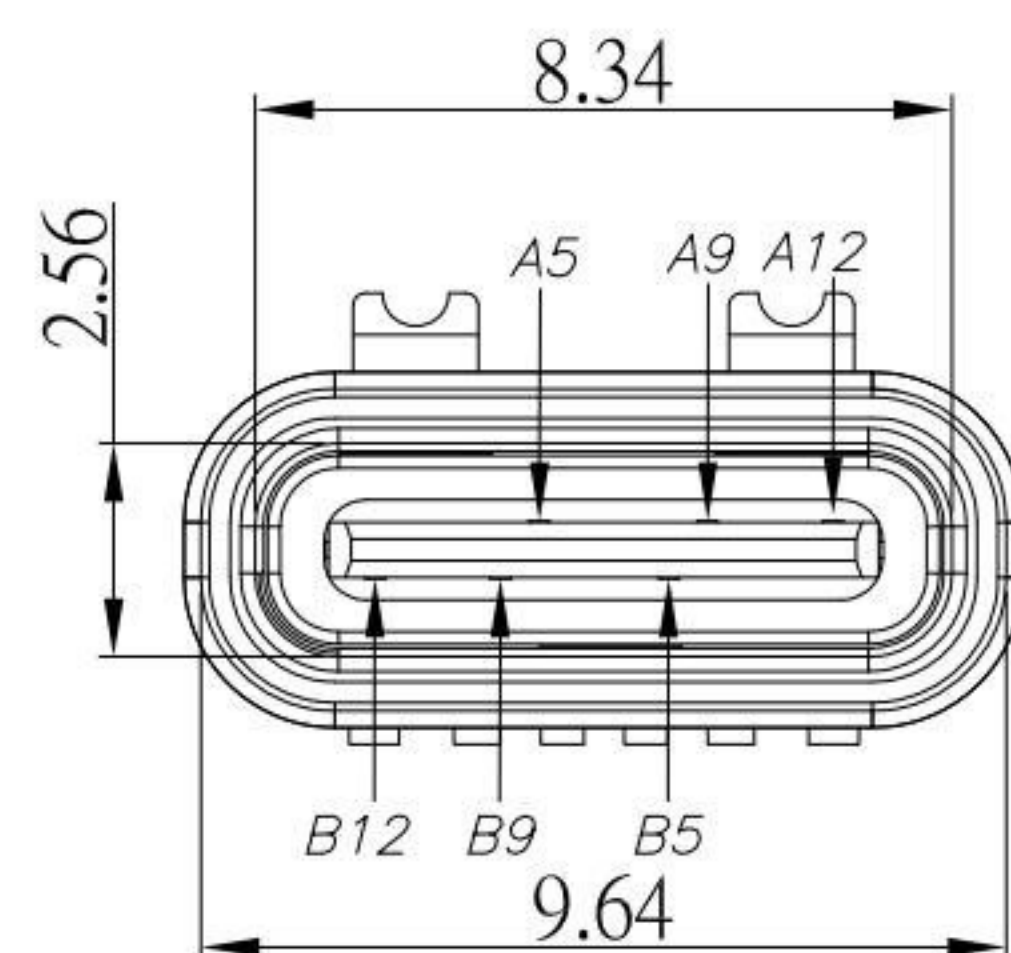

搭配:PT-ORING-10-S347

SPECIFICATIONS

Electrical:

1. Rating: 3.0A
2. Contact Resistance: 40 mΩ Max
3. Insulation Resistance: 100 MΩ Min
4. Dielectric Withstanding Voltage: 100V AC

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Zinc Alloy

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

				KSD 科 斯 达 电 子 科 技 有 限 公 司 SWITCH CONNECTOR 全球互联网组件制造企业 KSD ELECTRONIC TECHNOLOGY Co., LTD	DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	SIZE A4 VER R3		
					Jack Lu06/08/21								
7					CHECKED BY: DATE		FINISH		MODLE	USB C TYPE 2.0 Female 防水型			
3	更新料號	Jack	060821		Jacky Chen	06/08/21							
2	更新PIN定義	Jack	031320	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM	APPROVED BY: DATE	SCALE	1 : 1	DWG NO.	SBC-WP060VS-20x-S347
1	新增防水圈尺寸圖	Jack	121919						Tony Kao				
ITEM NO.	DESCRIPTION	DRAWN	DATE										