




DIMNSIONS

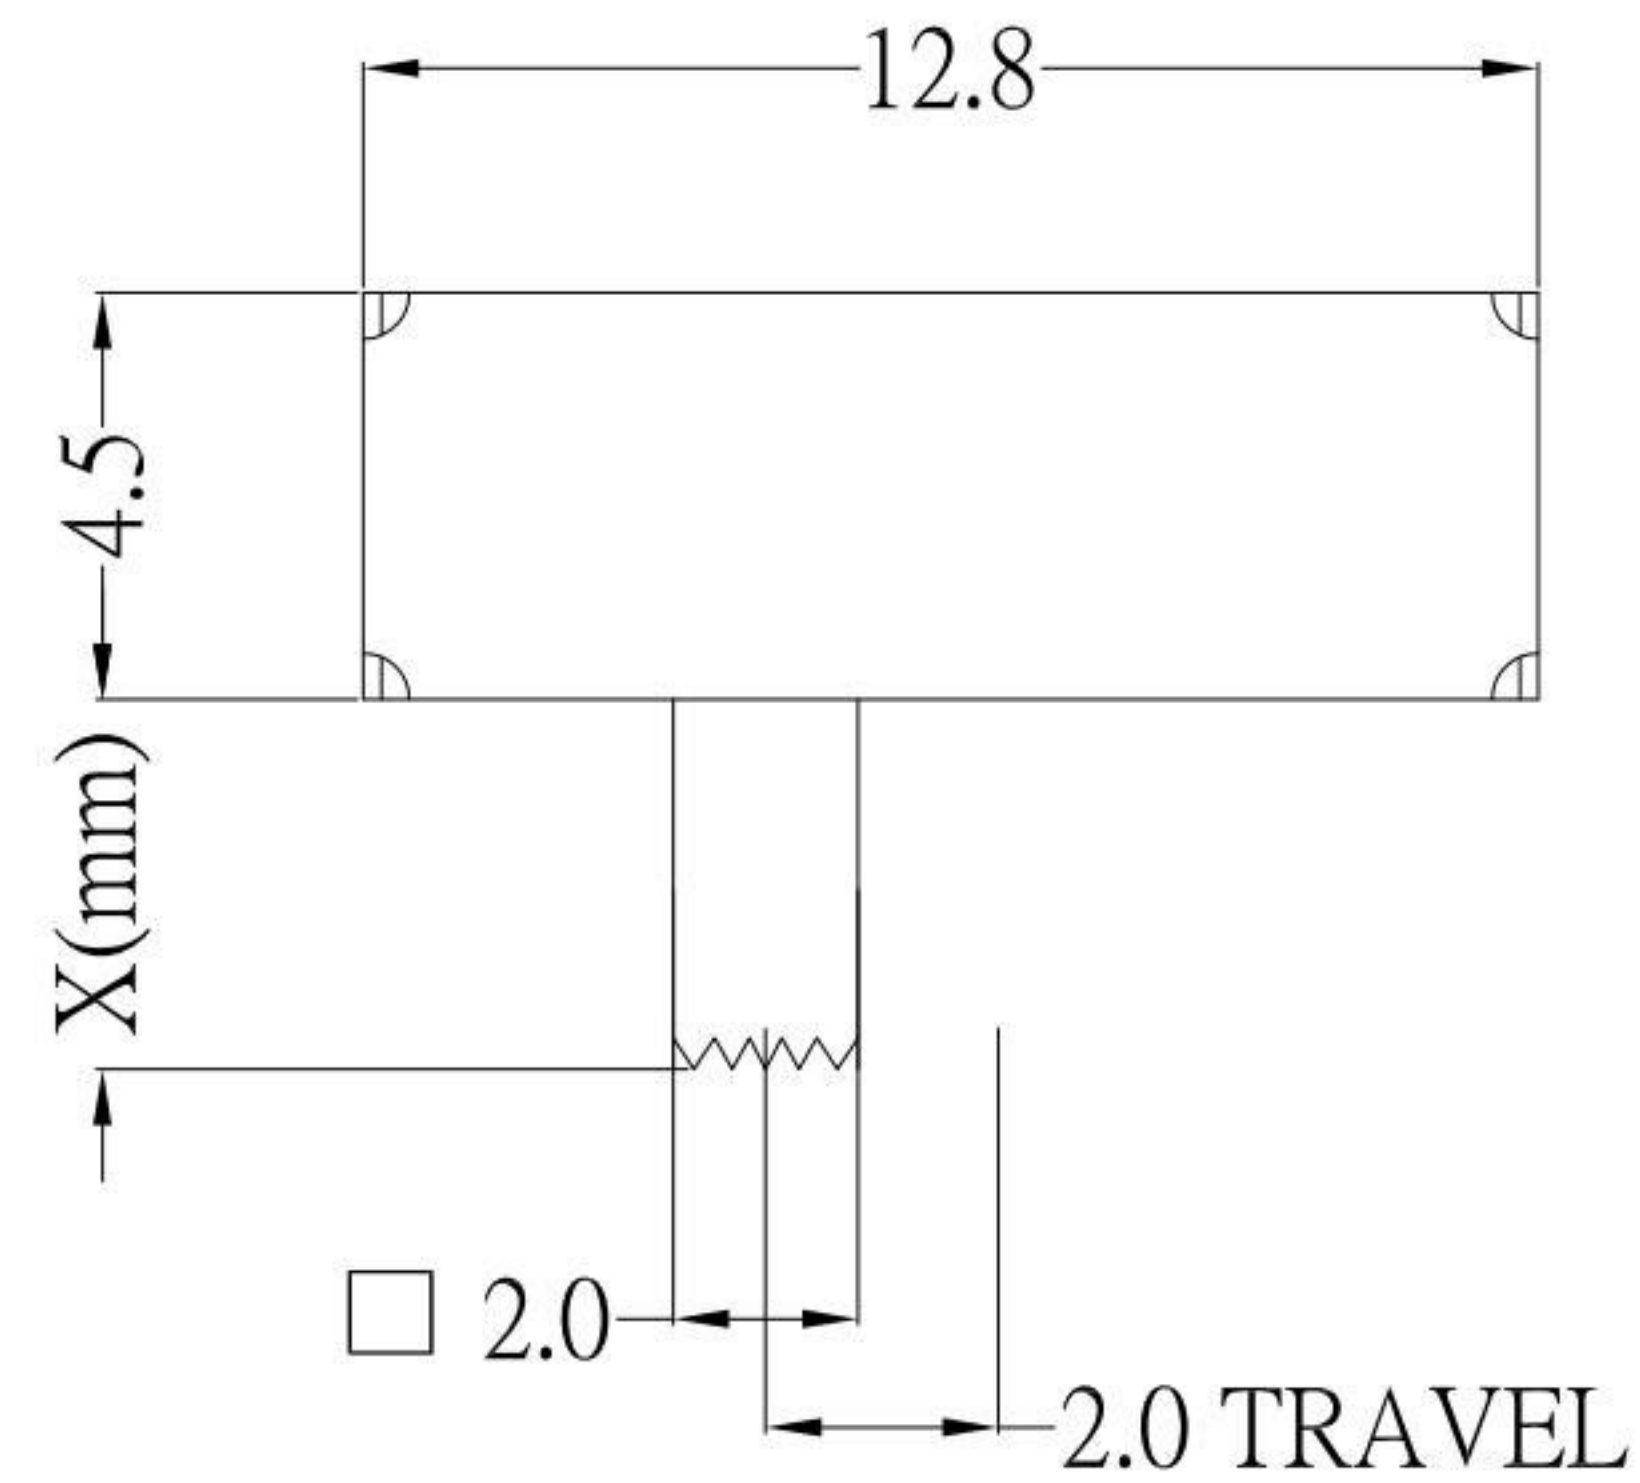

SCHEMATIC

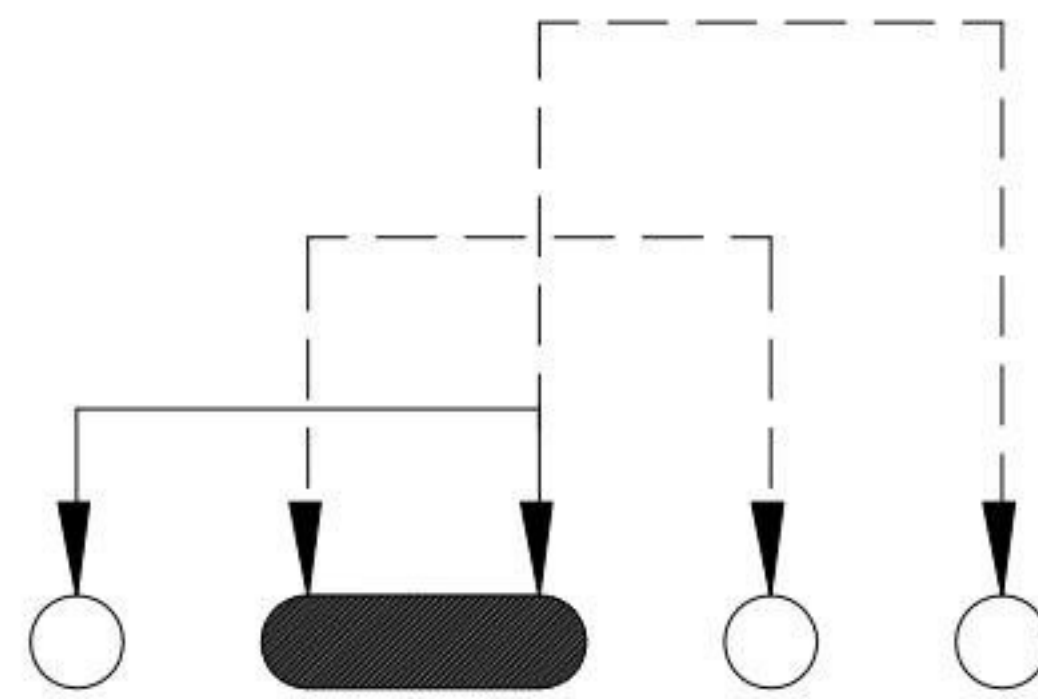



P.C.B MOUNTING PATTERN

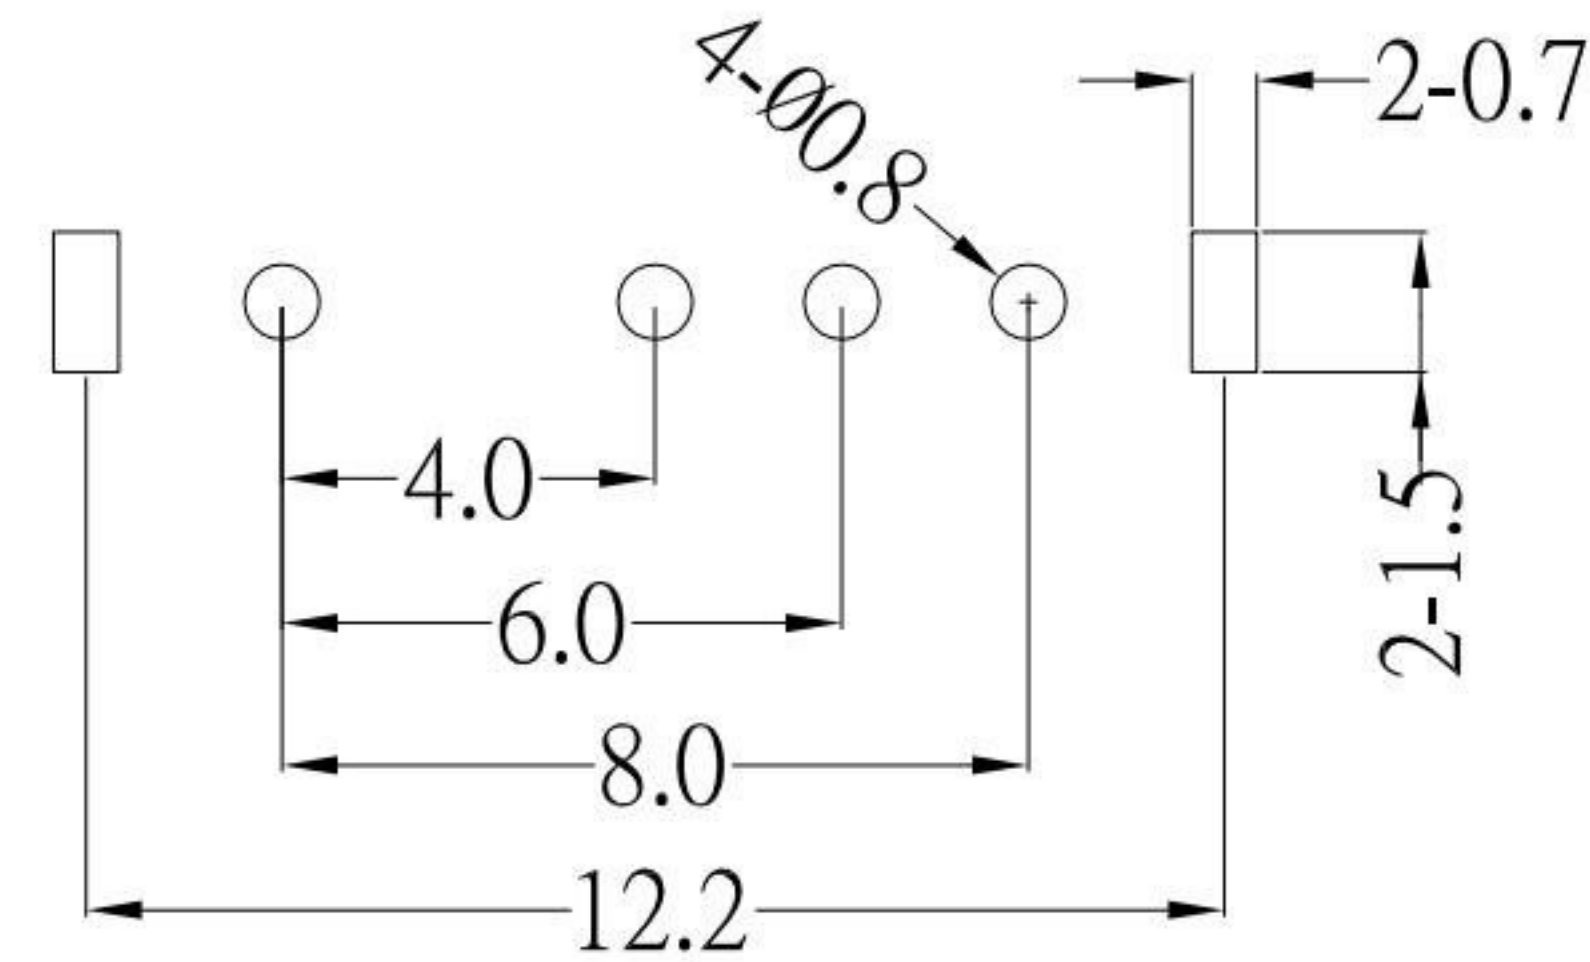

Model No.	X(mm)
SK-13D01-G2	2mm
SK-13D01-G3	3mm
SK-13D01-G4	4mm
SK-13D01-G5	5mm
SK-13D01-G6	6mm
SK-13D01-G7	7mm
SK-13D01-G8	8mm
SK-13D01-G9	9mm

SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	1P - 3T
Timing	Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycles)	10,000

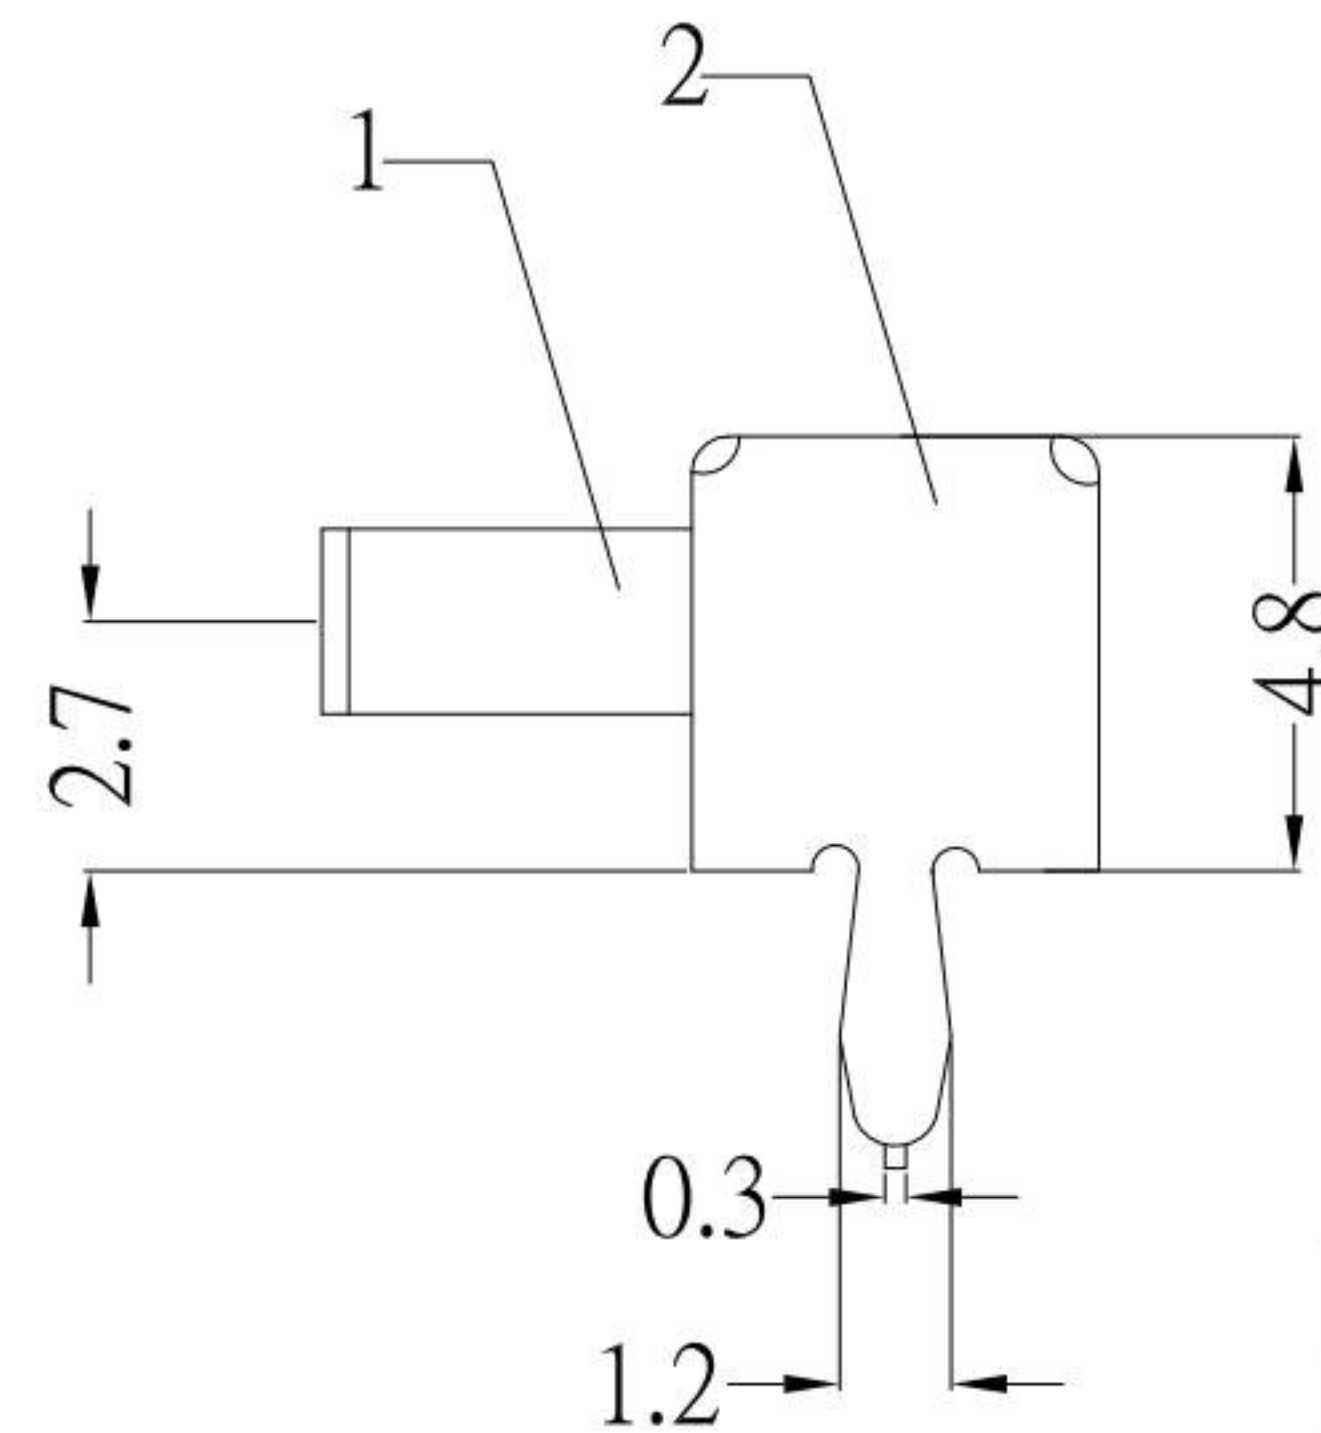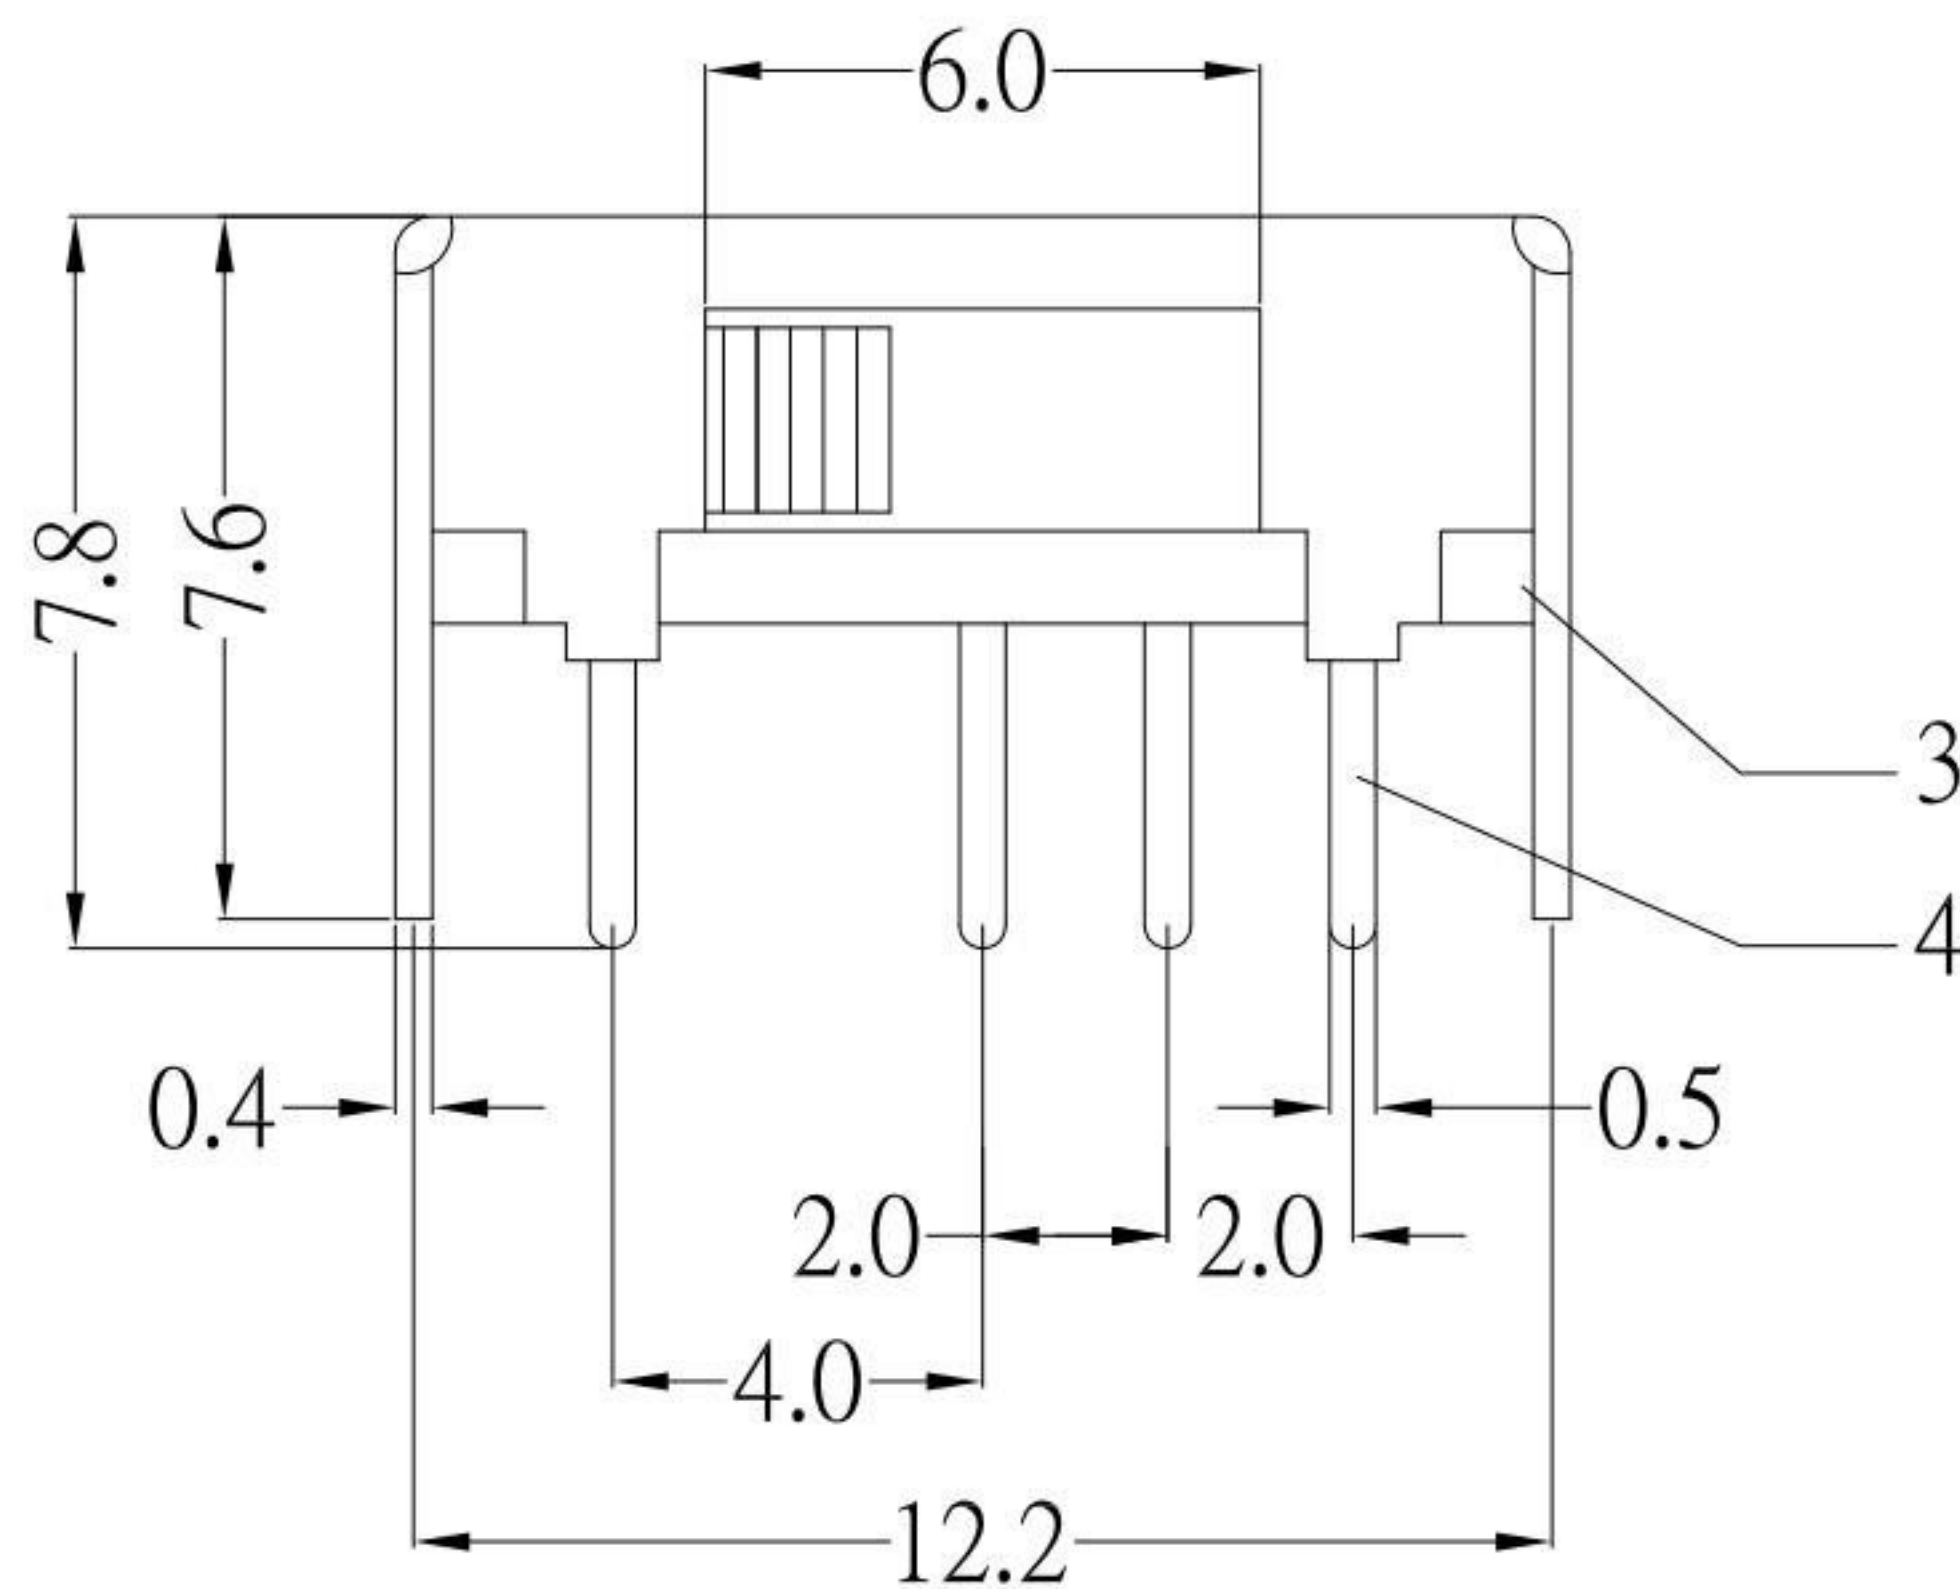


6	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	STAINLESS STEEL	
4	TERMINAL	4	BRASS	Ag-Plated
3	BASE	1	PHENOLIC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互联零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/19/14	FINISH	MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SK-13D01-Gx-S191
Jacky Chen	11/19/14	1 : 1	PART NO.	SK-13D01-Gx-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	11/19/14			

3	更新Contact Resistance	Jack	111914
2	更新為A0版	Jack	091114
1	更新材質及鍍層	Jack	060313
ITEM NO.	DESCRIPTION	DRAWN	DATE