


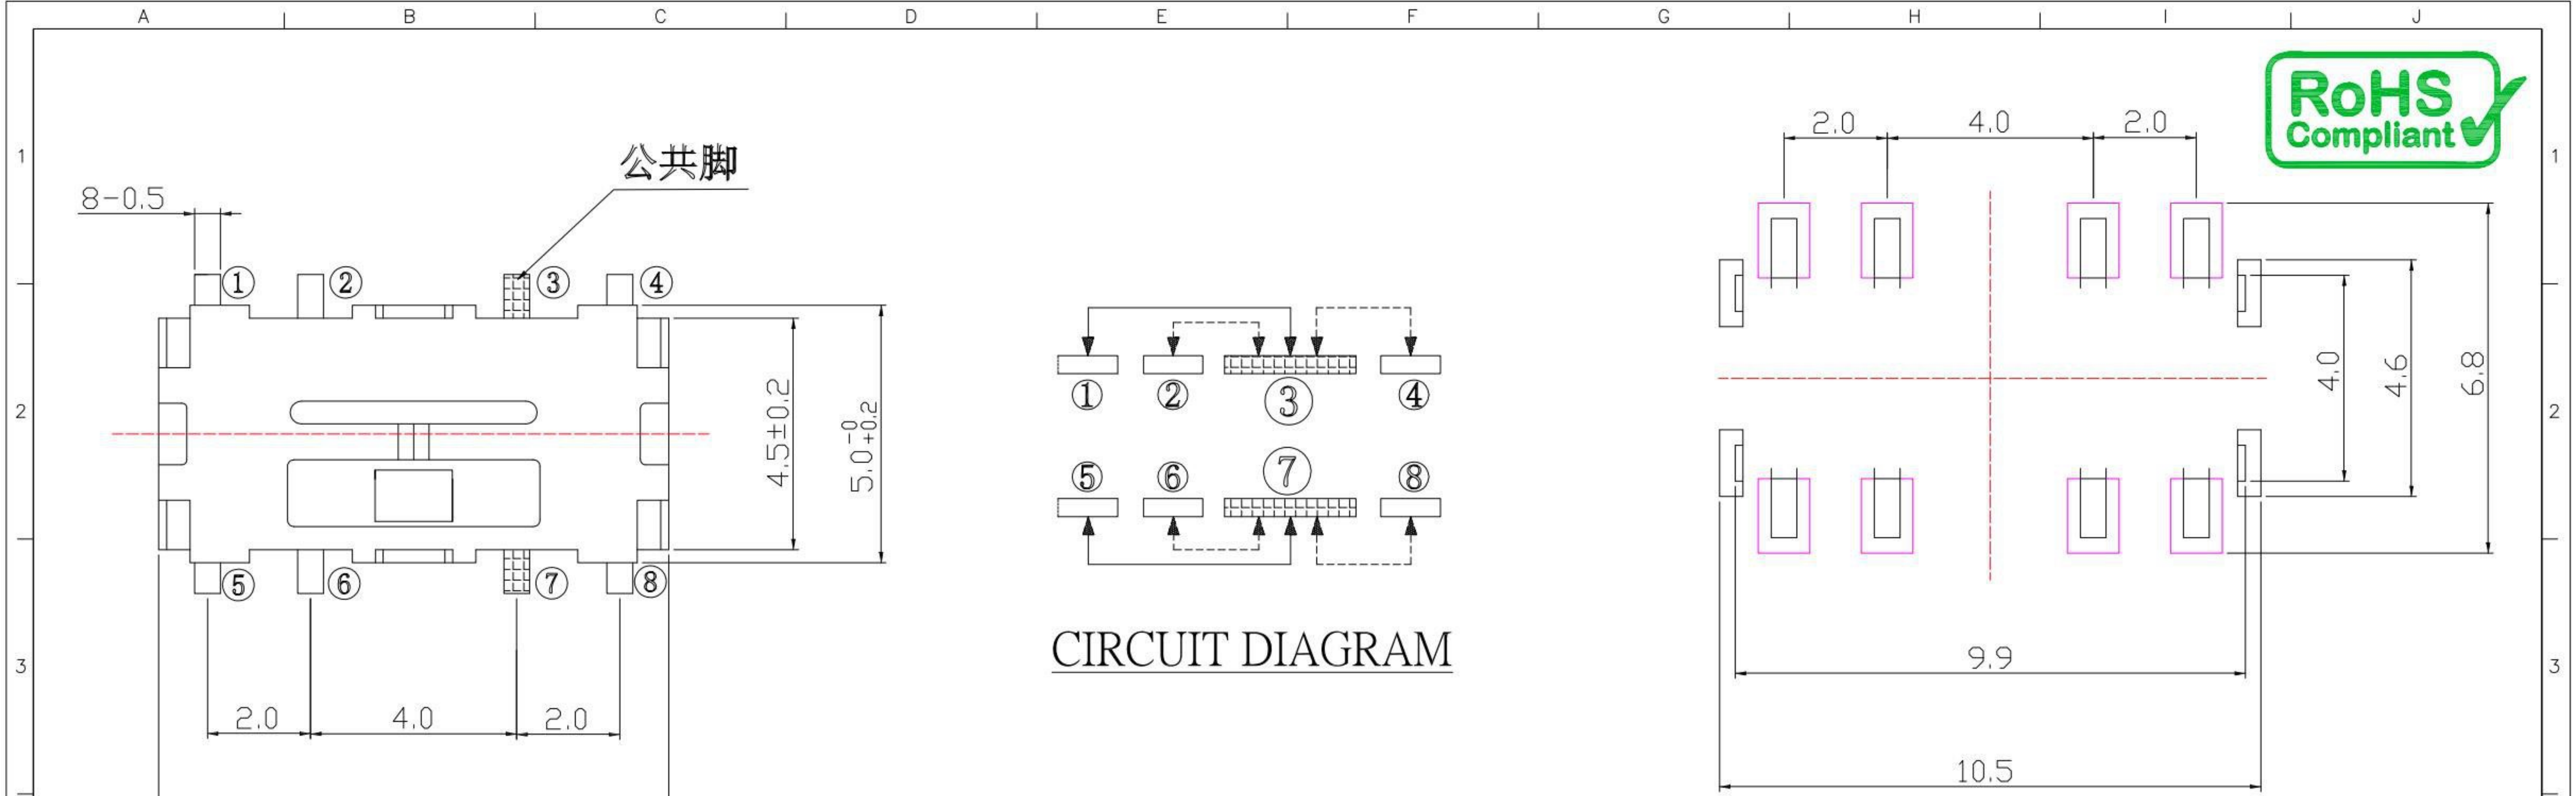

CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	50mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

E	CLIP	2	PHOSPHOR BRONZE	Ag plated
D	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
C	BASE	1	PA6T(White)	
B	COVER	1	SUS	Ni plated
A	SLIDER	1	PA46(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

1

更新圖面

Jack

072721

ITEM NO.

DESCRIPTION

DRAWN

DATE

KSD

科斯达电子科技有限公司

SWITCH CONNECTOR

全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE 07/27/21

DATE 07/27/21

DATE 07/27/21

MAT'L

FINISH

SCALE 1 : 1

SHEET NO. 1 of 1

TITLE SWITCH

MODLE SLIDE SWITCH 2P3T W/I GROUND TERMINAL

DWG NO. SS-C95GB-S246

PART NO. SS-C95GB-S246

SIZE A4

VER R1