

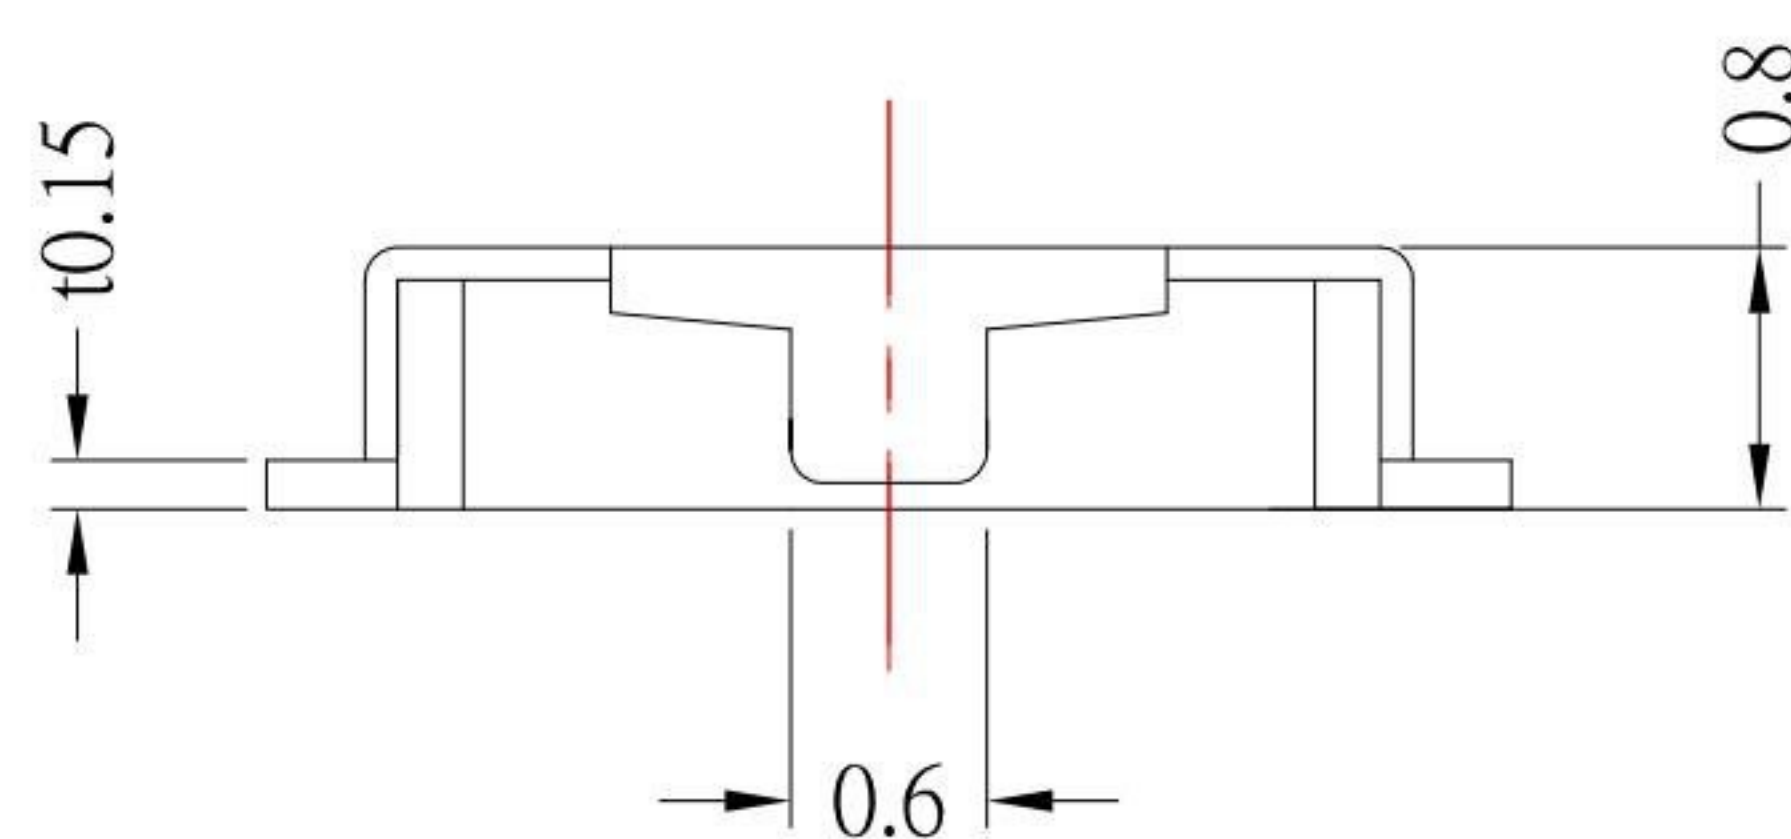
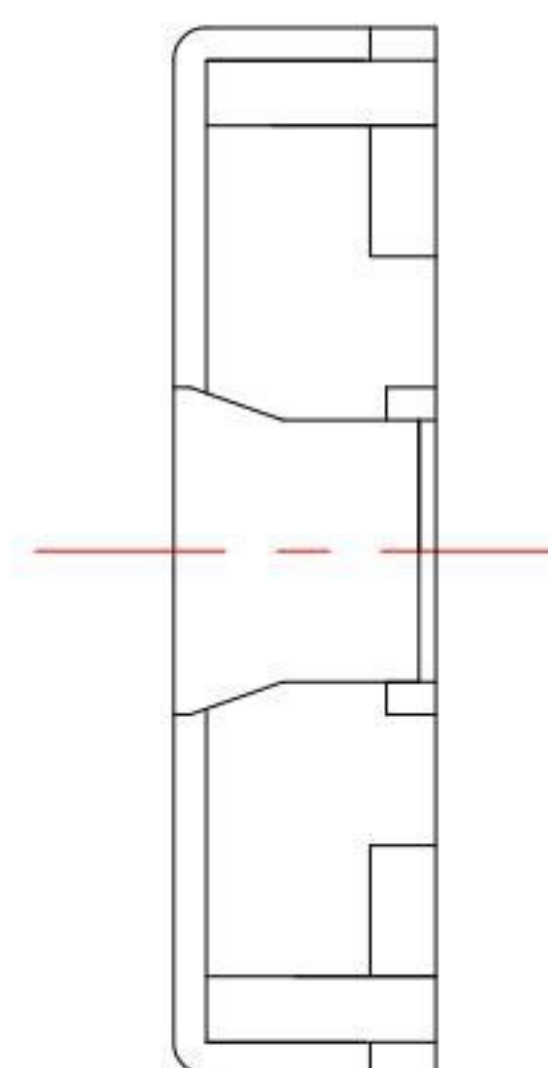



## DIMENSIONS

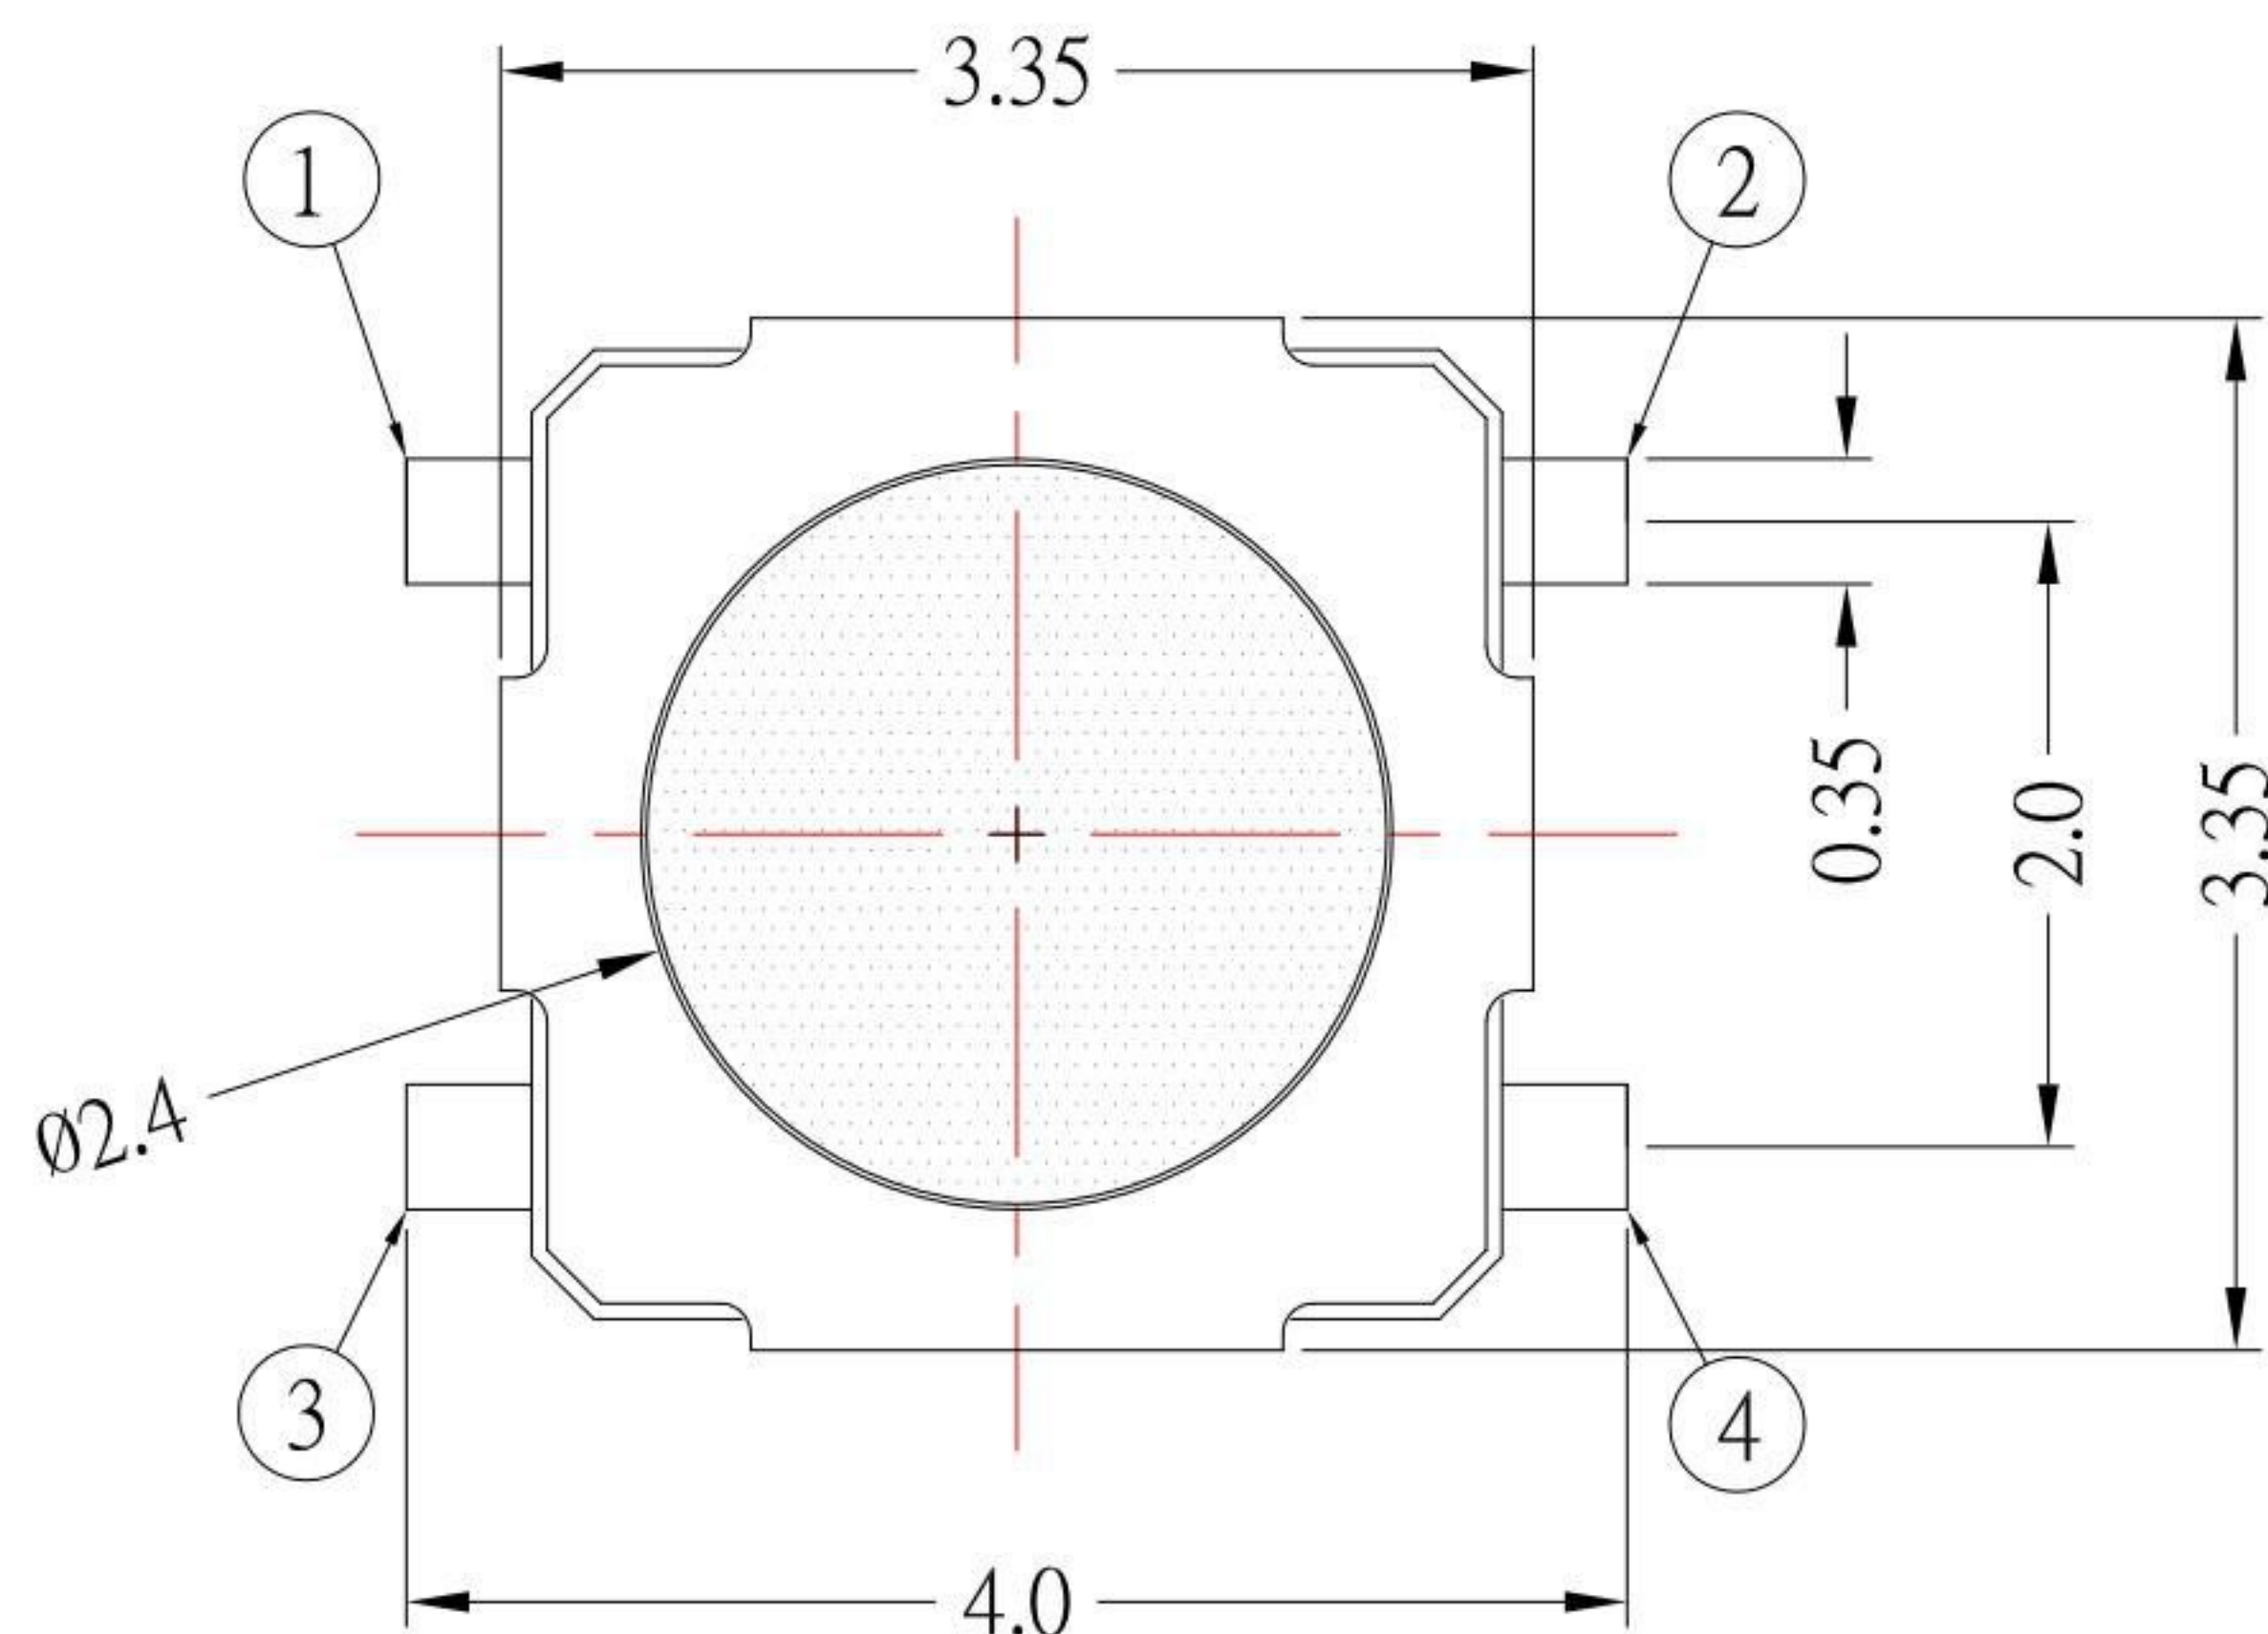

## CIRCUIT DIAGRAM

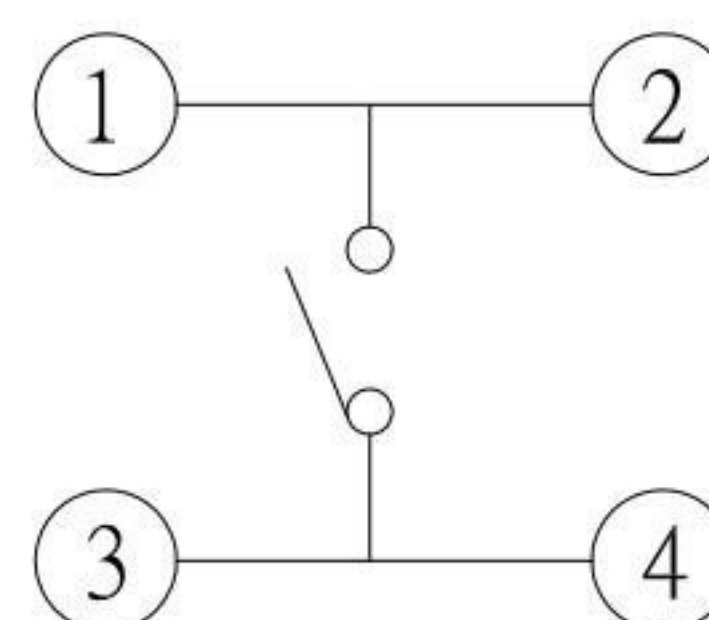

## P.C.B LAYOUT MOUNTING PATTERN

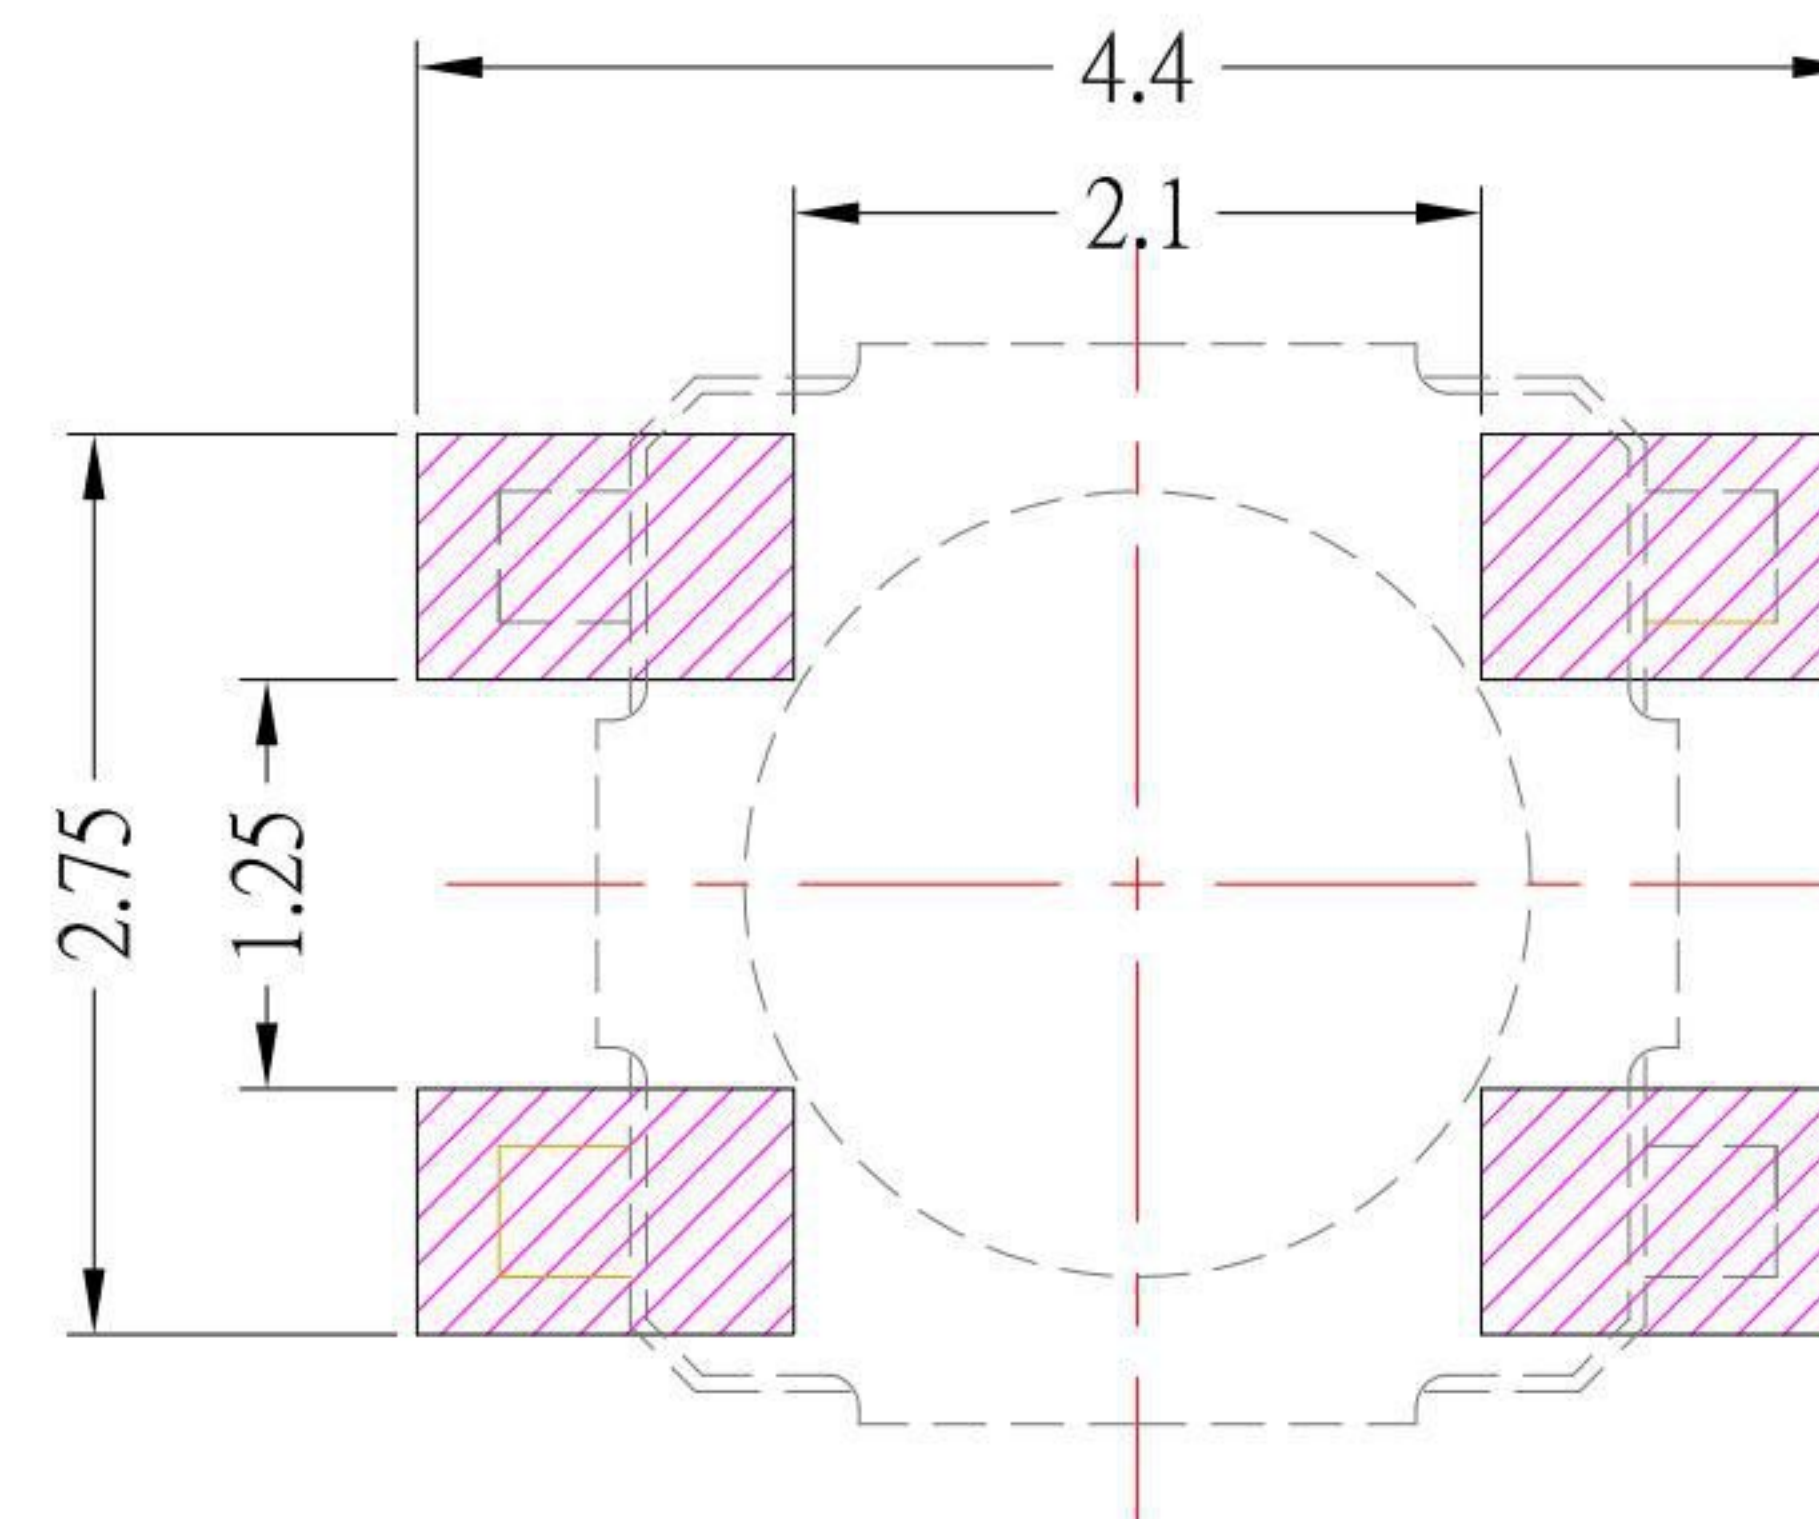


## SPECIFICATIONS

|                         |                  |            |
|-------------------------|------------------|------------|
| Rating                  | DC 12V 50mA Max. |            |
| Contact Resistance      | 100mΩ Max.       |            |
| Travel                  | 0.15 ± 0.1mm     |            |
| Operating Force         | 2:160±50gf       | 3:260±50gf |
| Operating Life (cycles) | 100,000          |            |

**KSD** 科斯达电子科技有限公司  
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
全球互联网组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Frank Wu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 06/26/12  
DATE: 06/26/12  
DATE: 06/26/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-307PF-x-S126

TS-307PF-x-S126

SIZE  
A4  
VER  
A