
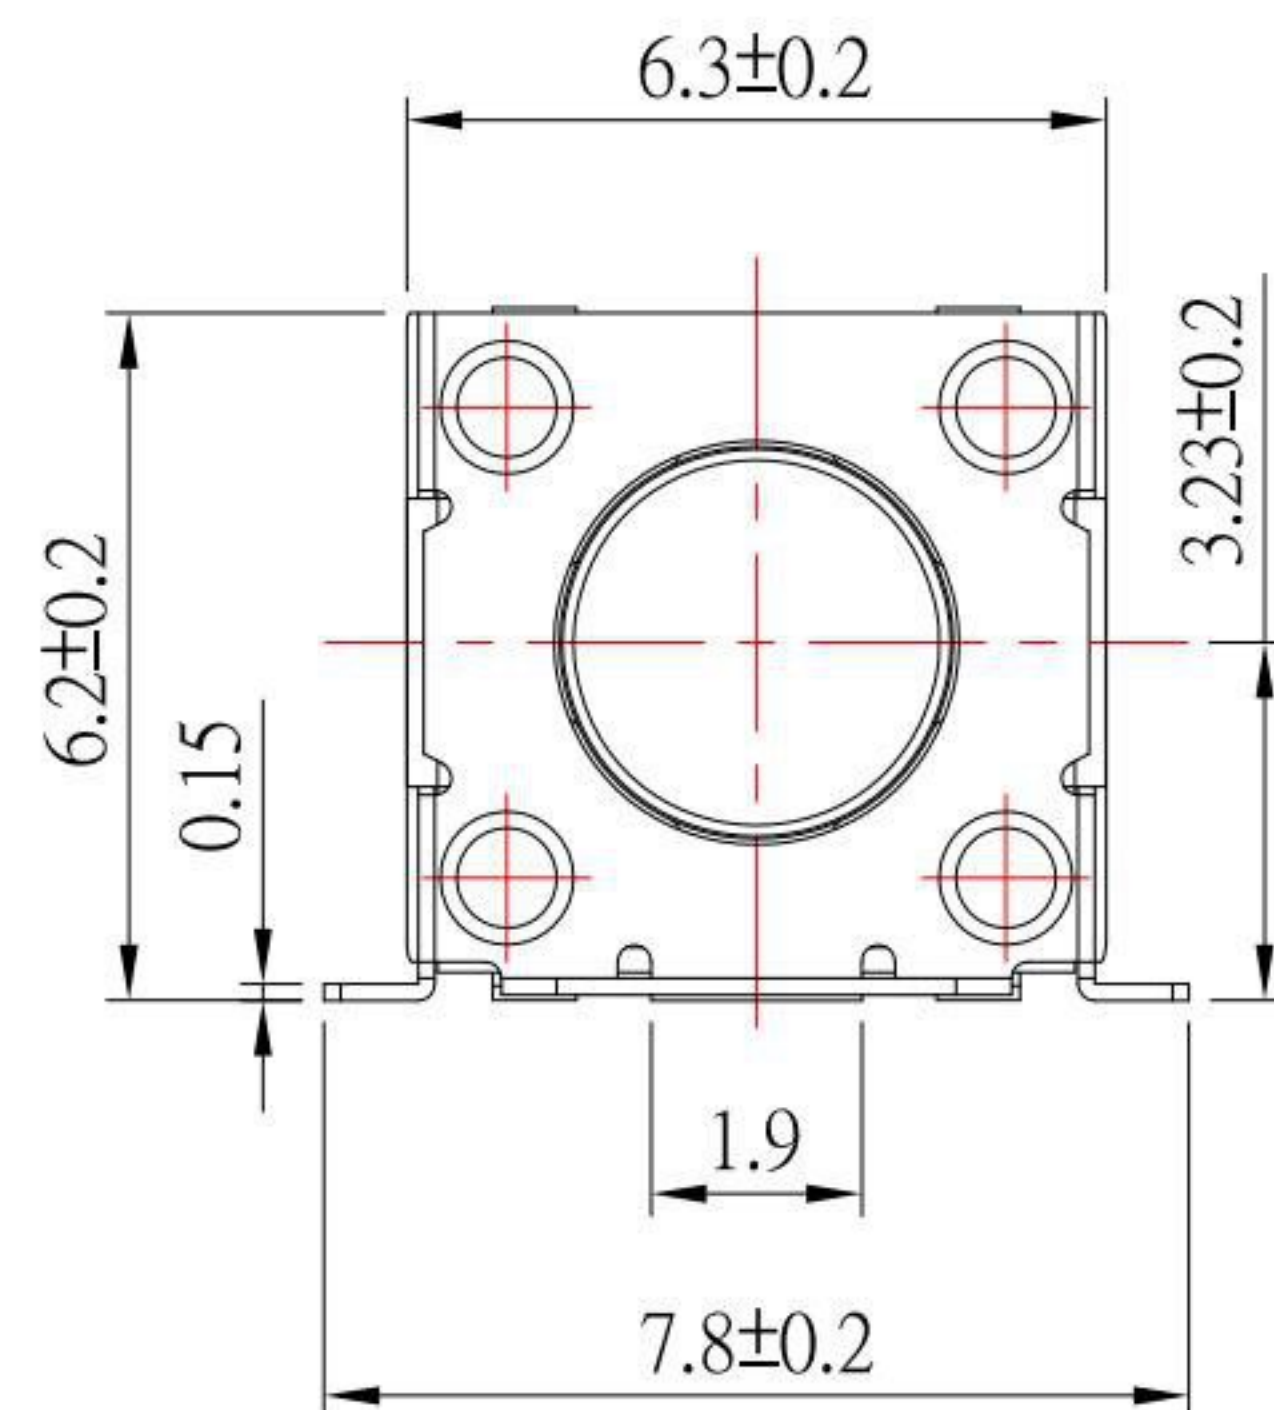


CIRCUIT DIAGRAM



MODEL NO.	TS-A58VS4	TS-A58VS4A	TS-A58VS4B
L (mm)	4.40	4.90	2.30
H (mm)	7.25	7.75	5.15

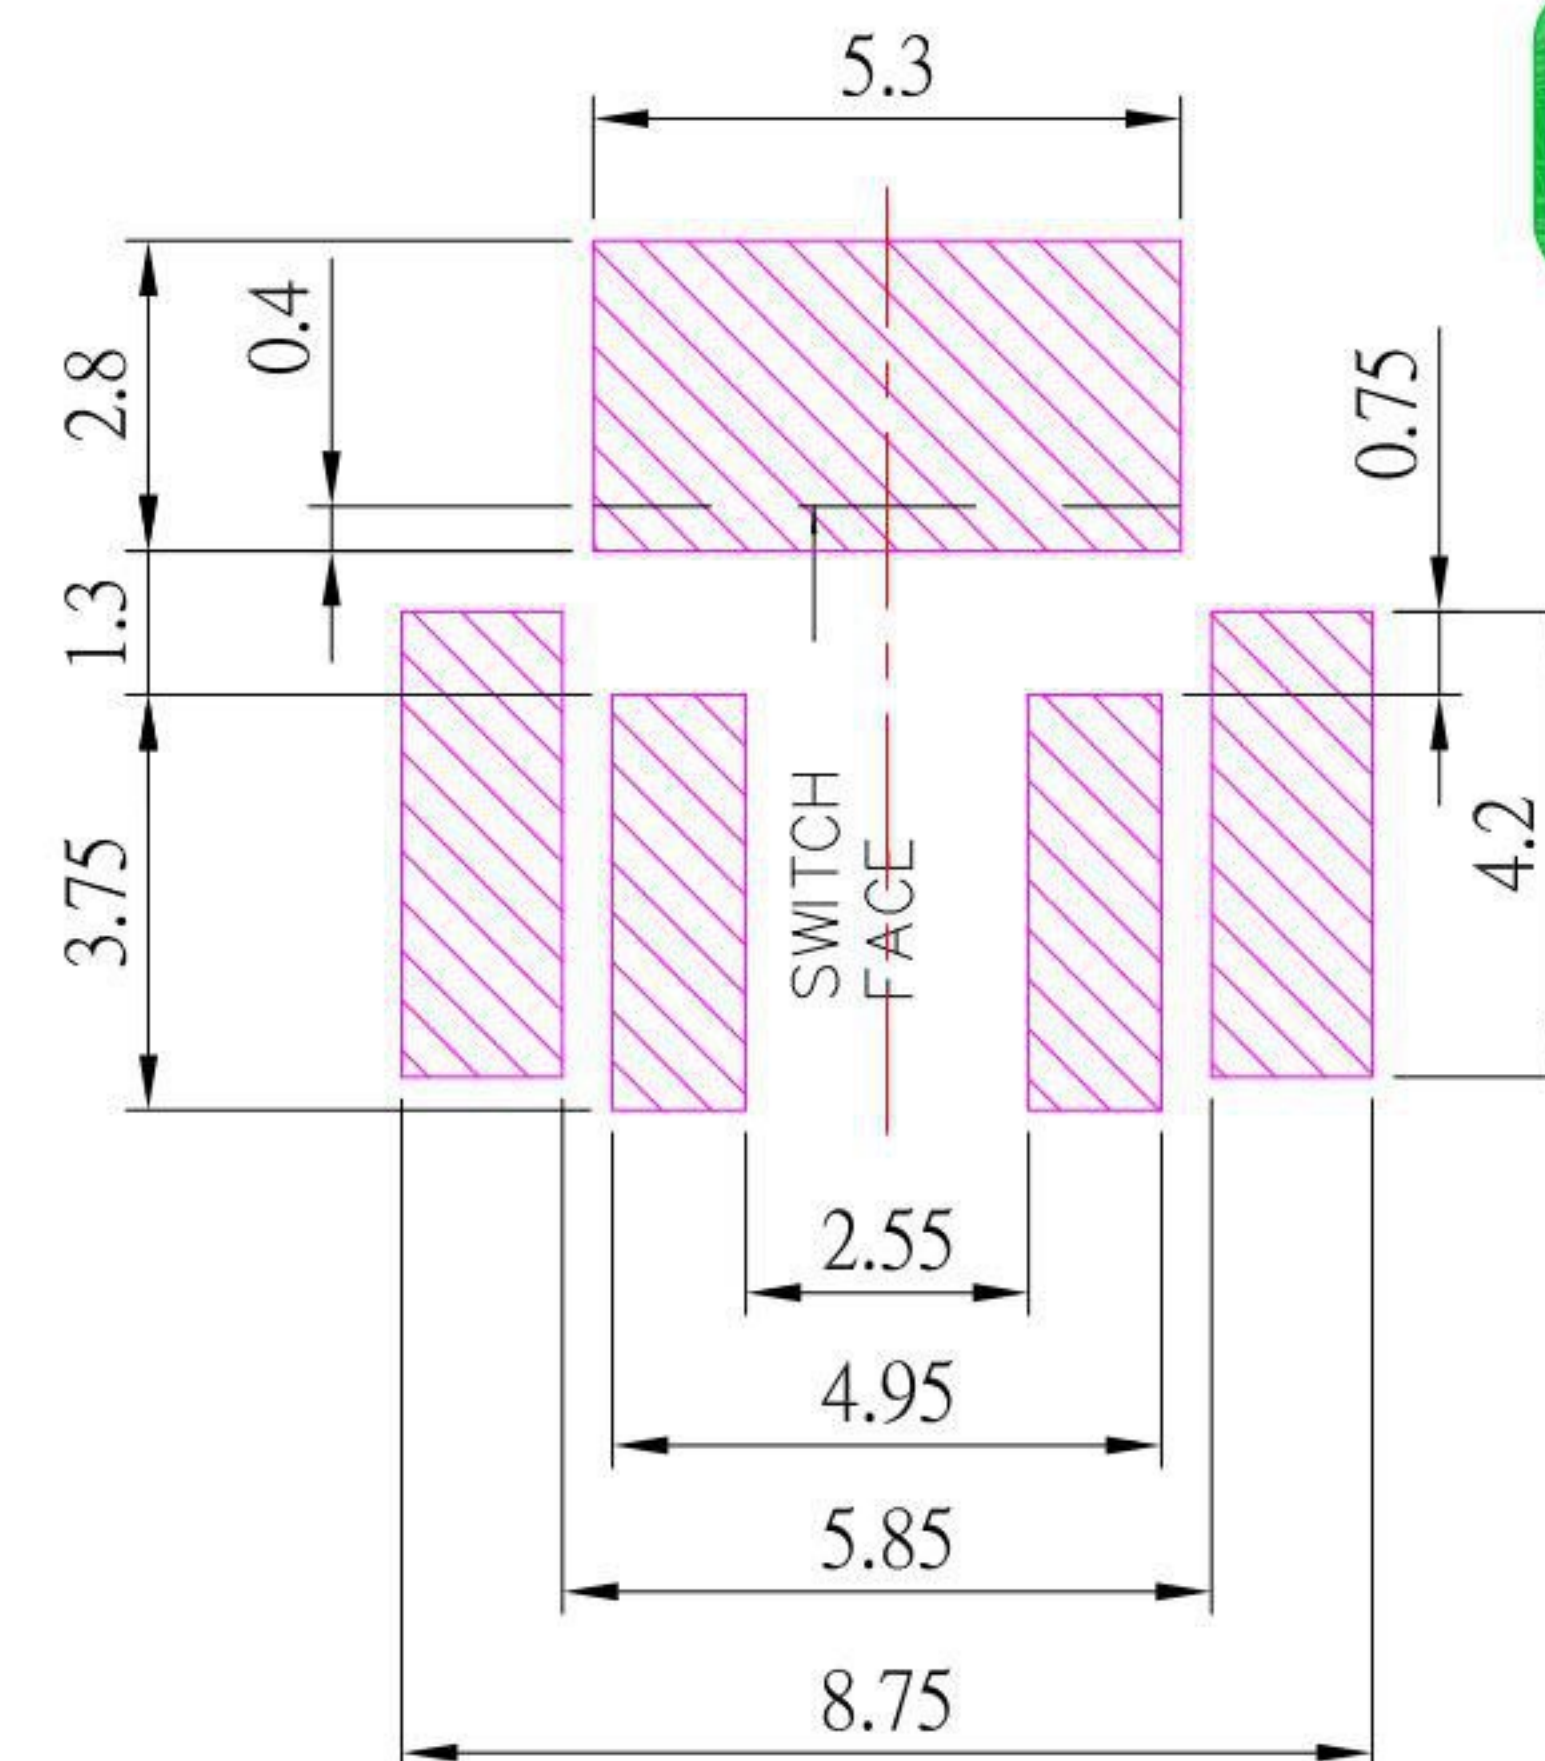

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	030±0.10mm		
Operating Force	2	180± 50gf	3 250± 50gf
Operating Life (cycles)	200,000	100,000	

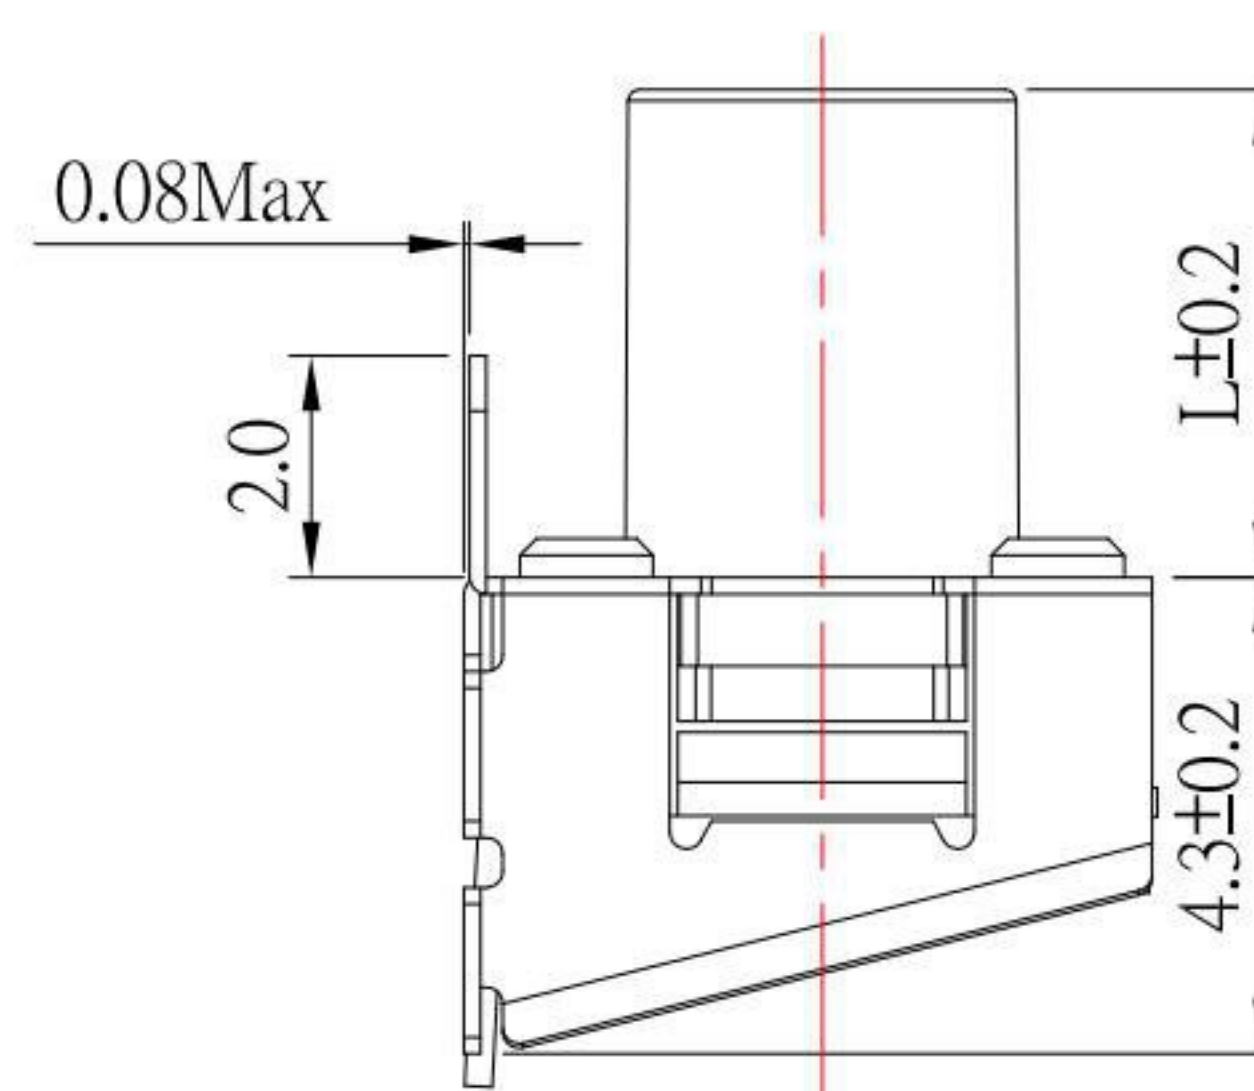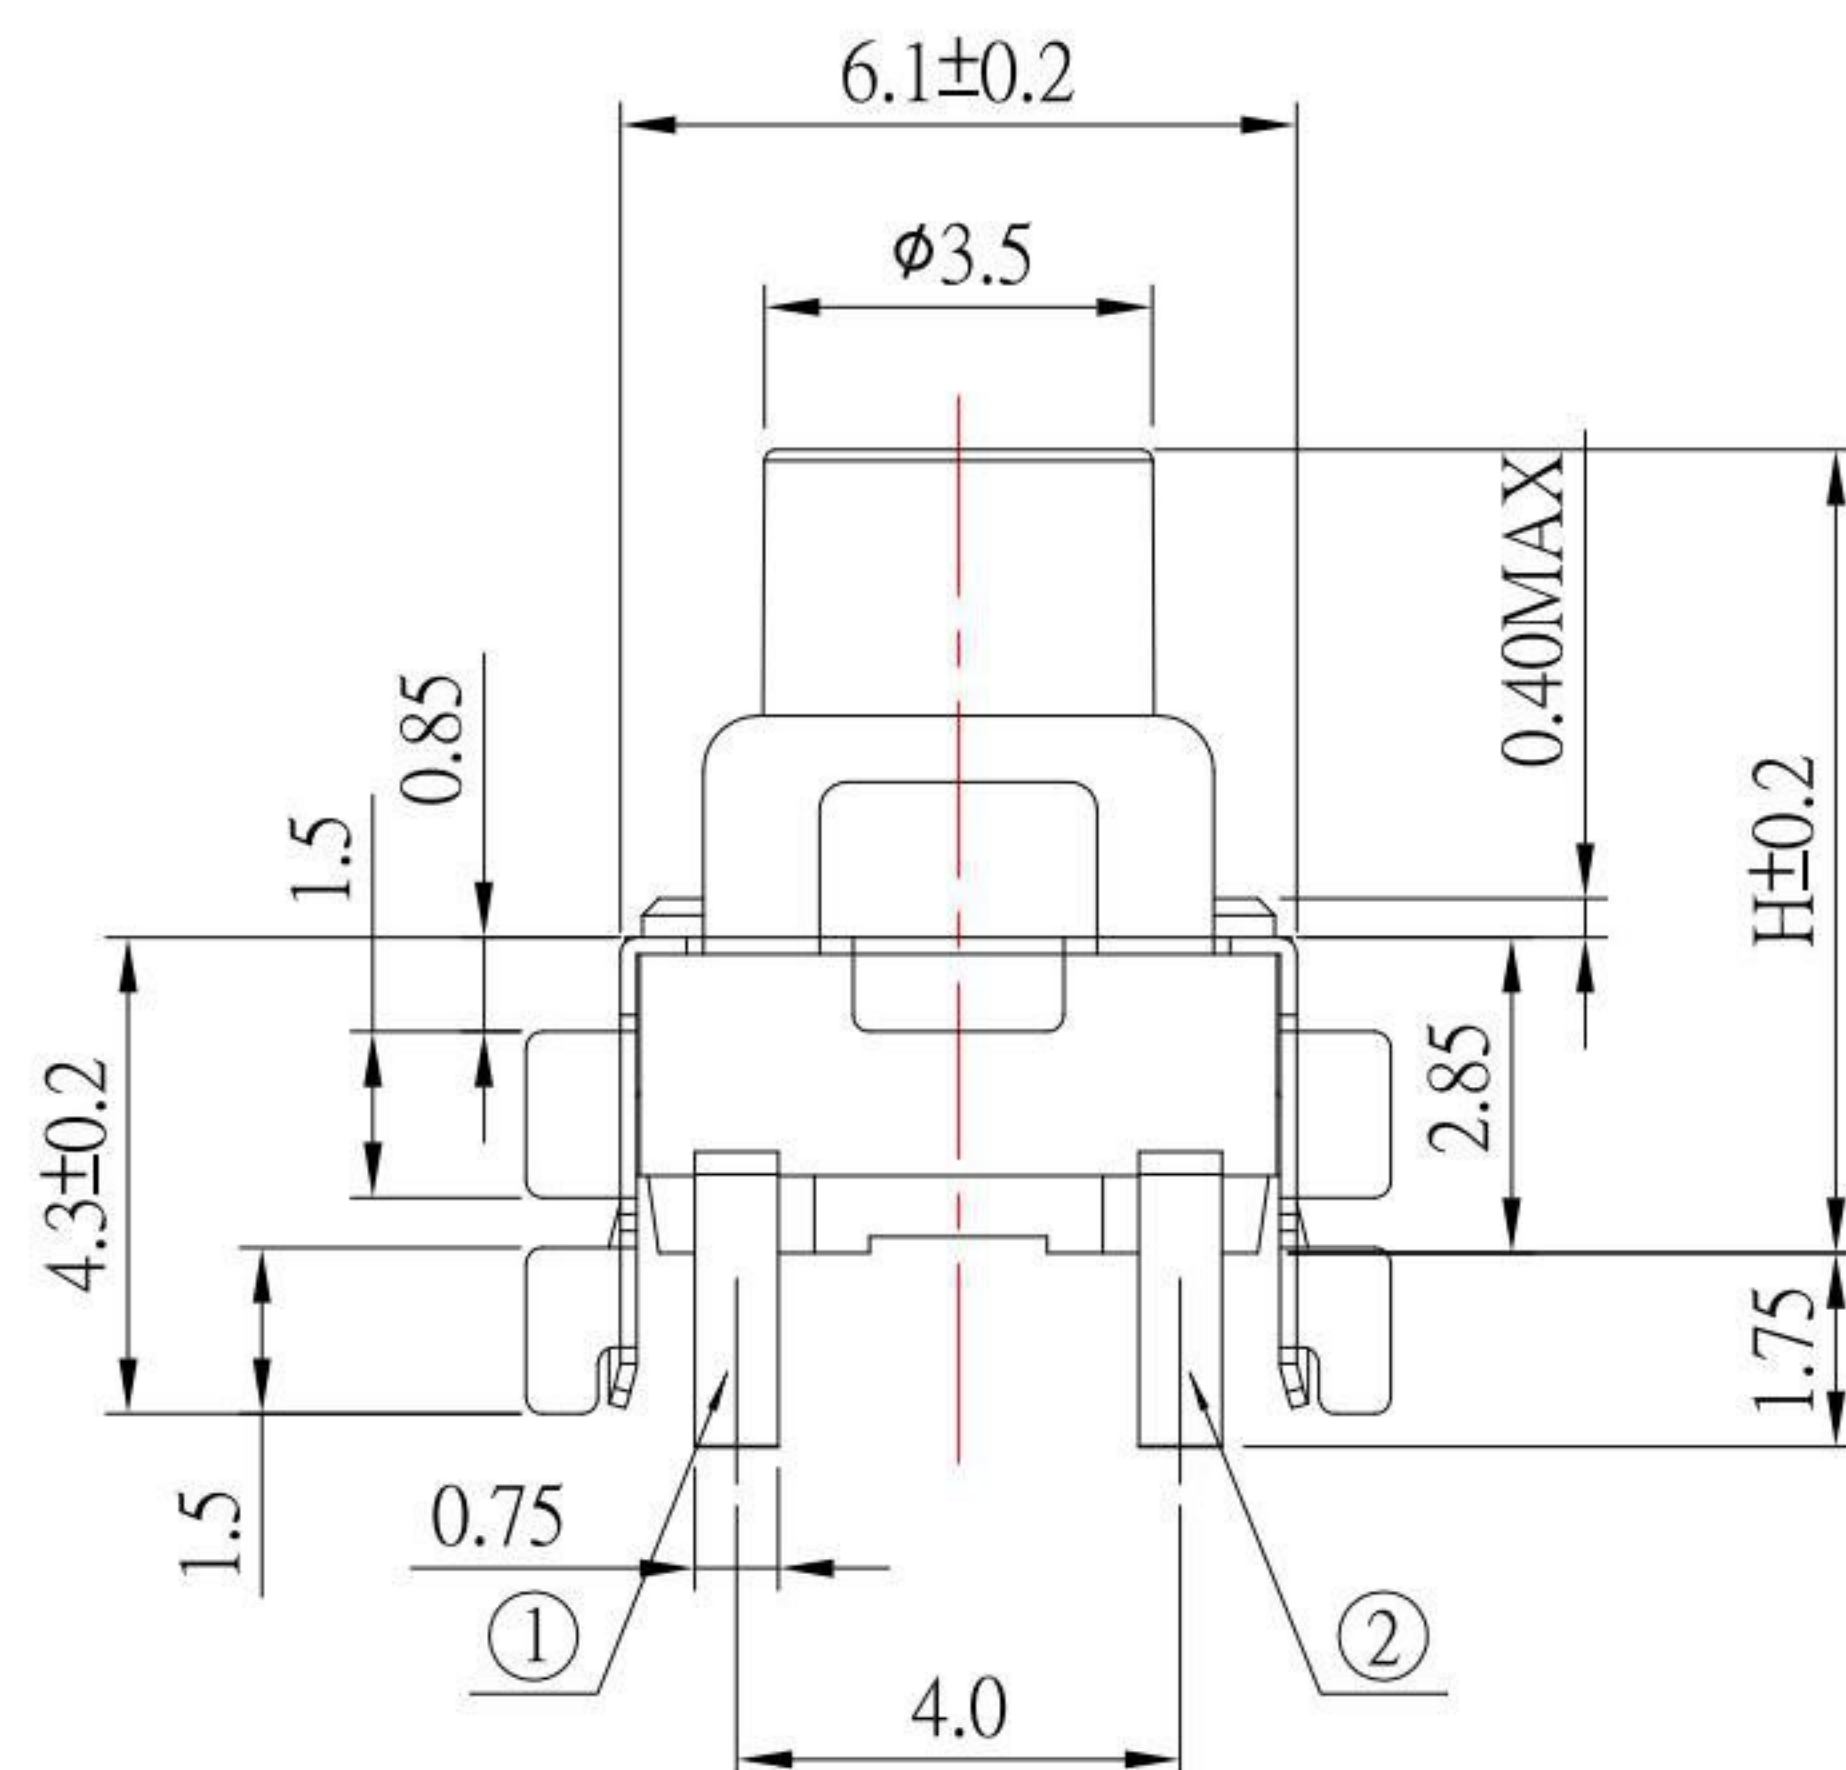


G	STEM	1	PPA	
F	COVER	1	SUS	Ag plated
E	PRESSURE PAD	1	PPA	
D	RUBBER PAD	1	SILICA GEL	
C	CONTACT	1	SUS	Ag plated
B	TERMINAL	2	H65	Ag plated
A	BASE	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互连零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 01/03/22
DATE: 01/03/22
DATE: 01/03/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: SWITCH
MODLE: TACT SWITCH
DWG NO.: TS-A58VS4x-x-S138
PART NO.: TS-A58VS4x-x-S138

SIZE: A4
VER: R1

1	更新圖面	Jack	010323
ITEM NO.	DESCRIPTION	DRAWN	DATE