
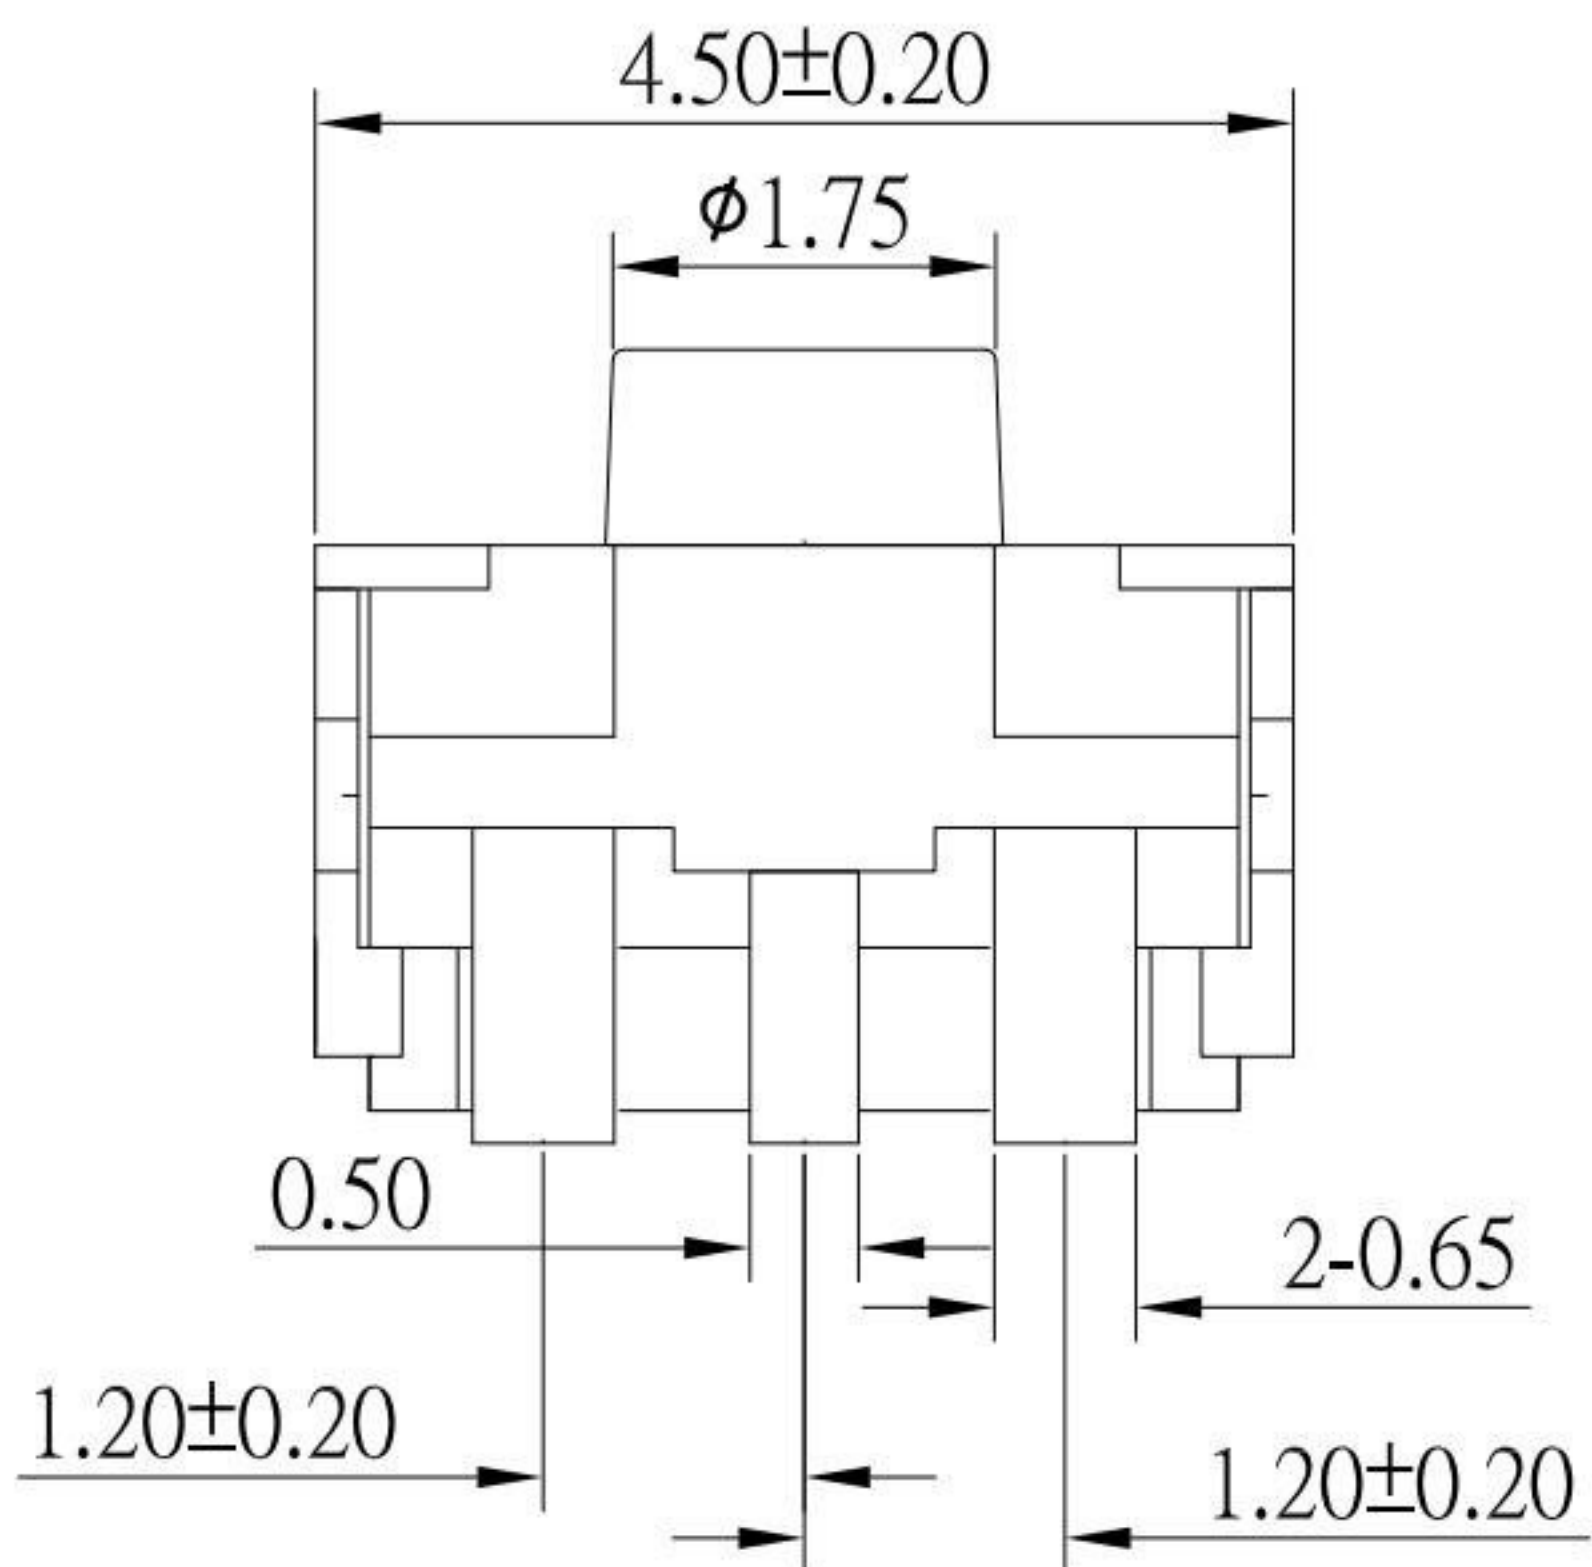
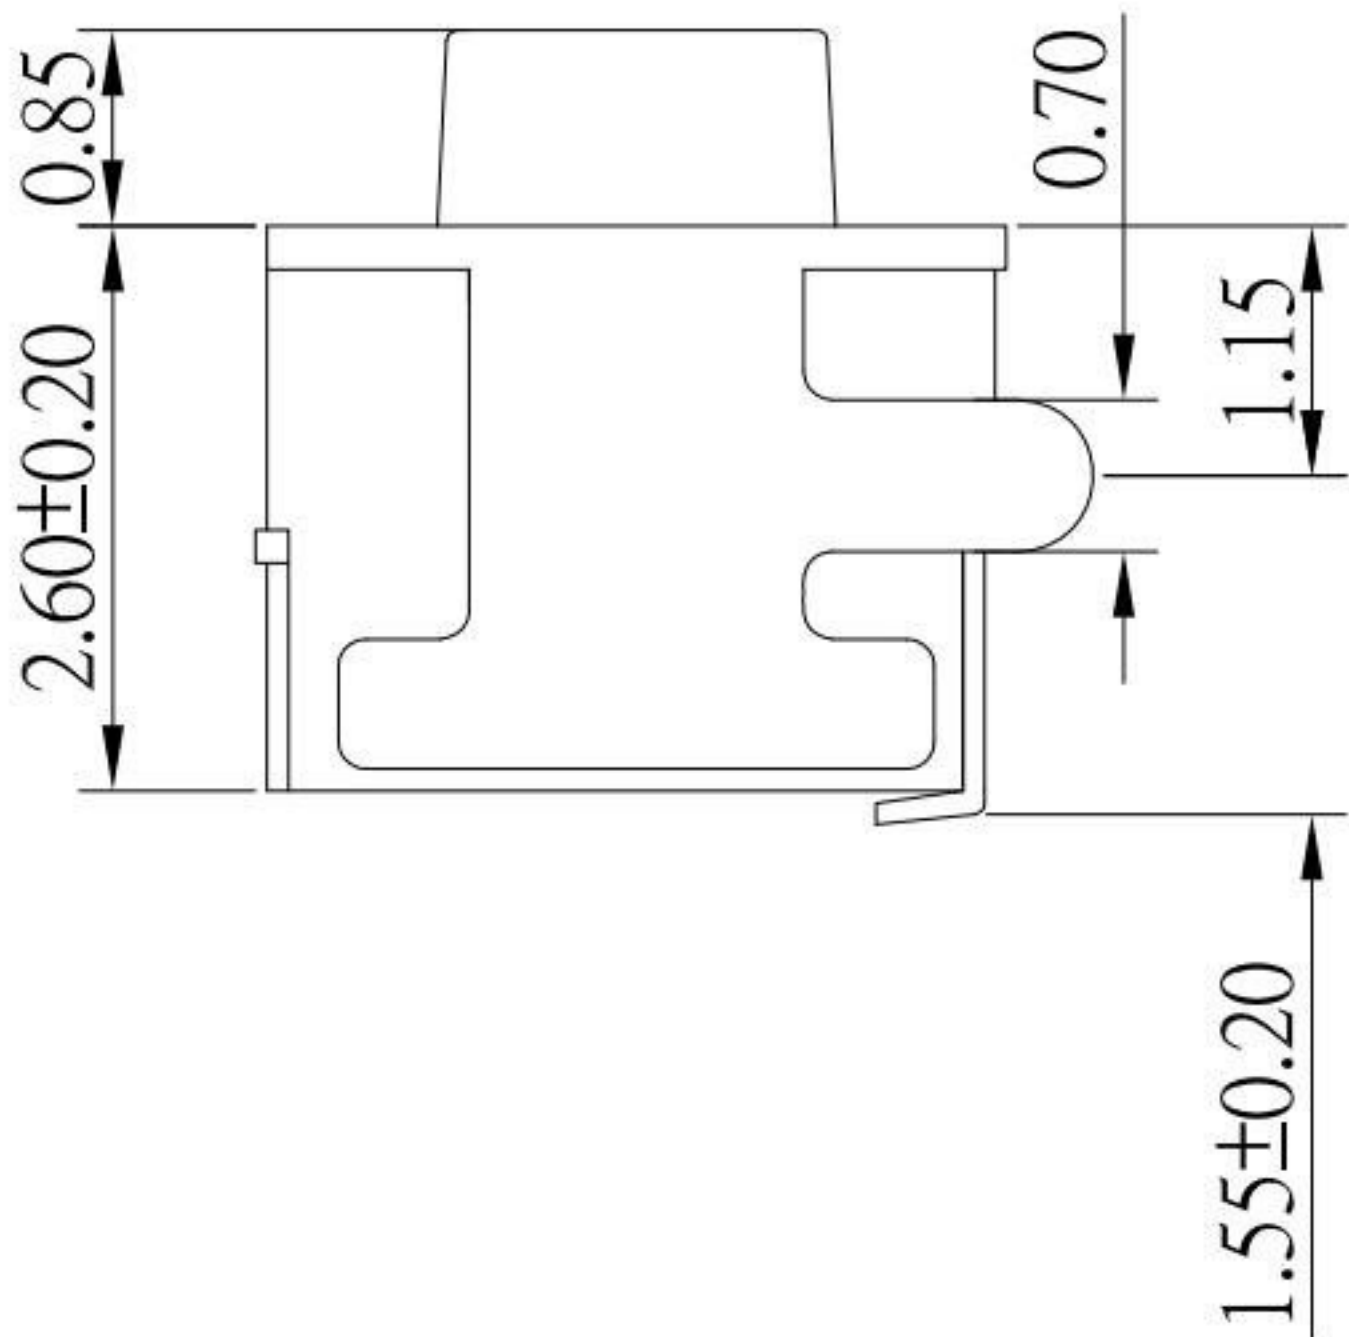
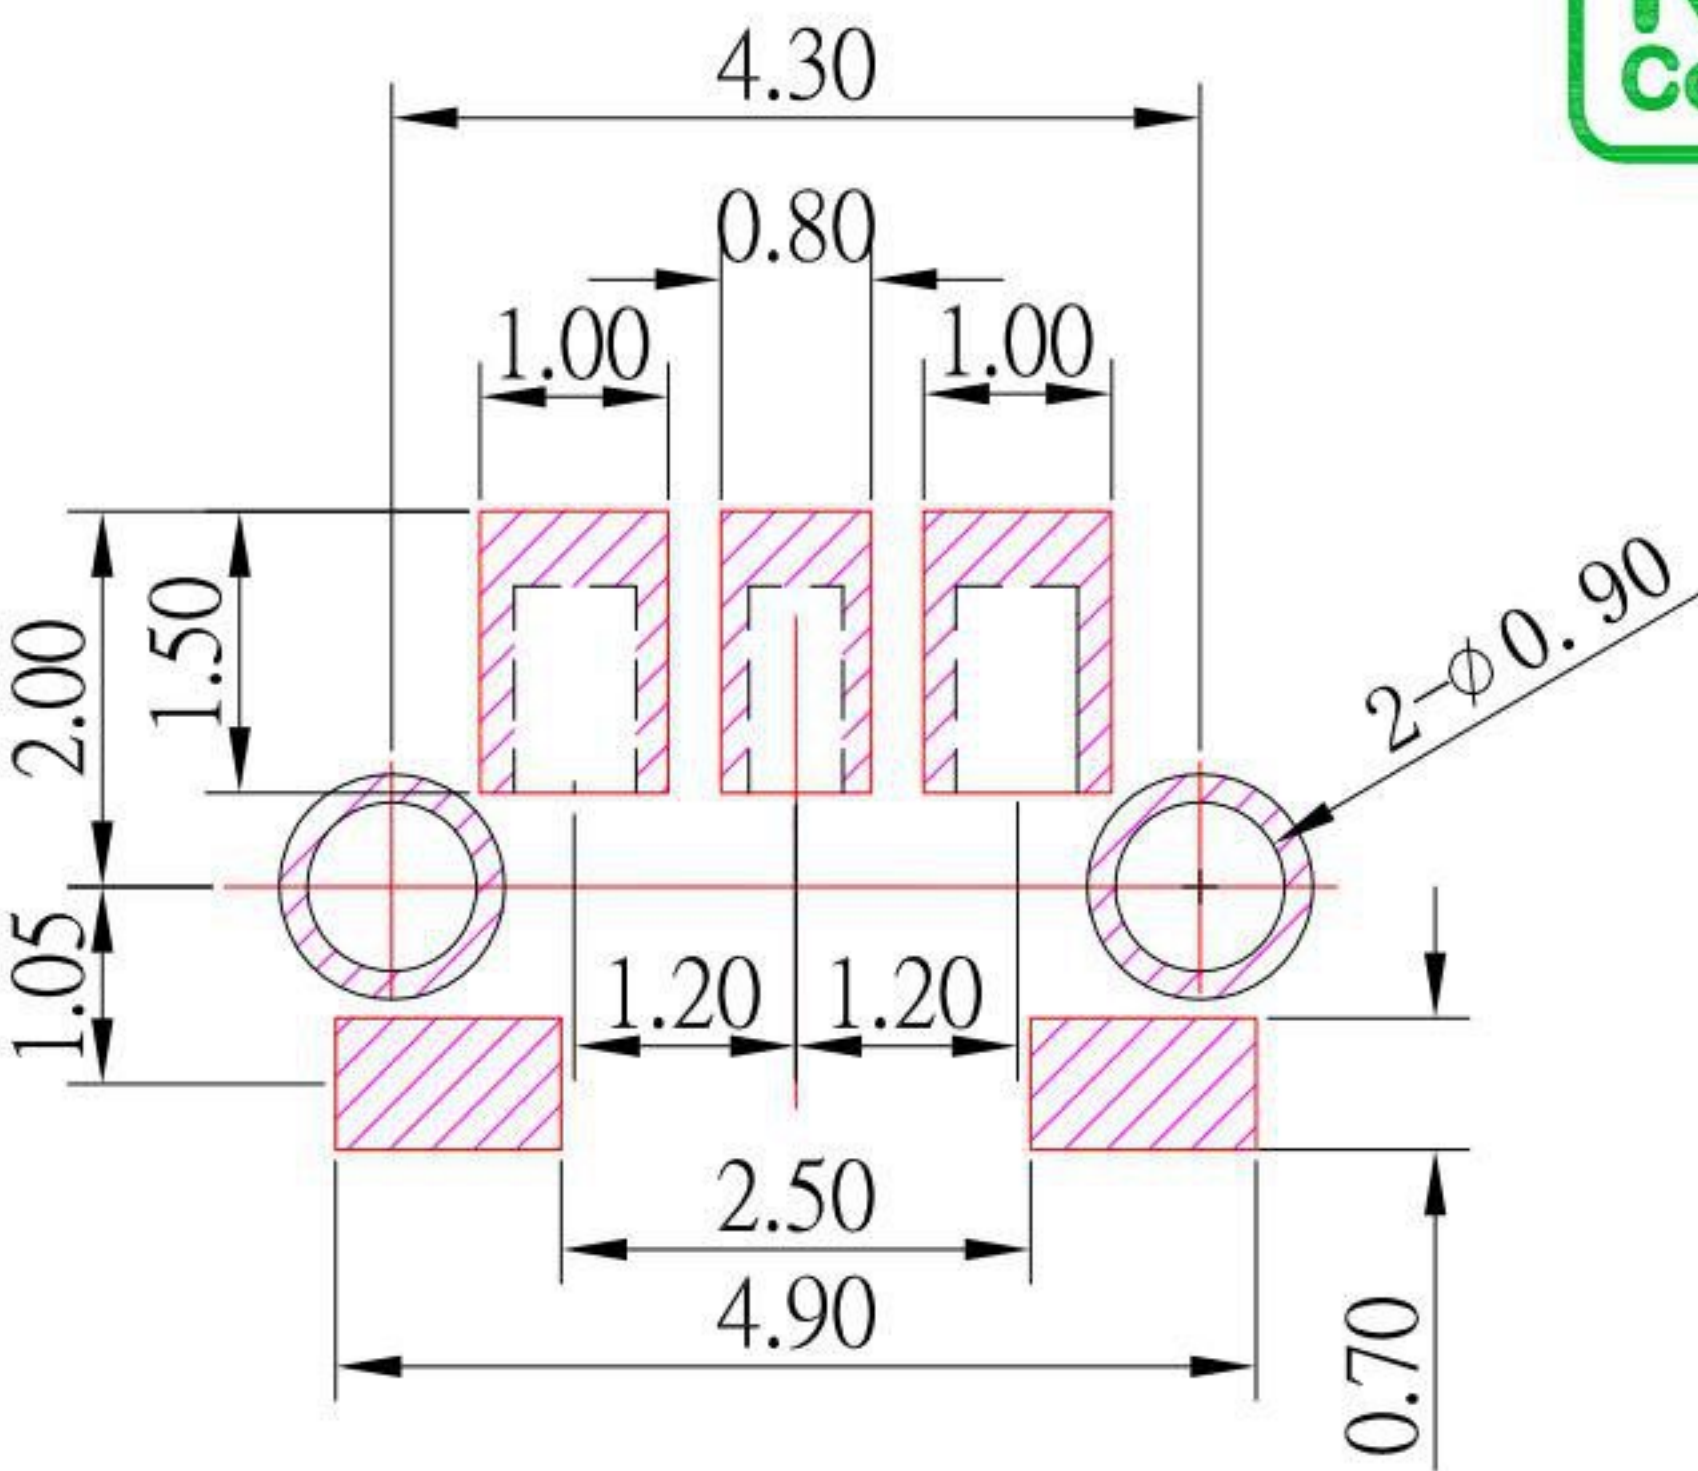
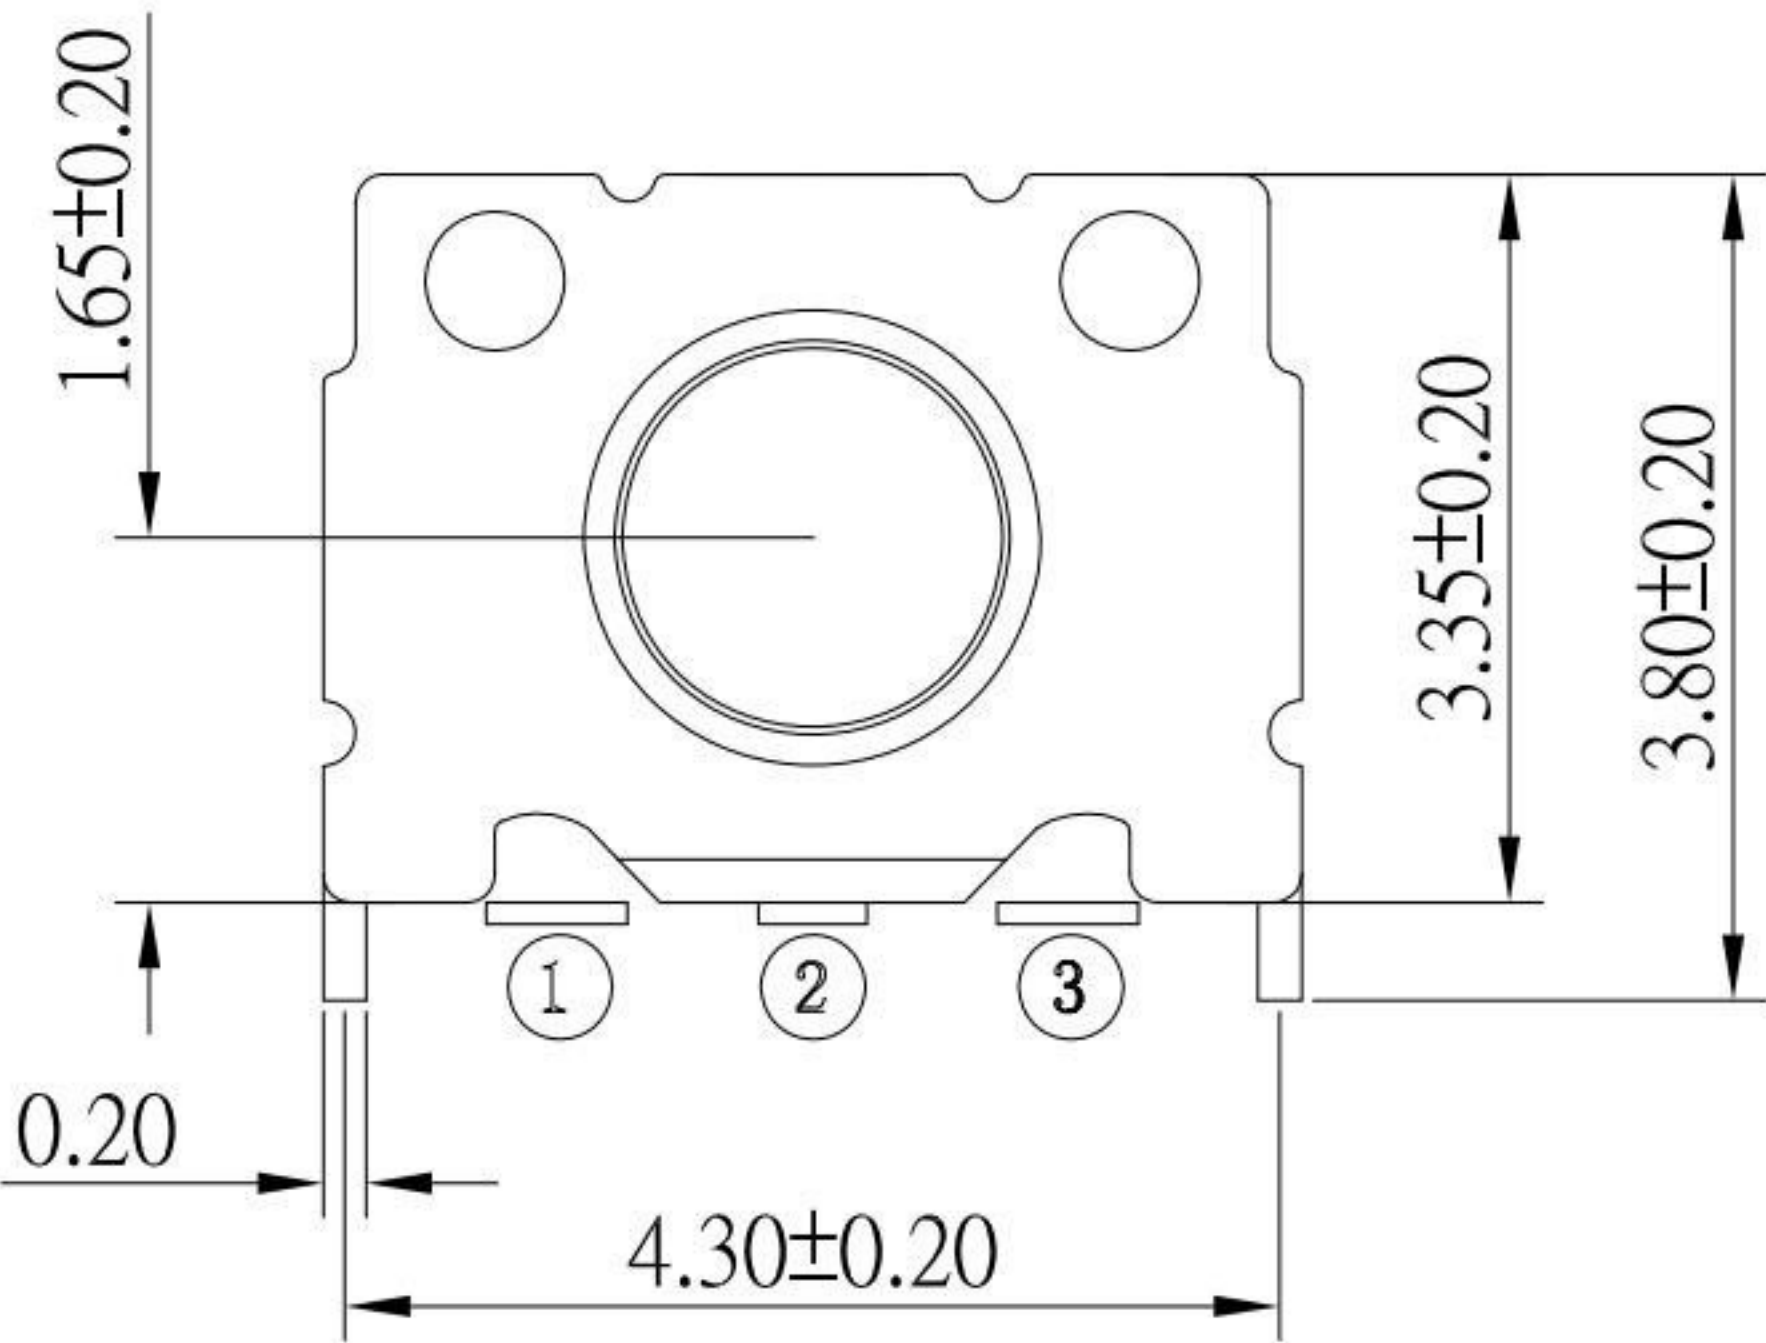


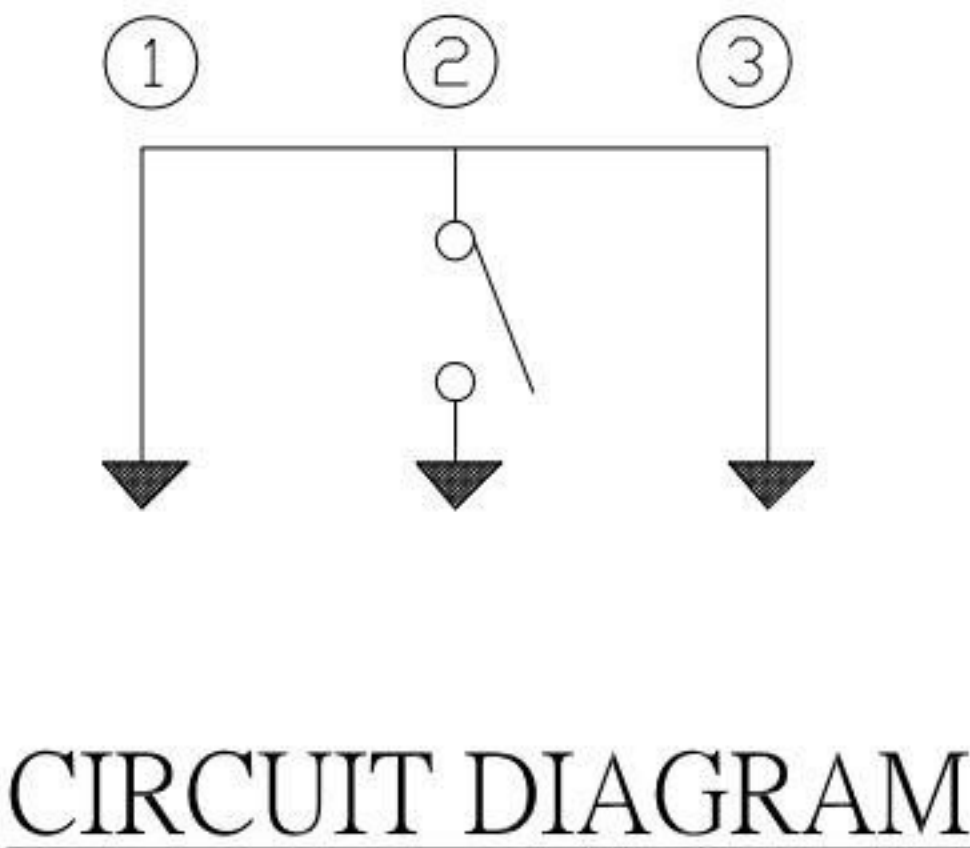

SPECIFICATIONS

Rating	DC 12V 50mA.		
Insulation Resistance	100 MΩ Min.		
Contact Resistance	100 mΩ Max.		
Operating Force	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	100,000		

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	Black
A	STEM	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

10	更新圖面	Jack	060320
9	更新料號新增UL94V-0	Jack	051820
8	新增"HF"標示	Jack	042418
7	新增尺寸	Jack	010318
6	更新圖面尺寸	Jack	112317
5	更新PCB LAYOUT樣式及尺寸	Jack	020317
4	更新PCB LAYOUT樣式	Jack	011717
3	更新SPEC及材質	Jack	061515
2	更新尺寸標示	Jack	050615
1	新增PIN編號	Jack	020315
ITEM NO.	DESCRIPTION	DRAWN	DATE

KSD
SWITCH CONNECTOR
全球互聯零組件製造企業

科斯达电子科技有限公司
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/03/20			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH 無鹵/防火等級94V-0
Jacky Chen	06/03/20			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-AA2-x-HF-S246
Tony Kao	06/03/20	1 : 1		
		SHEET NO.	PART NO.	TS-AA2-x-HF-S246
		1 of 1		
				SIZE A4
				VER R10