

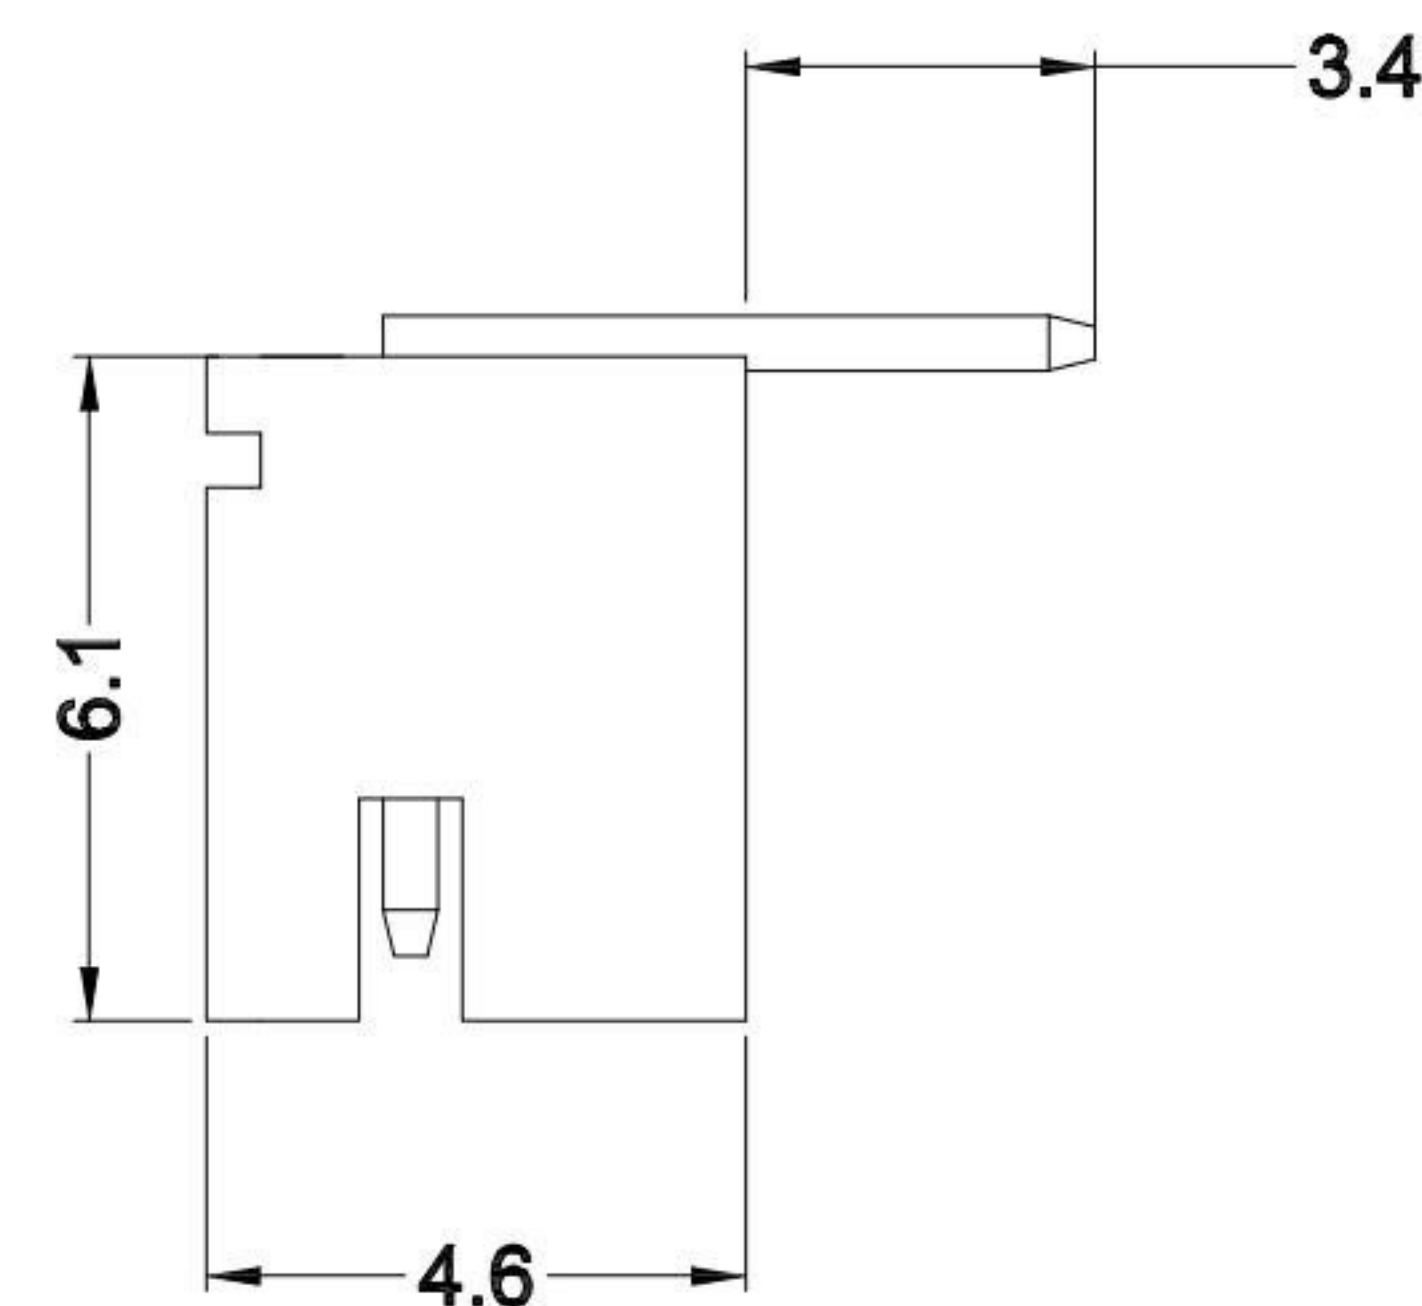


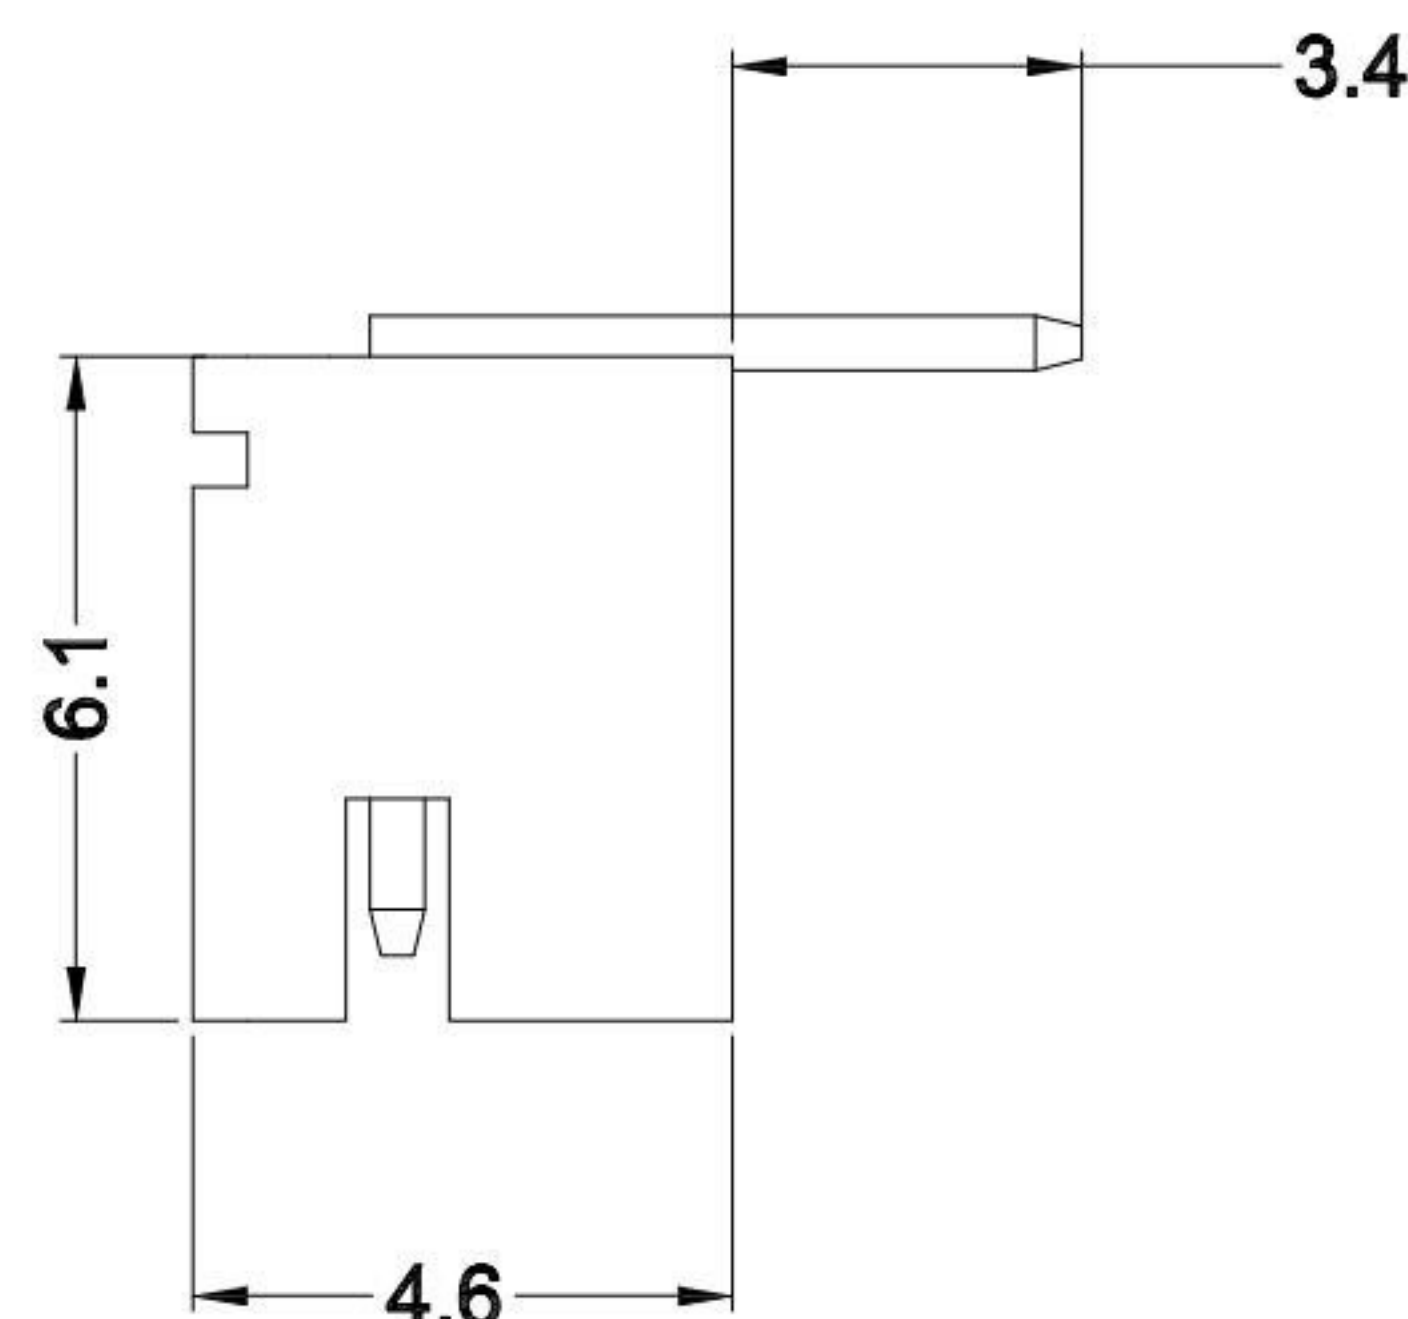




### 3 CIRCUITS OR MORE

### 2 CIRCUITS

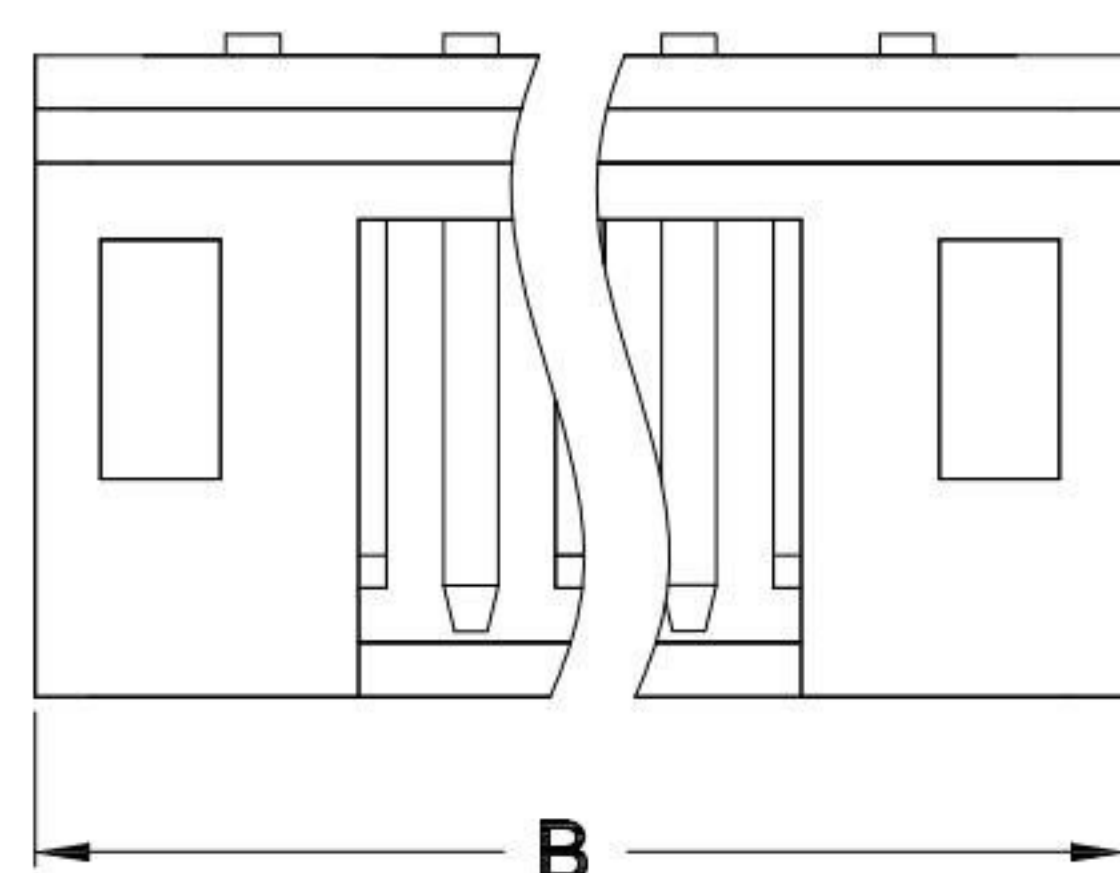

### SPECIFICATIONS

Current rating : 2.0A AC , DC  
Voltage rating : 100V AC , DC  
Temperature rating : -25°C ~ +85°C  
Insulation resistance : 1,000M $\Omega$  min.  
Withstand voltage : 800V AC/minute  
Contact resistance : 20m $\Omega$ /Max  
Material:  
Housing : Nylon 66, UL94V-2  
Pin : Brass / Tin-plated  
Contact : Phosphor Bronze

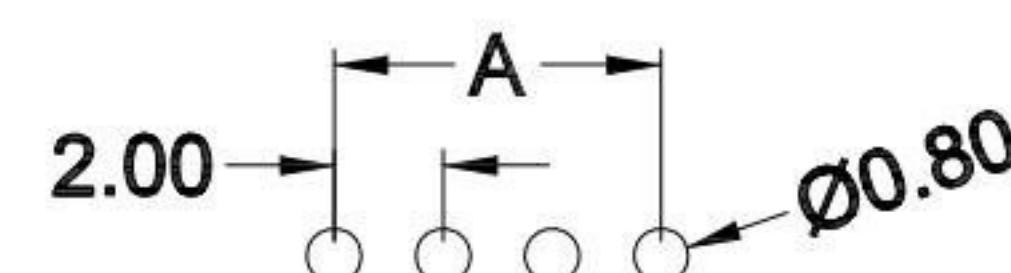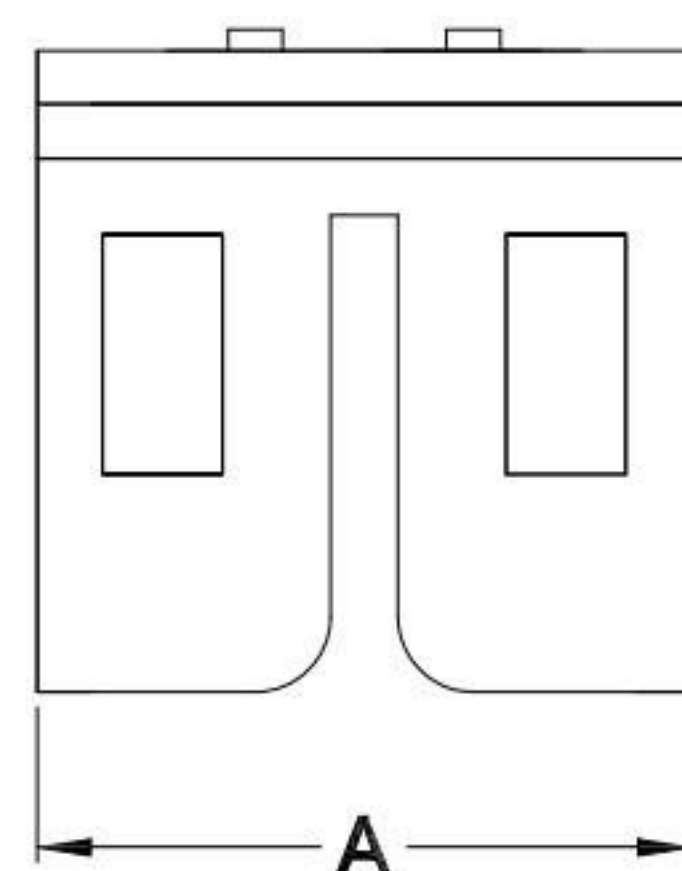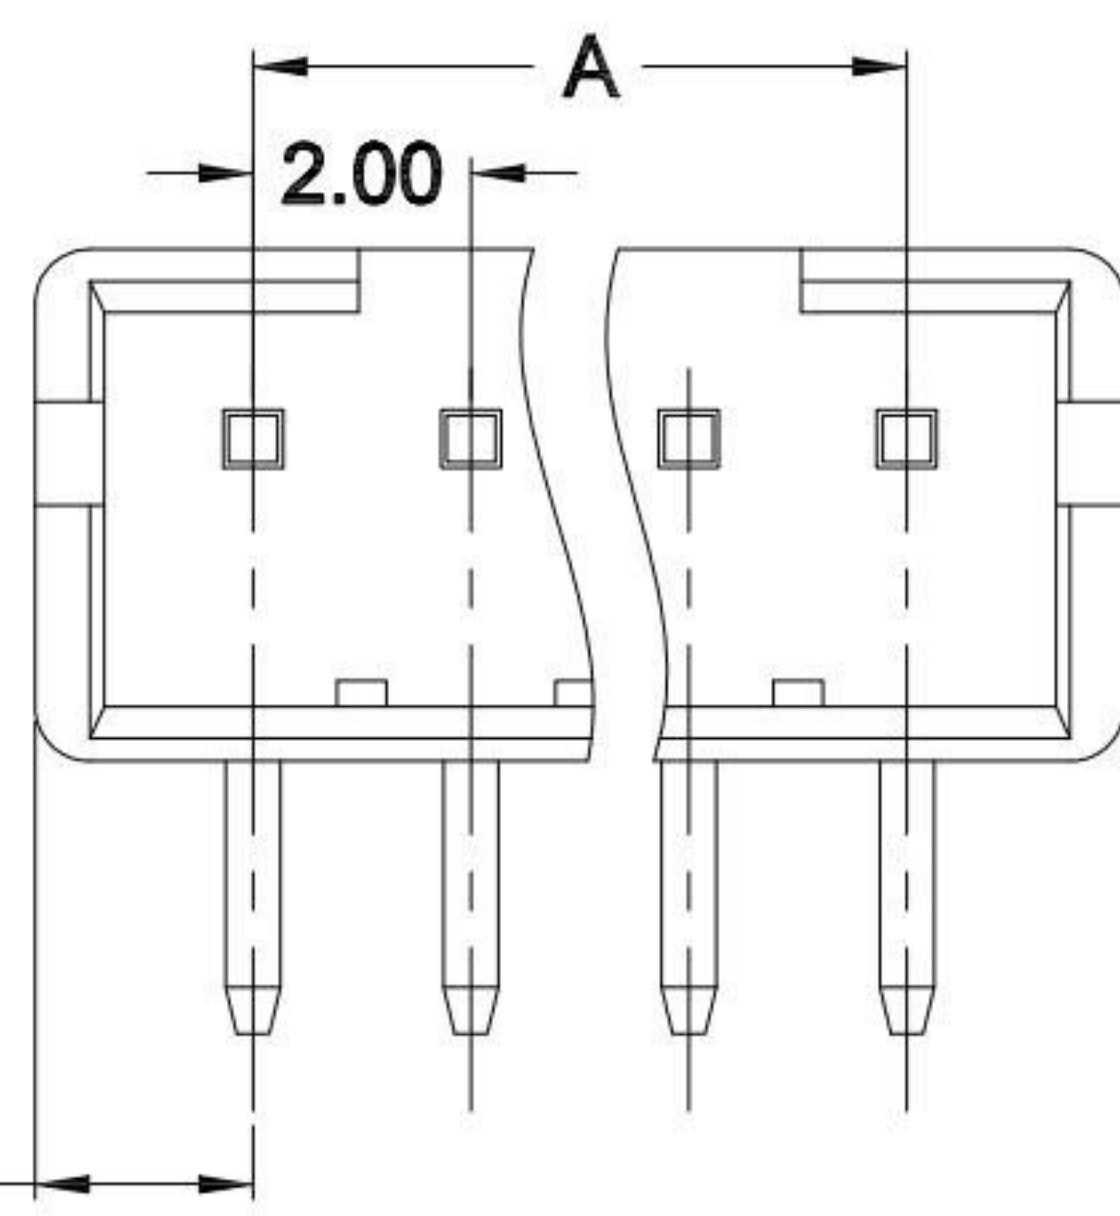


P.C.B LAYOUT MOUNTING PATTERN

| PART NO.    | Dimensions |       |
|-------------|------------|-------|
|             | A          | B     |
| WF-2001RD02 | 2.00       | 6.00  |
| WF-2001RD03 | 4.00       | 8.00  |
| WF-2001RD04 | 6.00       | 10.00 |
| WF-2001RD05 | 8.00       | 12.00 |
| WF-2001RD06 | 10.00      | 14.00 |
| WF-2001RD07 | 12.00      | 16.00 |
| WF-2001RD08 | 14.00      | 18.00 |
| WF-2001RD09 | 16.00      | 20.00 |
| WF-2001RD10 | 18.00      | 22.00 |
| WF-2001RD11 | 20.00      | 24.00 |
| WF-2001RD12 | 22.00      | 26.00 |
| WF-2001RD13 | 24.00      | 28.00 |
| WF-2001RD14 | 26.00      | 30.00 |
| WF-2001RD15 | 28.00      | 32.00 |
| WF-2001RD16 | 30.00      | 34.00 |
| WF-2001RD17 | 32.00      | 36.00 |
| WF-2001RD18 | 34.00      | 38.00 |

**KSD** 科斯达电子科技有限公司  
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 11/13/12  
DATE: 11/13/12  
DATE: 11/13/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER 2.0 DIP 90度 不打K (JST)

WF-2001RDxx-S208

WF-2001RDxx-S208

SIZE  
A4  
VER  
R