
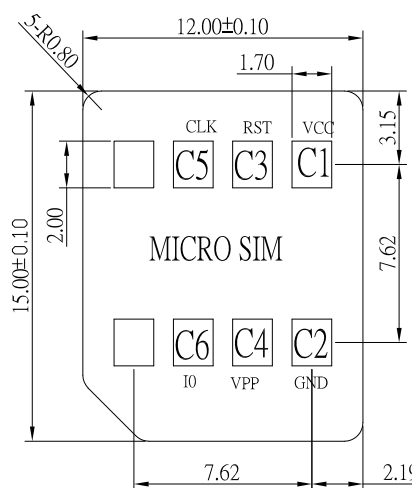
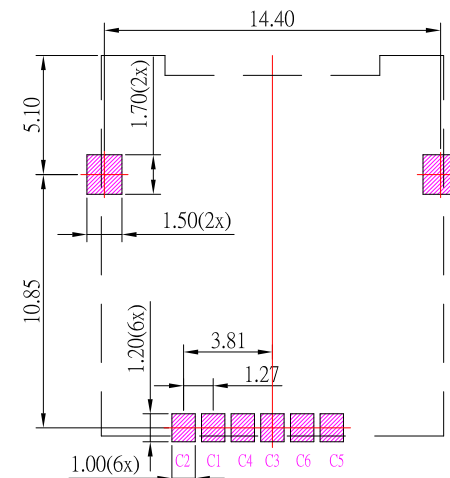
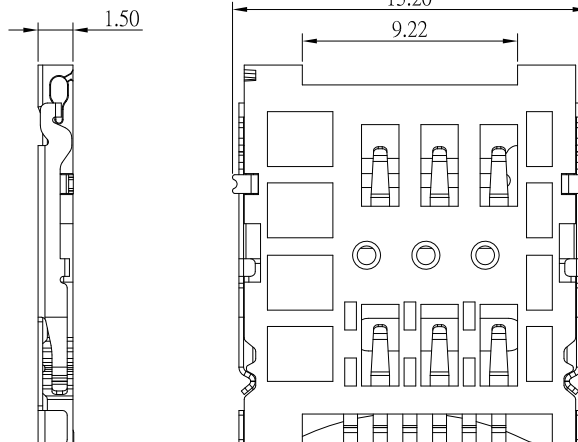


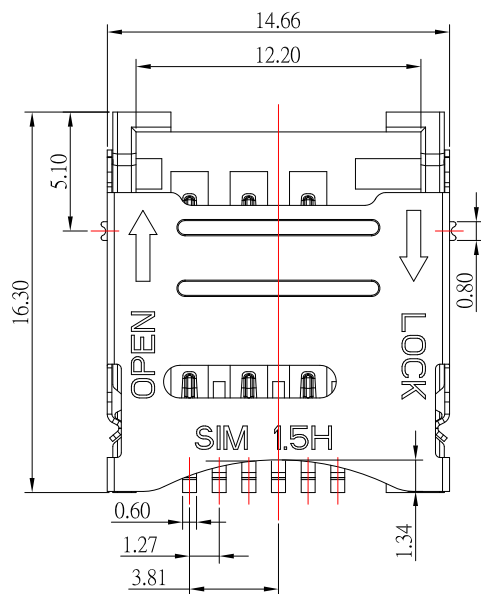

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I0

Electrical :

- 1.Rating: 1.0A
- 2.Contact Resistance: 50 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Dielectrec Withstanding Voltage: 250 V AC
- 5.Operating Temperature: -30℃ ~ +80℃.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

插卡示意圖



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
J. J. J.	10/11/0

DATE _____

10/11/2

CHECKED BY: _____ DATE _____

DATE _____

Jacky Chen	10/11/20
APPROVED BY:	DATE:

10/11/2

	MAT'L
--	-------

FINISH

SCALE

TITLE	CONNECTOR
-------	-----------

MODLE	MICRO SIM 6PIN H1.5 掀蓋
-------	------------------------

DWG NO.	MSIM-06H150-S267
---------	------------------

[illegible]

	SIZE
--	------

	A4
--	----

VER

	R
--	---