

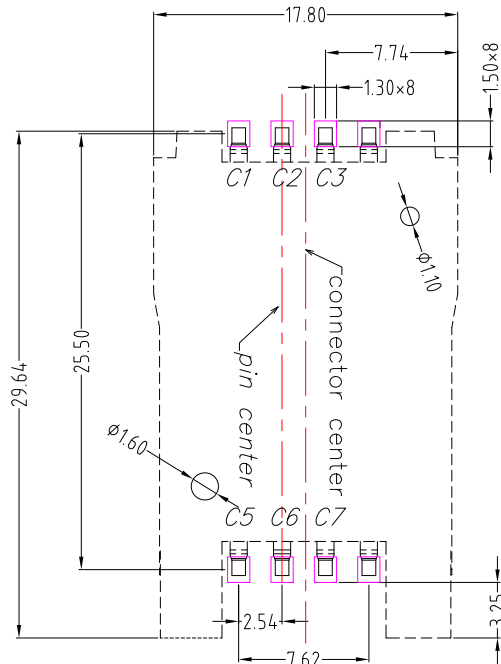
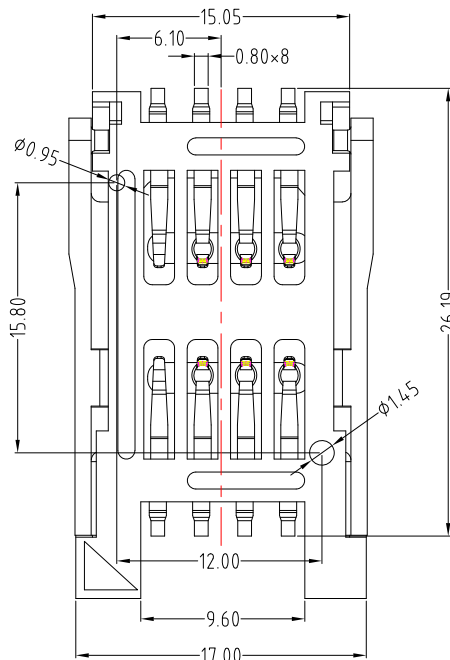


SIM CARD

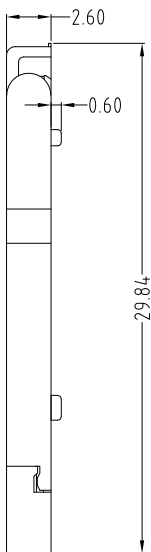

PCB LAYOYT

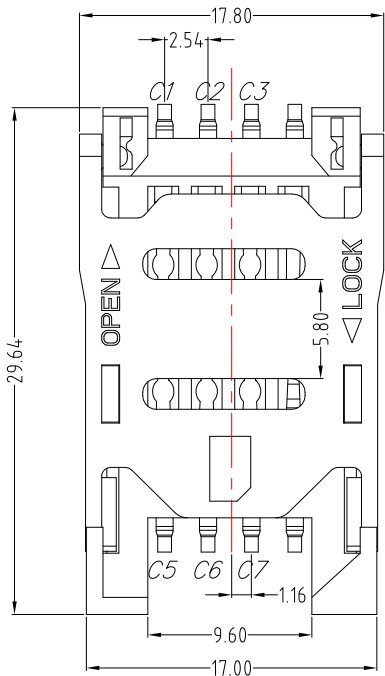

SIM卡引脚功能定义

触电极	分 配	触电极	分 配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O
C4	Reserved备用	C8	Reserved备用

SPECIFICATION

Electrical :

- 1.Current Rating: 1.0A
- 2.Voltage Rating: 50V AC/DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:


- 1.Operating Temperature: -40°C ~ 85°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Cover: LCP

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

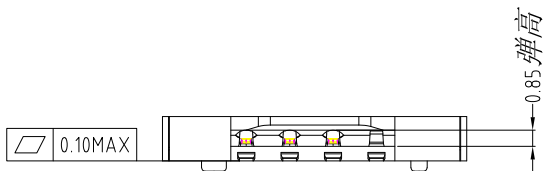

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/03/24

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

06/03/24

FINISH

MODLE

SIM掀盖全塑8P有柱PH2.54

APPROVED BY:

Tony Kao

DATE

06/03/24

SCALE

1 : 1

DWG NO.

SIM-043108A-S267

SHEET NO.

1 of 1

PART NO.

SIM-043108A-S267

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE