


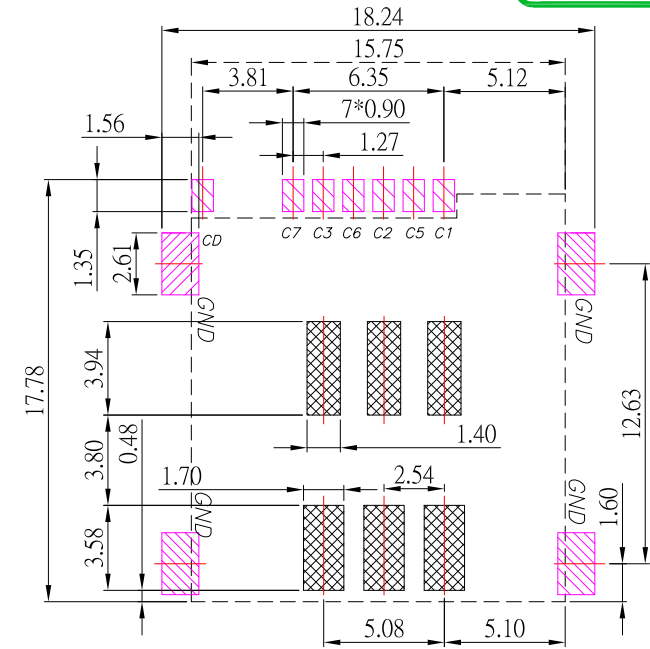
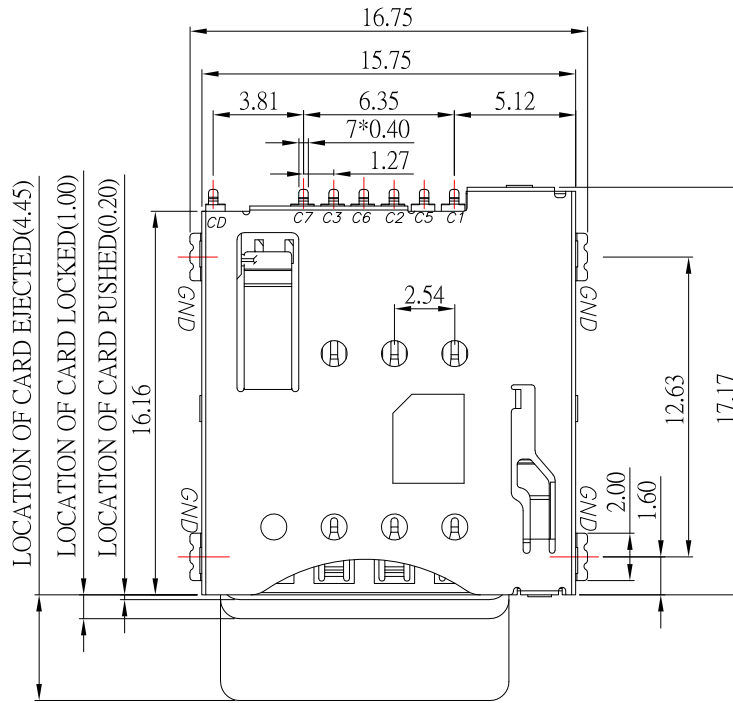
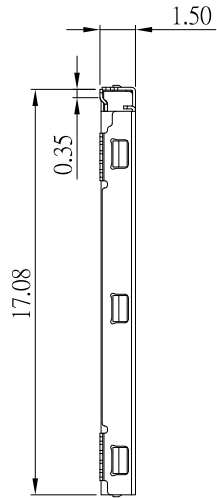


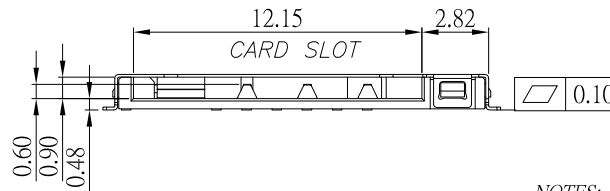

P.C.B LAYOUT



ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



NOTES:

1) MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

2) FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

GOLD PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3) ELECTRICAL CHARACTERISTICS

3.1 RATING CURRENT: 1.0 A

3.2 RATING VOLTAGE: 30V

3.3 CONTACT RESISTANCE: 50 mΩ MAX

3.4 INSULATION RESISTANCE: 1000MΩ MIN

4.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

4.6 OPERATING TEMPERATURE: -40°C ~ +85°C



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 06/03/24
CHECKED BY: Jacky Chen
DATE: 06/03/24
APPROVED BY: Tony Kao
DATE: 06/03/24

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO SIM CARD CONNECTOR
6+1PIN PUSH H1.50mm
MSIM-150007-S267
MSIM-150007-S267

SIZE
A4
VER
R

ITEM NO. DESCRIPTION DRAWN DATE