

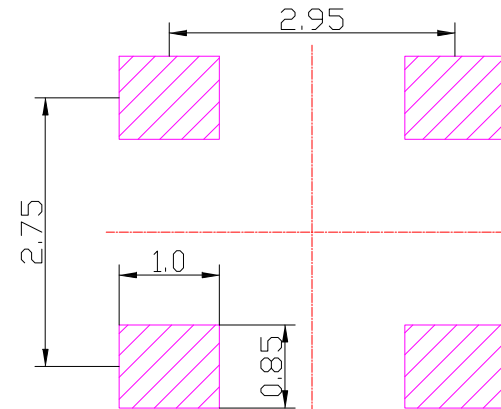


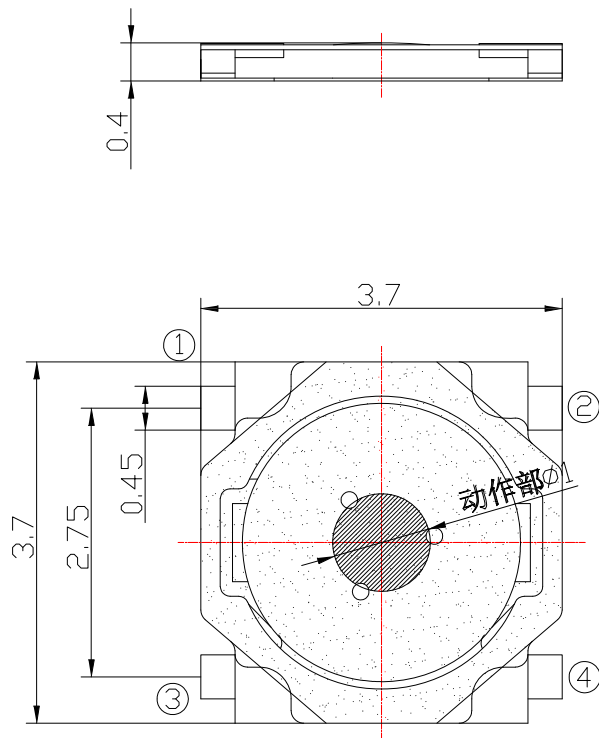

P.C.B LAND PATTERN

### SPECIFICATIONS

|                                 |                           |
|---------------------------------|---------------------------|
| Rating                          | 50mA 12V DC               |
| Insulation Resistance           | 100MΩ Min.                |
| Dielectric Withstanding Voltage | AC 250 V                  |
| Contact Resistance              | 100mΩ Max.                |
| Operating Force                 | 2 160 ± 50gf 3 260 ± 50gf |
| Operating Life(cycles)          | 70,000                    |



CIRCUIT DIAGRAM

|     |             |     |                 |           |
|-----|-------------|-----|-----------------|-----------|
| D   | FILM        | 1   |                 |           |
| C   | CONTACT     | 1   | SUS             | Ag plated |
| B   | BASE        | 1   | LCP(Black)      |           |
| A   | THERMINAL   | 4   | PHOSPHOR BRONZE |           |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING   |



广东科斯达电子科技有限公司  
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|              |          |           |          |               |
|--------------|----------|-----------|----------|---------------|
| DRAWN BY:    | DATE     | MATL      | TITLE    | SWITCH        |
| Jack Lu      | 12/30/22 |           |          |               |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | TACT SWITCH   |
| Jacky Chen   | 12/30/22 |           |          |               |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | TS-A96-x-S410 |
| Tony Kao     | 12/30/22 | 1 : 1     |          |               |
|              |          | SHEET NO. | PART NO. | TS-A96-x-S410 |
|              |          | 1 of 1    |          |               |
|              |          |           |          | SIZE<br>A4    |
|              |          |           |          | VER<br>R1     |